


Agilent
82351A PCIe™ GPIB Interface Card

Data Sheet

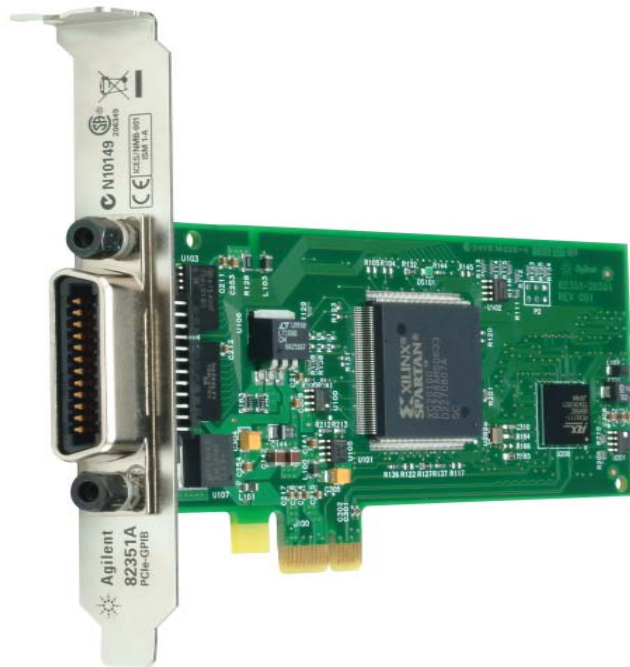

Key Features

- **Compact half-height size (68.9 mm)**
- **High transfer rate of 1.4 MB/s**
- **High flexibility via up-plugging (to x4 or x8 PCIe™ slots)**
- **3.3 V signal level for lower power consumption**
- **Compatibility with industry standard PCIe™ rev 1.0a and IEEE-488**
- **Interface to 14 GPIB instruments (max)**

Recommended use

- **Bandwidth-intensive test applications**
- **Adding GPIB connection for PCIe™-based PCs or workstations**

High transfer rate for demanding test applications

Agilent 82351A PCIe™-GPIB interface card is designed for integration into next generation PCs or workstations. It offers fast data transmission for various demanding test applications that require data to be transferred to memory fast enough without any lost or overwritten.

PCIe™ (PCI Express®) is an evolution-ary version of PCI that offers a higher transfer rate across a low number of wires. It is also backward-compatible with PCI software, so you don't need to perform any code re-configuration. PCIe™'s powerful bus architecture allows bi-directional data transmission, and the implementation of a new class of test applications.

82351A Technical Specifications

General requirements

Minimum system requirements	Windows® 2000/XP
Software required	Agilent IO Libraries Suite 14.2 and above, with the following requirements: <ul style="list-style-type: none">• Windows® XP Pro or Home edition service pack 1 or later• Windows® 2000 Pro service pack 4 or later and Microsoft Internet Explorer 5.01 or greater• 450 MHz Intel Pentium® processor and 800x600 display with 256 colors• 128 megabytes RAM and 225 MB total hard disk space• Supported APIs include Agilent or NI VISA, SICL, VISA-COM and NI-488.2
PCI bus slot	3.3 V PCIe™ slot, 32 bits
Supported standards	PCIe™ rev. 1.0a IEEE 488.1 and IEEE 488.2 compatible

General characteristics

Power	Backplane +3.3 V PCIe™
Connectors	Standard 24-pin (IEEE-488) +1.5 V PCIe™
Maximum data rate	1.4 MB/s or better
Maximum instrument connection	14 instruments—daisy chain via GPIB
Buffering	Built-in
Configuration	Plug-and-Play
EMC and safety *	IEC 61010-1:2001 / EN61010-1:2001 Canada: CSA C22.2 No. 61010-1:2004 IEC 61326:2002/EN61326:1997+A1:1998+A2:2001+A3:2003 Pollution Degree 2 This product is rated for indoor use only
Warranty	1 year

Dimensions

Width, depth and height	158.0 mm (W) x 120.8 mm (D) x 21.6 mm (H)
Weight	0.082 kg

Environmental specifications

Operating environment	–5 °C to 60 °C
Operating humidity	Up to 90% at 40 °C non-condensing
Storage environment	–40 °C to 70 °C
Storage humidity	Up to 90% at 65 °C non-condensing

* **Additional detail and information in the Declaration of Conformity**



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

Windows is U.S. registered trademarks of Microsoft Corporation.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:

(tel) 800 829 4444
(fax) 800 829 4433

Canada:

(tel) 877 894 4414
(fax) 800 746 4866

China:

(tel) 800 810 0189
(fax) 800 820 2116

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800
(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100
(fax) (65) 6755 0042
Email: tm_ap@agilent.com
Revised: 11/08/06

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2007
Printed in USA, July 3, 2007
5989-7049EN



Agilent Technologies