

# Agilent E8267C PSG Vector Signal Generators

Data Sheet



All specifications and characteristics apply over a 0 to 55 °C range (unless otherwise stated) and apply after a 45 minute warm-up time. Supplemental characteristics, denoted as typical or nominal, provide additional (non-warranted) information.

## PSG Signal Generators

	Option 520 250 kHz to 20 GHz	Option 540 250 kHz to 40 GHz
<b>CW only</b>	E8247C	E8247C
<b>Analog</b>	E8257C	E8257C
<b>Vector</b>	E8267C	

(See E8247C/E8257C data sheet for PSG CW and analog signal generator specifications)

## Definitions

**Specifications (spec):** represent warranted performance.

**Typical (typ):** performance is not warranted. It applies at 25 °C. A minimum of 80% of all products meet typical performance.

**Nominal (nom):** values are not warranted. They represent the value of a parameter that is most likely to occur; the expected or mean value. They are included to facilitate the application of the product.

**Standard (std):** No options are included when referring to the signal generator unless noted otherwise.



Agilent Technologies

# Table of Contents

- Specifications** .....3
  - Frequency .....3
  - Digital sweep .....4
  - Ramp (analog) sweep .....4
  - Output .....5
  - Spectral purity .....7
  - Frequency modulation .....10
  - Phase modulation .....10
  - Amplitude modulation .....10
  - Wideband AM .....11
  - External modulation inputs .....11
  - Simultaneous modulation .....11
  - Internal modulation source .....11
  - Pulse modulation .....12
  - Internal pulse generator .....13
  - Vector modulation .....14
  - I/Q baseband generator: arbitrary waveform mode .....15
  - I/Q baseband generator: real-time mode .....17
  - Wideband external I/Q inputs .....19
  - Remote programming .....20
  - General specifications .....20
  
- Input/Output Descriptions** .....20
  - Front panel connectors .....20
  - Rear panel connectors .....21
  - Auxiliary I/O connector .....23
  
- Options, Accessories, and Related Products** .....23
  
- Web Resources** .....24
  
- Related Agilent Literature** .....24

# Specifications

## Frequency

<b>Range<sup>1</sup></b>		
Option 520	250 kHz to 20 GHz	
<b>Resolution</b>		
CW	0.001 Hz	
All Sweep Modes	0.01 Hz <sup>2</sup>	
<b>Accuracy</b>		
Aging rate ± temperature effects ± line voltage effects		
<b>Switching speed<sup>3</sup></b>		
< 12 ms (typical)		
<b>Phase offset</b>		
Adjustable in nominal 0.1 ° increments.		
<b>Frequency bands</b>		
<b>Band</b>	<b>Frequency range</b>	<b>N #</b>
1	250 kHz to 250 MHz	1/8
2	> 250 to 500 MHz	1/16
3	> 500 MHz to 1 GHz	1/8
4	> 1 to 2 GHz	1/4
5	> 2 to 3.2 GHz	1/2
6	> 3.2 to 10 GHz	1
7	> 10 to 20 GHz	2
<b>Internal timebase reference oscillator</b>		
<b>Aging rate</b>	<b>Standard</b>	<b>Option UNR</b>
	< ±1 x 10 <sup>-7</sup> /year or < ±4.5 x 10 <sup>-9</sup> /day after 45 days	< ±3 x 10 <sup>-9</sup> /year or < ±2.5 x 10 <sup>-10</sup> /day after 30 days
<b>Temperature effects (typical)</b>	< ±5 x 10 <sup>-8</sup> 0 to 55 °C	< ±4.5 x 10 <sup>-9</sup> 0 to 55 °C
<b>Line voltage effects (typical)</b>	< ±2 x 10 <sup>-9</sup> for +5% –10% change	< ±2 x 10 <sup>-10</sup> for ±10% change
	<b>External reference frequency</b>	1, 2, 2.5, 5, 10 MHz
Lock range	±0.2 ppm	±1.0 ppm
<b>Reference output</b>		
Frequency	10 MHz	
Amplitude	> +4 dBm into 50 Ω load (typical)	
<b>External reference input</b>		
Amplitude	> –3 dBm	
Option UNR	5 dBm ±5 dB <sup>4</sup>	
Input impedance	50 Ω (nominal)	

1. Useable, but unspecified, down to 100 kHz.
2. In ramp sweep mode (Option 007), resolution is limited with narrow spans and slow sweep speeds. Refer to ramp sweep specifications for more information.
3. To within 0.1 ppm of final frequency above 250 MHz or within 100 Hz below 250 MHz.
4. To optimize phase noise use 5 dBm ± 2 dB.

## Digital sweep

<b>Operating modes</b>	Step sweep of frequency or amplitude or both (start to stop) List sweep of frequency or amplitude or both (arbitrary list)
<b>Sweep range</b>	
Frequency sweep	Within instrument frequency range
Amplitude sweep	Within attenuator hold range
<b>Dwell time</b>	1 ms to 60 s
<b>Number of points</b>	2 to 65535 (step sweep) 2 to 1601 per table (list sweep)
<b>Triggering</b>	Auto, external, single, or GPIB

## Ramp (analog) sweep (Option 007)<sup>1</sup>

<b>Operating modes</b>	Synthesized frequency sweep (start/stop), (center/span), (swept CW) Power (amplitude) sweep (start/stop) Manual sweep RPG control between start and stop frequencies Alternate sweep Alternates successive sweeps between current and stored states		
<b>Sweep span range</b>	Settable from minimum <sup>2</sup> to full range		
<b>Maximum sweep rate</b>	<b>Start frequency</b>	<b>Maximum sweep rate</b>	<b>Max span for 100 ms sweep</b>
	250 kHz to < 0.5 GHz	25 MHz/ms	2.5 GHz
	0.5 to < 1 GHz	50 MHz/ms	5 GHz
	1 to < 2 GHz	100 MHz/ms	10 GHz
	2 to < 3.2 GHz	200 MHz/ms	20 GHz
	≥ 3.2 GHz	400 MHz/ms	20 GHz
<b>Frequency accuracy</b>	± 0.05% of span ± timebase (at 100 ms sweep time, for sweep spans less than maximum values given above) Accuracy improves proportionally as sweep time increases <sup>3</sup> (forward sweep, not including bandswitch and retrace intervals)		
<b>Sweep time</b>	1 ms		
Resolution	1 ms		
Manual mode	Settable 10 ms to 99 seconds		
Auto mode	Set to minimum value determined by maximum sweep rate and 8757D setting		
<b>Triggering</b>	Auto, external, single, or GPIB		
<b>Markers</b>	10 independent continuously variable frequency markers		
Display	Z-axis intensity or RF amplitude pulse		
Functions	M1 to center, M1/M2 to start/stop, marker delta		
<b>Two-tone (master/slave) measurements<sup>4</sup></b>	Two PSGs can synchronously track each other, with independent control of start/stop frequencies		
<b>Network analyzer compatibility</b>	Fully compatible with Agilent 8757D scalar network analyzer <sup>5</sup> Also useable with Agilent 8757A/C/E scalar network analyzers for making basic swept measurements. <sup>6</sup>		


1. During Ramp sweep operation, AM and Pulse Modulation are useable but not specified; FM, Phase Modulation, Wideband AM and I/Q modulation are not useable.
2. Minimum settable sweep span is proportional to carrier frequency and sweep time. Actual sweep span may be slightly different than desired setting for spans less than  $[0.00004\% \text{ of carrier frequency or } 140 \text{ Hz}] \times [\text{sweep time in seconds}]$ . Actual span will always be displayed correctly.
3. Typical accuracy for sweep times > 100 ms can be calculated from the equation:  

$$[(0.005\% \text{ of span}) / (\text{sweep time in seconds})] \pm \text{timebase}$$
Accuracy is not specified for sweep times < 100 ms.
4. For Master/Slave operation use Agilent Technologies part #8120-8806 Master/Slave interface cable.
5. When measuring low-pass devices in AC mode, dynamic range may be reduced up to 10dB below 3.2 GHz
6. GPIB system interface is not supported with 8757A/C/E, only with 8757D. As a result, some features of the 8757A/C/E, such as frequency display, pass-through mode, and alternate sweep, do not function with PSG signal generators.

## Output

<b>Power<sup>1</sup> (dBm)</b>	
<b>Frequency range</b>	
250 kHz to 3.2 GHz <sup>2</sup>	–130 to +13
250 kHz to 3.2 GHz (with Option 1E6) <sup>2</sup>	–130 to +10
> 3.2 to 20 GHz <sup>3</sup>	–130 to +18
<b>Step attenuator</b>	from 0 to 115 dB in 5 dB steps <sup>4</sup>

### Measured maximum available power in CW mode

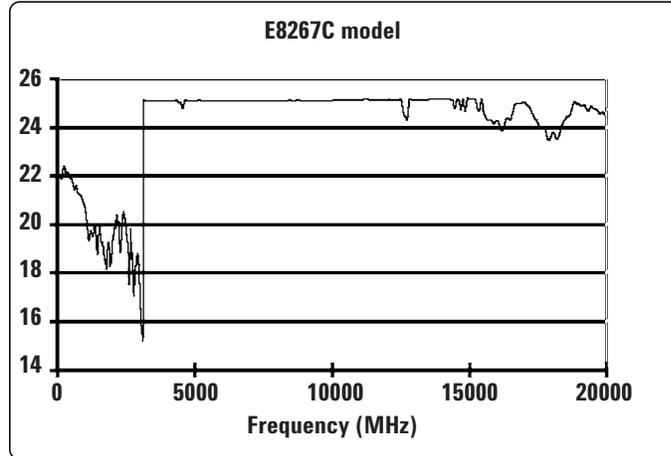

<b>Attenuator hold range</b>	(Same as max power sweep range)
<b>Minimum</b>	From –15 dBm to maximum specified output power with step attenuator in 0 dB position. Can be offset using step attenuator.

### Amplitude switching speed<sup>5</sup>

CW or analog modulation	< 5 ms (typical)
When using power search	< 25 ms (typical)

### Level accuracy<sup>6</sup> (dB)

Frequency	> +10 dBm	+10 to –10 dBm	–10 to –70 dBm	–70 to –90 dBm	–90 to –110 dBm
250 kHz to 2 GHz	±0.6	±0.6	±0.7	±0.8	±1.4
> 2 to 20 GHz	±0.8	±0.8	±0.9	±1.0	±1.7

### CW Level accuracy with I/Q modulation (With PRBS modulated data)

(relative to CW)<sup>7</sup>

#### With ALC On:


OAM or QPSK formats <sup>8</sup>	± 0.2 dB
Constant-amplitude formats (FSK, GMSK, etc)	± 0.2 dB

#### With ALC Off:<sup>9</sup>

± 0.2 dB (typical)

- Maximum power specification is warranted from 15 to 35 °C, and is typical from 0 to 15 °C. Maximum power over the 35 to 55 °C range typically degrades less than 2 dB.
- With I/Q modulation on, maximum power specification is typical. With external inputs enabled,  $\sqrt{I^2 + Q^2} > 0.2 V_{rms}$ .
- With I/Q modulation on, maximum power specification is typically +15 dBm. With external inputs enabled,  $\sqrt{I^2 + Q^2} > 0.2 V_{rms}$ .
- The step attenuator provides coarse power attenuation to achieve low power levels. Fine power level adjustment is provided by the ALC (Automatic Level Control) within the attenuator hold range.
- To within 0.1 dB of final amplitude within one attenuator range.
- Specifications apply in CW and list/step sweep modes over the 15 to 35 °C temperature range, with attenuator hold off (normal operating mode). Degradation outside this range, for ALC power levels > –5 dBm, is typically < 0.3 dB. In Ramp sweep mode (with Option 007), specifications are typical. For instruments with Type-N connectors (Option 1E6), specifications are degraded typically 0.2 dB above 18 GHz. Level accuracy is not specified below –110 dBm.
- If external inputs are used, specification applies with input level  $\sqrt{I^2 + Q^2} = 0.3 V_{rms}$  and I/Q modulator attenuation = 10 dB.
- Measured with symbol rate > 10 kHz and power ≤ 0 dBm.
- Relative to ALC on, after power search is executed. When applying external I/Q signals with ALC off, output level will vary directly with I/Q input level.

## 20 GHz level accuracy

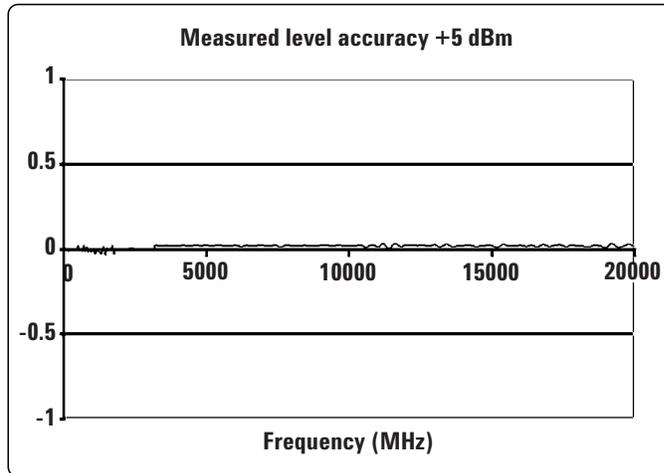


<b>Resolution</b>	0.01 dB
<b>Temperature stability</b>	0.01 dB/ °C (typical)
<b>User flatness correction</b>	
Number of points	2 to 1601 points/table
Number of tables	Up to 10,000, memory limited
Path loss	Arbitrary, within attenuator range
Entry modes	Remote power meter <sup>1</sup> , remote bus, manual (user edit/view)
<b>Output impedance</b>	50 Ω (nominal)
<b>SWR</b> (internally leveled, typical)	
250 kHz to 2 GHz	< 1.4:1
> 2 GHz to 20 GHz	< 1.6:1
<b>Leveling modes</b>	Internal leveling, external detector leveling, millimeter source module, ALC Off
<b>External detector leveling</b>	
Range	–0.2 mV to –0.5 V, (nominal) (–36 dBm to +4 dBm using Agilent 33330D/E detector)
Bandwidth	10 kHz (typical) (Note: not intended for pulsed operation)
<b>Maximum reverse power</b>	1/2 Watt (nominal)

1. Compatible with Agilent Technologies EPM Series (E4418B and E4419B) power meters.

## Spectral purity

<b>Harmonics<sup>1</sup></b>	(dBc at +10 dBm or maximum specified output power, whichever is lower)
< 1 MHz	-27 dBc (typical)
1 MHz to 2 GHz	-27 dBc
> 2 GHz to 20 GHz	-55 dBc

### 20 GHz Measured harmonics

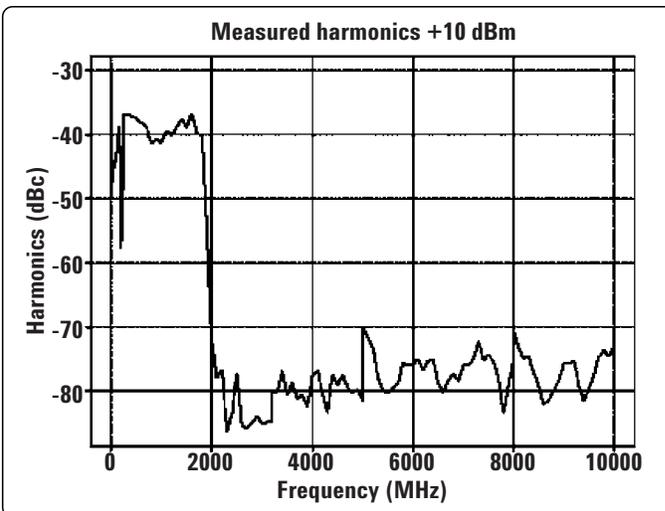

<b>Sub-harmonics<sup>2</sup></b>	(dBc at +10 dBm or maximum specified output power, whichever is lower)
250 kHz to 10 GHz	None
> 10 GHz to 20 GHz	< -60 dBc

**Non-harmonics** (dBc at +10 dBm or maximum specified output power, whichever is lower, for offsets > 3 kHz [> 300 Hz with Option UNR])<sup>3</sup>

<b>Frequency</b>	<b>Spec</b>	<b>Typical</b>
250 kHz to 250 MHz	-65	-72 for > 10 kHz offsets
> 250 MHz to 1 GHz	-80	-88
> 1 to 2 GHz	-74	-82
> 2 to 3.2 GHz	-68	-76
> 3.2 to 10 GHz	-62	-70
> 10 to 20 GHz	-56	-64

<b>SSB phase noise (CW)</b>		
<b>Frequency</b>	<b>Offset from carrier (dBc/Hz)</b>	
	<b>20 kHz</b>	<b>20 kHz (typical)</b>
250 kHz to 250 MHz	-130	-134
> 250 to 500 MHz	-134 <sup>4</sup>	-138
> 500 MHz to 1 GHz	-130	-134
> 1 to 2 GHz	-124	-128
> 2 to 3.2 GHz	-120	-124
> 3.2 to 10 GHz	-110	-113
> 10 to 20 GHz	-104	-108

- Specifications for harmonics beyond maximum instrument frequencies are typical.
- Specifications for sub-harmonics beyond maximum instrument frequencies are typical.
- Performance is typical for spurs at frequencies above the maximum operating frequency of the instrument. Specifications apply for CW mode only. Performance typically is -60 dBc between 200 and 250 MHz.
- For instruments with serial number prefixes below MY4330 or US4330, the specification is -136 dBc/Hz.

**Option UNR: Enhanced SSB phase noise (CW)**

Frequency	Offset from carrier (dBc/Hz)			
	100 Hz	1 kHz	10 kHz	100 kHz
250 kHz to 250 MHz	spec (typical) -94 (-115)	spec (typical) -110 (-123)	spec (typical) -128 (-132)	spec (typical) -130 (-133)
> 250 to 500 MHz	-100 (-110)	-124 (-130)	-132 (-136)	-136 (-141)
> 500 MHz to 1 GHz	-94 (-104)	-118 (-126)	-130 (-135)	-130 (-135)
> 1 to 2 GHz	-88 (-98)	-112 (-120)	-124 (-129)	-124 (-129)
> 2 to 3.2 GHz	-84 (-94)	-108 (-116)	-120 (-125)	-120 (-125)
> 3.2 to 10 GHz	-74 (-84)	-98 (-106)	-110 (-115)	-110 (-115)
> 10 to 20 GHz	-68 (-78)	-92 (-100)	-104 (-107)	-104 (-109)

**Residual FM**


CW mode	< N x 8 Hz (typical)
Option UNR	< N x 4 Hz (typical)
Ramp sweep mode:	< N x 1 kHz (typical)

**Broadband noise**


(CW mode at +10 dBm or maximum specified output power, whichever is lower, for offsets > 10 MHz)  
 > 2.4 to 20 GHz < -148 dBc/Hz (typical)

**Measured phase noise with E5500 and plotted without spurs**


**Standard Phase noise**

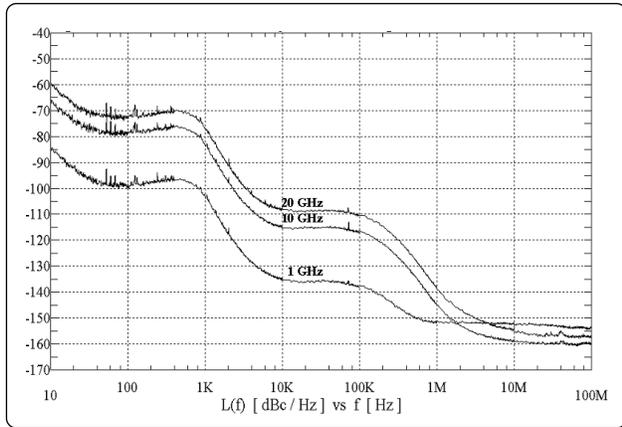


**Standard phase noise performance with I/Q modulation on<sup>1</sup>**

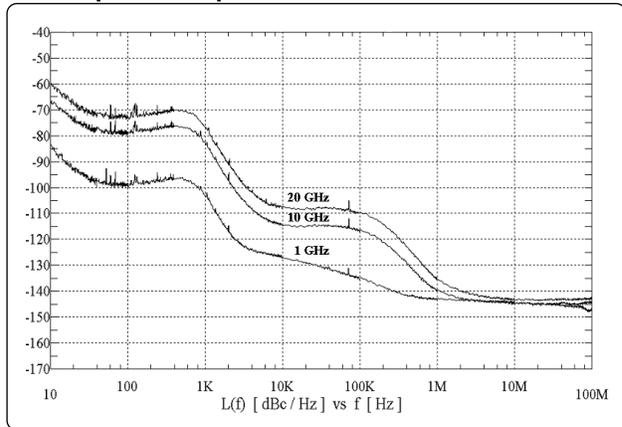

**Option UNR**

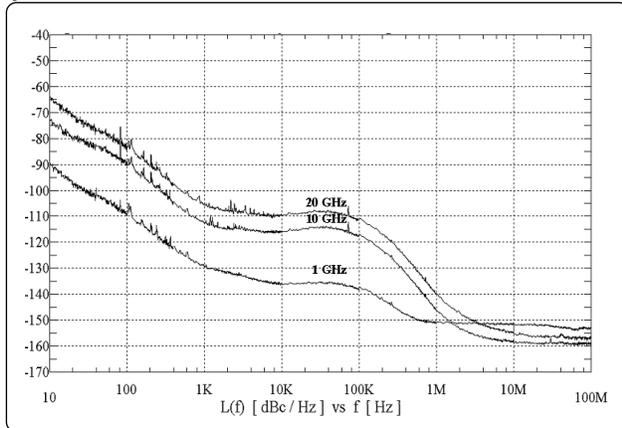


**Option UNR with I/Q modulation on<sup>1</sup>**

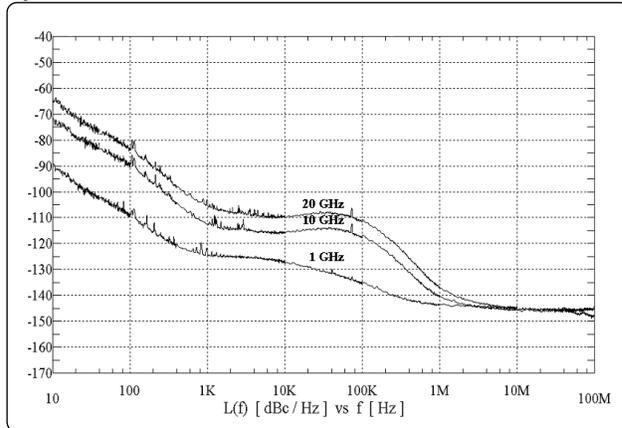


1. External I/Q input level  $\sqrt{I^2 + Q^2} = 250 \text{ mV}_{\text{rms}}$ , I/Q modulator attenuator set to auto.

Measured standard vs. Option UNR at 10 GHz

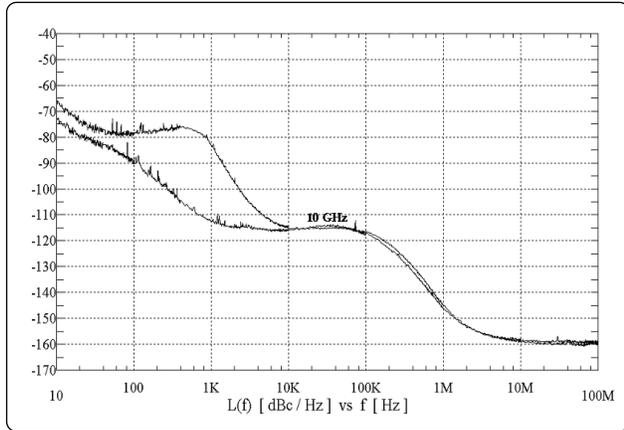

Measured AM noise at 10 GHz

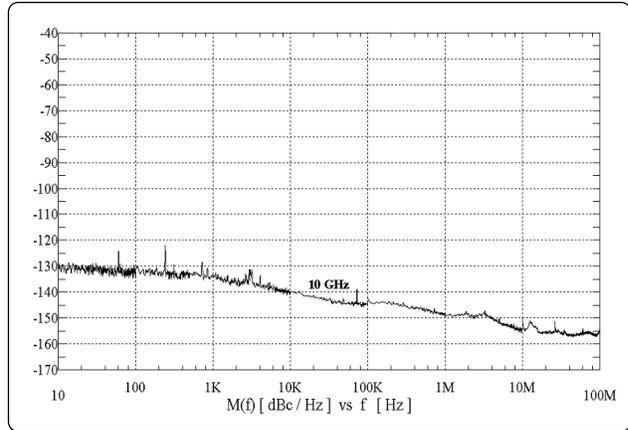

Typical rms jitter:<sup>1</sup>

Standard

Carrier frequency	SONET/SDH data rates	rms jitter bandwidth	Unit intervals (μUI)	Time (fs)
155 MHz	155 MB/s	100 Hz to 1.5 MHz	95	497
622 MHz	622 MB/s	1 kHz to 5 MHz	54	55
2.488 GHz	2488 MB/s	5 kHz to 15 MHz	64	24
9.953 GHz	9953 MB/s	20 kHz to 80 MHz	162	16

Option UNR

Carrier frequency	SONET/SDH data rates	rms jitter bandwidth	Unit intervals (μUI)	Time (fs)
155 MHz	155 MB/s	100 Hz to 1.5 MHz	85	400
622 MHz	622 MB/s	1 kHz to 5 MHz	25	39
2.488 GHz	2488 MB/s	5 kHz to 15 MHz	61	24
9.953 GHz	9953 MB/s	20 kHz to 80 MHz	158	15

1. Calculated from phase noise performance in CW mode only at +3 dBm. For other frequencies, data rate, or bandwidths, please contact your sales representative.

## Frequency modulation

<b>Maximum deviation</b>	N x 8 MHz	
<b>Resolution</b>	0.1% of deviation or 1 Hz, whichever is greater	
<b>Deviation accuracy</b>	< ± 3.5% of FM deviation + 20 Hz (1 kHz rate, deviations < N x 800 kHz)	
<b>Modulation frequency response</b>		
<b>Path</b>	<b>Rates (at 100 kHz deviation)</b>	
	<b>1 dB Bandwidth</b>	<b>3 dB Bandwidth (typical)</b>
FM 1	dc/20 Hz to 100 kHz	dc/5 Hz to 10 MHz
FM 2	dc/20 Hz to 100 kHz	dc/5 Hz to 1 MHz
<b>dc FM<sup>1</sup> carrier offset</b>	±0.1% of set deviation + (N x 8 Hz)	
<b>Distortion</b>	< 1% (1 kHz rate, deviations < N x 800 kHz)	
<b>Sensitivity</b>	±1 V <sub>peak</sub> for indicated deviation	
<b>Paths</b>	FM1 and FM2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, internal1, internal2. The FM2 path is limited to a maximum rate of 1 MHz. The FM2 path must be set to a deviation less than FM1.	

## Phase modulation

<b>Maximum deviation</b>	N x 80 radians (N x 8 radians in high-bandwidth mode)	
<b>Resolution</b>	0.1% of set deviation	
<b>Deviation accuracy</b>	< ±5% of deviation + 0.01 radians (1 kHz rate, normal BW mode)	
<b>Modulation frequency response</b>		
<b>Mode</b>	<b>Maximum Deviation</b>	<b>Rates (3 dB BW)</b>
Normal BW	N x 80 rad	dc – 100 kHz
High BW	N x 8 rad	dc – 1 MHz (typical)
<b>Distortion</b>	< 1 % (1 kHz rate, THD, dev < N x 80 rad, normal BW mode)	
<b>Sensitivity</b>	±1 V <sub>peak</sub> for indicated deviation	
<b>Paths</b>	ΦM1 and ΦM2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, internal1, internal2. The ΦM2 path must be set to a deviation less than ΦM1.	

## Amplitude modulation (f<sub>c</sub> > 2 MHz)<sup>2</sup> (typical)

<b>Depth</b>	<b>Linear mode</b>	<b>Exponential (log) mode</b> (Downward modulation only)
Maximum	> 90%	> 20 dB
Settable <sup>3</sup>	0 to 100 %	0 to 40 dB
Resolution	0.1%	0.01 dB
Accuracy (1 kHz rate)	< ±(6 % of setting + 1 %)	< ±(2% of setting + 0.2 dB)
<b>Ext sensitivity</b>	±1 V <sub>peak</sub> for indicated depth	-1 V for indicated depth
<b>Rates (3 dB bandwidth, 30% depth)</b>	dc/10 Hz to 100 kHz (typical) (useable to 1 MHz)	
<b>Distortion (1 kHz rate, linear mode, THD)</b>		
30% AM	< 1.5%	
90% AM	< 4 %	
<b>Paths</b>	AM1 and AM2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, internal1, internal2.	

1. At the calibrated deviation and carrier frequency, within 5 °C of ambient temperature at time of user calibration.
2. For f<sub>c</sub> < 2 MHz AM is usable but not specified. AM specifications apply with ALC on, and envelope peaks < maximum specified power.
3. For AM depth settings > 90% or > 20 dB, deep AM mode is recommended.

## Wideband AM

<b>Rate (typical 1 dB bandwidth)</b>	
ALC on	1 kHz to 80 MHz
ALC off	DC to 80 MHz
<b>External 1 input</b>	
Sensitivity	0.5 V = 100%
Input impedance	50 $\Omega$ (nominal)

## External modulation inputs (Ext1 & Ext2)

<b>Modulation types</b>	AM, FM, and $\Phi$ M
<b>Input impedance</b>	50 or 600 $\Omega$ (nominal), switched
<b>High/low indicator</b> (100 Hz to 10 MHz BW, ac coupled inputs only)	Activated when input level error exceeds 3% (nominal)

## Simultaneous modulation

All modulation types may be simultaneously enabled except: FM with  $\Phi$ M, linear AM with exponential AM, and Wideband AM with I/Q. AM, FM, and  $\Phi$ M can sum simultaneous inputs from any two sources (Ext1, Ext2, internal1, or internal2) Any given source (Ext1, Ext2, internal1, or internal2) may be routed to only one activated modulation type.


## Internal modulation source

Dual function generators provides two independent signals (internal1 and internal2) for use with AM, FM, $\Phi$ M, or LF Out.	
<b>Waveforms</b>	Sine, square, positive ramp, negative ramp, triangle, Gaussian noise, uniform noise, swept sine, dual sine <sup>1</sup>
<b>Rate range</b>	
Sine	0.5 Hz to 1 MHz
Square, ramp, triangle	0.5 Hz to 100 kHz
Resolution	0.5 Hz
Accuracy	Same as timebase
<b>LF out</b>	
<b>Output</b>	Internal1 or internal2. Also provides monitoring of internal1 or internal2 when used for AM, FM, or $\Phi$ M.
Amplitude	0 to 3 V <sub>peak</sub> , into 50 $\Omega$ (nominal)
Output impedance	50 $\Omega$ (nominal)
<b>Swept sine mode:</b> (frequency, phase continuous)	
Operating modes	Triggered or continuous sweeps
Frequency range	1 Hz to 1 MHz
Sweep rate	0.5 Hz to 100 kHz sweeps/s, equivalent to sweep times 10 $\mu$ s to 2 s
Resolution	0.5 Hz (0.5 sweep/s)

1. Internal2 is not available when using swept sine or dual sine modes.

## Pulse modulation<sup>1</sup>


	Standard	Standard	Option 1E6 <sup>2</sup>
	> 3.2 GHz	500 MHz to 3.2 GHz	10 MHz to 3.2 GHz
<b>On/off ratio</b>	80 dB	80 dB (typical)	80 dB
<b>Rise/fall times</b> (Tr, Tf)	10 ns (6 ns typical)	100 ns (typical)	10 ns (8 ns typical)
<b>Pulse width</b>			
Internally leveled	≥ 1 μs	≥ 2 μs (typical)	≥ 1 μs
Level hold (ALC Off with power search) <sup>3</sup>	≥ 20 ns (typical)	≥ 0.5 μs (typical)	≥ 20 ns (typical)
<b>Repetition frequency</b>			
Internally leveled	10 Hz to 500 kHz (typical)	10 Hz to 250 kHz (typical)	10 Hz to 500 kHz (typical)
Level hold (ALC Off with power search) <sup>3</sup>	dc to 10 MHz (typical)	dc to 1 MHz (typical)	dc to 10 MHz (typical)
<b>Level accuracy</b> (relative to CW)			
Internally leveled	±0.5 dB ±0.15 (typical)	± 0.5 dB	± 0.5 dB
Level hold (ALC Off with power search) <sup>3</sup>	≤ 20 GHz ±0.8 dB (typical)	±0.5 dB (typical)	± 1.2 dB (typical)
<b>Width compression</b>	±5 ns (typical)	±50 ns (typical)	±5 ns (typical)
<b>Video feed-through</b> <sup>4</sup>	< 2 mV (typical)	< 200 mV (typical)	< 125 mV (typical)
<b>Video delay</b>			
(Ext input to Video)	40 ns (nominal)	40 ns (nominal)	40 ns (nominal)
<b>RF delay</b> (Tm)			
(Video to RF output)	35 ns (nominal)	280 ns (nominal)	45 ns (nominal)
<b>Pulse overshoot</b> (Vor)	< 10% (typical)	< 10% (typical)	< 10% (typical)
<b>Input level</b>	+1 V <sub>peak</sub> = RF On	+1 V <sub>peak</sub> = RF On	+1 V <sub>peak</sub> = RF On
<b>Input impedance</b>	50 Ω, (nominal)	50 Ω, (nominal)	50 Ω, (nominal)

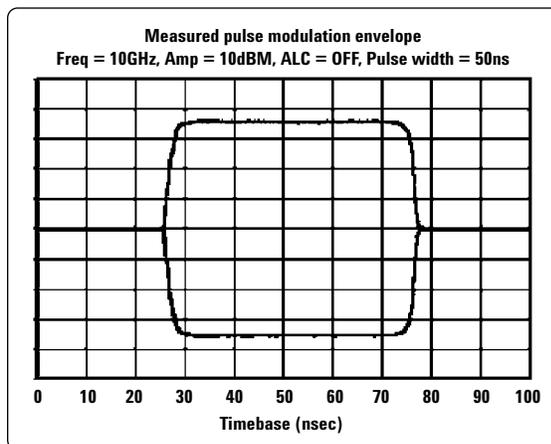

1. With ALC off, specs apply after the execution of power search. Specs apply with Atten Hold off (default mode), or ALC level between 0 and +10 dBm.
2. Option 1E6 provides narrow pulse (20 ns typical) capability between 10 MHz and 3.2 GHz. Narrow pulse capability above 3.2 GHz is standard.
3. Power search is a calibration routine that improves level accuracy in ALC-off mode. Un-pulsed RF power will be present typically up to 50 ms when executing power search.
4. With attenuator in 0 dB position. Video feed-through decreases with attenuator setting.

## Internal pulse generator

<b>Modes</b>	Free-run, triggered, triggered with delay, doublet, and gated. Triggered with delay, doublet, and gated require external trigger source.
<b>Period (PRI) (<math>T_p</math>)</b>	70 ns to 42 s (Repetition frequency: 0.024 Hz to 14.28 MHz)
<b>Pulse width (<math>T_w</math>)</b>	10 ns to 42 s
<b>Delay (<math>T_d</math>)</b>	
Free-run mode	0 to $\pm 42$ s
Triggered with delay and doublet modes	75 ns to 42 s with $\pm 10$ ns jitter
<b>Resolution</b>	10 ns (width, delay, and PRI)

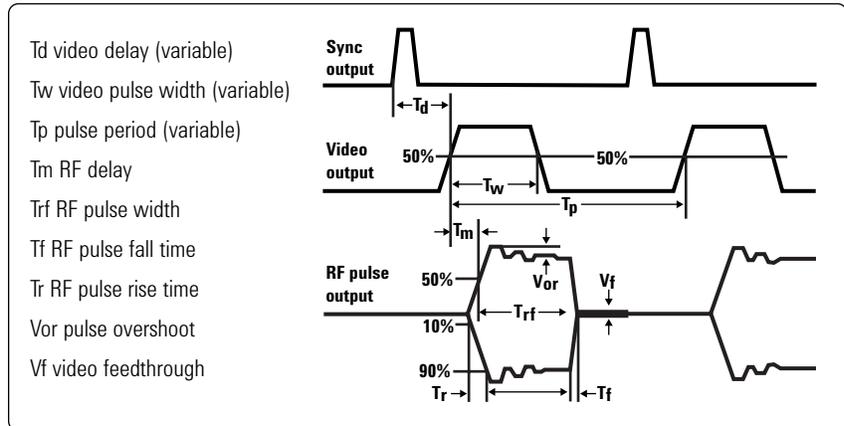

# Vector modulation

## External I/Q inputs

Input impedance

switched 50 or 600  $\Omega$  (nominal)

Input range <sup>1</sup>


Minimum 0.1  $V_{rms}$ , maximum  $1V_{peak}$

Flatness


$\pm 1$  dB within  $\pm 40$  MHz of carrier (with ALC off) (typical)

## Measured I/Q frequency response <sup>2</sup>


1.5 GHz

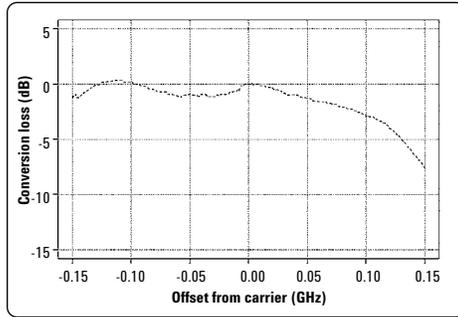


3 GHz

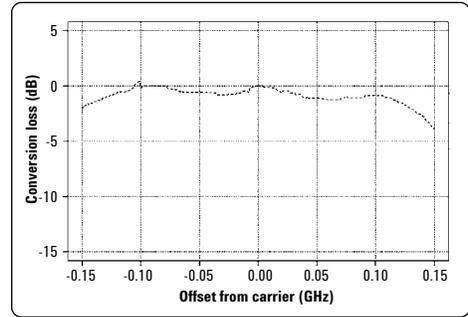

12 GHz

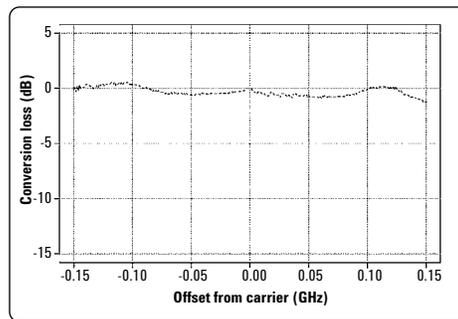

20 GHz

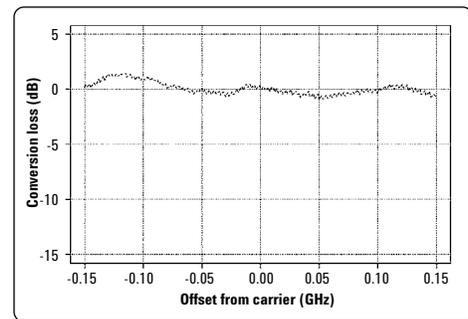

## I/Q adjustments

I & Q offsets

External inputs (600  $\Omega$ )  $\pm 5$  Volts

External inputs (50  $\Omega$ )  $\pm 50$  %

Internal baseband generator  $\pm 50$  %

I/Q attenuation

0 to 40 dB

I/Q gain balance

$\pm 4$  dB

I/Q quadrature skew

$\pm 10^\circ$  range (typical)

Low pass filter

Selectable 40 MHz or through

## I/Q baseband outputs

Differential

I, I bar, Q, Q bar

Single ended

I, Q

Frequency range

DC to 40 MHz

Output voltage into 50 W

$1.5 V_{p-p}$  (typical)

DC offset adjustments

$\pm 3$  V

DC offset resolution

1 mV

Low pass filter

Selectable 40 MHz or though

1. For optimum signal quality, the I and Q inputs should be  $0.7 V_{peak}$ , with  $\sqrt{(I^2 + Q^2)} + 150 mV_{rms}$ . Different RMS levels are accommodated by adjusting the internal I/Q modulator attenuator, which may be either manually or automatically set. The minimum input level required to maintain RF level accuracy is

$$\sqrt{(I^2 + Q^2)} = 0.1 V_{rms}$$


2. Sine wave response, measured with input level =  $100 mV_{rms}$  on one channel, and ALC off.

**I/Q baseband generator:  
arbitrary waveform mode**  
(Option 602)

<b>Channels</b>	2 [I and Q]
<b>Resolution</b>	16 bits [1/65,536]
<b>Baseband waveform memory</b>	
Length (playback)	64 megasamples (MSa)
Length (storage)	1.2 gigasamples (GSa) on 6 GB hard drive (Option 005)
<b>Waveform segments</b>	
Segment length	60 samples to 64 MSa
Maximum number of segments	8192
Minimum memory allocation	256 samples or 1 kbyte blocks
<b>Waveform sequences</b>	
Sequencing	Continuously repeating
Maximum number of sequences	16,384
Maximum segments/sequence	1 to 32,768
Maximum segment repetitions	1 to 65,536
<b>Clock</b>	
Sample rate	1 Hz to 100 MHz
Resolution	0.001 Hz
Accuracy	Same as timebase +2 <sup>42</sup> [in non-integer applications]
<b>Reconstruction filter:</b> [fixed]	50 MHz [used for all symbol rates]
<b>Baseband spectral purity</b> [full scale sinewave]	
Harmonic distortion	100 kHz to 2 MHz: < -65 dBc (typical)
Phase noise	< -127 dBc/Hz (typical) (baseband output of 10 MHz sinewave at 20 kHz offset)
IM performance	< -74 dB (typical) (two sinewaves at 950 kHz and 1050 kHz at baseband)
<b>Triggers</b>	
Types	Continuous, single, gated, segment advance
Source	Trigger key, external, remote [LAN, GPIB, RS-232]
External polarity	Negative, positive
External delay time	10 ns to 40 sec plus latency
External delay resolution	10 ns
<b>Markers</b>	
(Markers are defined in a segment during the waveform generation process, or from the PSG front panel. A marker can also be tied to the RF blanking feature of the PSG.)	
Marker polarity	Negative, positive
Number of markers	4
<b>Multicarrier</b>	
Number of carriers	Up to 100 (limited by a max bandwidth of 80 MHz depending on symbol rate and modulation type)
Frequency offset (per carrier)	-40 MHz to +40 MHz
Power offset (per carrier)	0 dB to -40 dB
<b>Modulation</b>	
PSK	BPSK, QPSK, OQPSK, $\pi/4$ DQPSK, 8PSK, 16PSK, D8PSK
OAM	4, 16, 32, 64, 256
FSK	Selectable: 2, 4, 8, 16
MSK	
Data	Random ONLY

### Measured multicarrier


4 Carriers with 64 QAM at 10 Msym/s with 20 MHz spacing

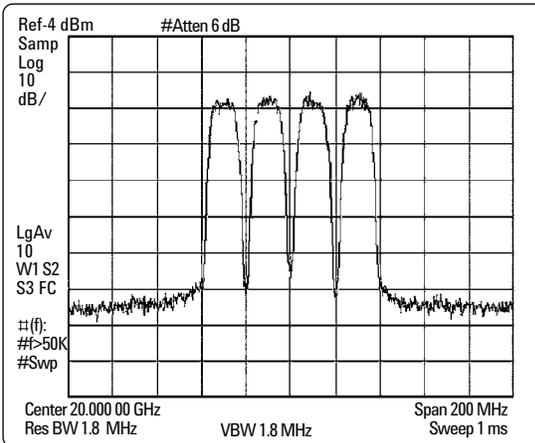


### Multitone

Number of tones	2 to 64, with selectable on/off state per tone
Frequency spacing	100 Hz to 80 MHz
Phase (per tone)	Fixed or random
Power offset (per tone)	0 to -40 dB

### Measured multitone

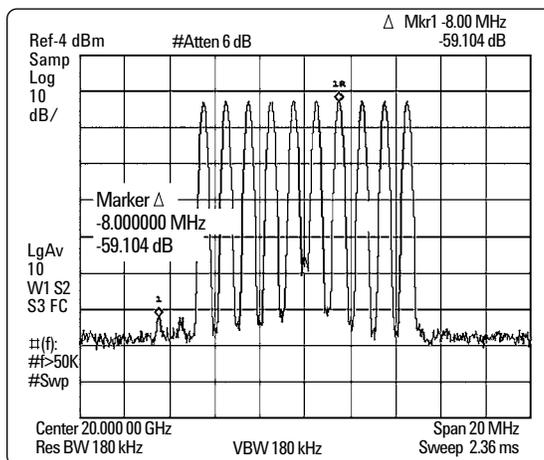


### Measured image rejection > 3.2 GHz

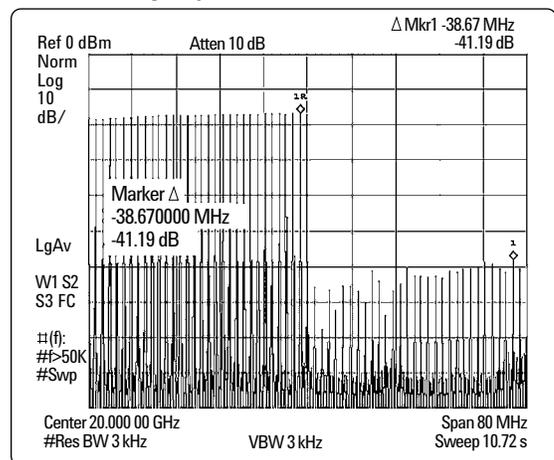

### Two-tone

Frequency spacing	100 Hz to 80 MHz (symmetrical about carrier)
IM distortion	
250 kHz to 3.2 GHz	< -45 dBc for RF levels < 0 dBm (typical)
>3.2 GHz to 20 GHz	< -55 dBc for RF levels < 0 dBm (typical)

### Measured two-tone

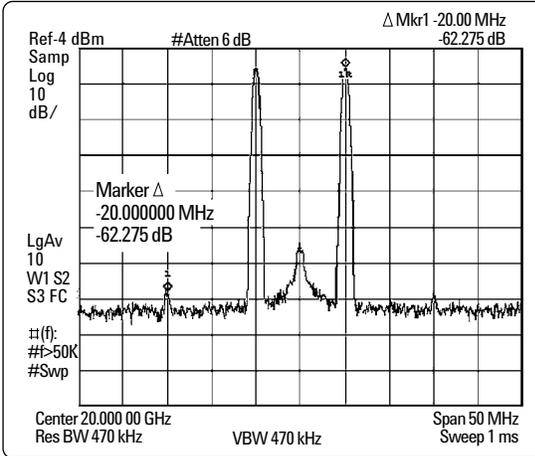

### Internal baseband generator: real-time mode (Option 602)

#### Basic modulation types (custom format)

PSK	BPSK, QPSK, OQPSK, $\pi/4$ DQPSK, 8PSK, 16PSK, D8PSK
MSK	User-defined phase offset from 0 to 100°
OAM	4, 16, 32, 64, 256
FSK	Selectable: 2, 4, 8, 16 level symmetric
User defined	Custom map of up to 16 deviation levels
Symbol rate	Maximum deviation
< 5 MHz	4 times symbol rate
5 MHz to 50 MHz	20 MHz
Resolution: 0.1 Hz	

#### I/Q

Custom map of 256 unique values

#### Vector accuracy <sup>1</sup>

Formats: BPSK, QPSK, 16-256QAM  
 $(\alpha = 0.3, \text{Root Nyquist filter, symbol rate } 4 \text{ Msym/s})$   
 < 1.2% RMS, < 0.8% RMS (typical)

#### EVM

##### Origin offset

250 kHz to 3.2 GHz

-45 dBc (typical)

3.2 to 20 GHz

-50 dBc (typical)

#### FIR filter

##### Selectable

Nyquist, root Nyquist, Gaussian, rectangular  
 $\alpha$ : 0 to 1,  $B_b T$ : 0.1 to 1

##### Custom FIR

16-bit resolution, up to 64 symbols long, automatically resampled to 1024 coefficients (max)  
 > 32 to 64 symbol filter: symbol rate  $\leq 12.5$  MHz  
 > 16 to 32 symbol filter: symbol rate  $\leq 25$  MHz  
 Internal filters switch to 16 tap when symbol rate is between 25 and 50 MHz

#### Symbol rate

##### For external serial data:

Adjustable from 1000 symbols/sec to a maximum symbol rate of 50 Mbits/sec  $\div$  #bits/symbol

##### For internally generated data:

Adjustable from 1000 symbols/sec to 50 Msymbols/sec. and a maximum of 8 bits per symbol. Modulation quality may be degraded at high symbol rates.

#### Baseband reference frequency

##### Input

Data clock can be phase locked to an external reference. ECL, CMOS, TTL compatible, 50  $\Omega$  AC coupled

1. Measured with Agilent 89441A Vector Signal Analyzer. Valid after executing I/Q calibration, and instrument is maintained within  $\pm 5$  °C of calibration temperature. RF power < 0 dBm. When external inputs are used, vector accuracy can approach internal performance after system optimization. Recommended external I/Q input level  $\sqrt{I^2 + Q^2} = 0.3 V_{rms}$ , I/Q modulator attenuator = 10 dB.

**Frame trigger delay control**

Range 0 to 1,048,575 bits  
 Resolution 1 bit

**Data types**

**Internally generated data**

Pseudo-random patterns PN9, PN11, PN15, PN20, PN23  
 Repeating sequence Any 4-bit sequence  
 Other fixed patterns

**Direct-pattern RAM [PRAM]**

Max size 32 Mb  
 (each bit uses an entire sample space)  
 Use Non-standard framing

**User file**

Max size 3.2 MB  
 Use Continuous modulation or internally generated TDMA standard



**Externally generated data**

Type Serial data  
 Inputs Data, data (bit) clock, symbol sync  
 Accepts data rates  $\pm 5\%$  of specified data rate

**Internal burst shape control**


Varies with standards and bit rates  
 Rise/fall time range Up to 30 bits  
 Rise/fall delay range 0 to 63.5 bits

**Measured EVM**

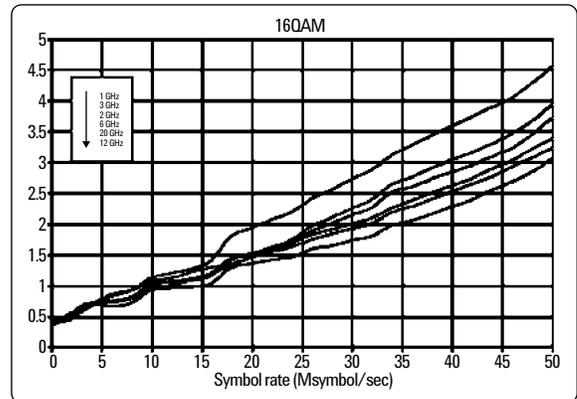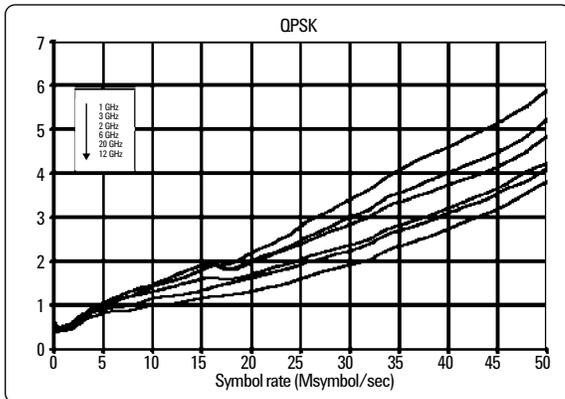

**Measured spectral re-growth**


5 GHz carrier with 16 QAM signal at 10 Msym/s

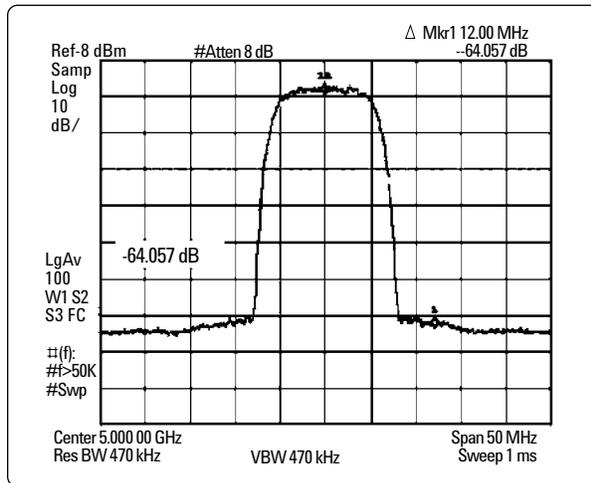


## Wideband external I/Q inputs (Option 015)

<b>RF output frequency range:</b>	<b>3.2 to 20 GHz</b>
<b>Input</b>	
Input (baseband) frequency range	DC to > 500 MHz (nominal)
Input impedance	50 $\Omega$ (nominal)
Recommended input level	0 dBm (nominal)
Maximum input voltage	$\pm 1$ volt DC
<b>I/Q offset adjustments</b>	$\pm 50\%$
<b>RF path filters<sup>1</sup></b>	
Carrier Frequency	Low-pass 3 dB cutoff frequency (nominal)
> 3.2 to 5 GHz	5.5 GHz
> 5 to 8 GHz	8.9 GHz
> 8 to 12.8 GHz	13.9 GHz
> 12.8 GHz	22.5 GHz
<b>Measured I/Q frequency response</b>	


6 GHz

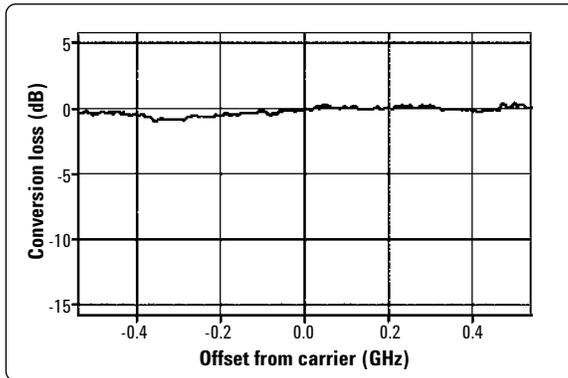


10 GHz

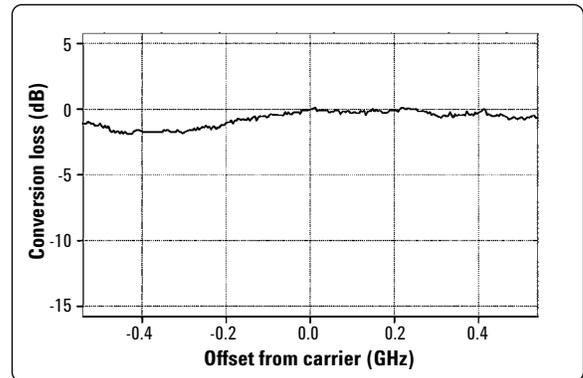

15 GHz

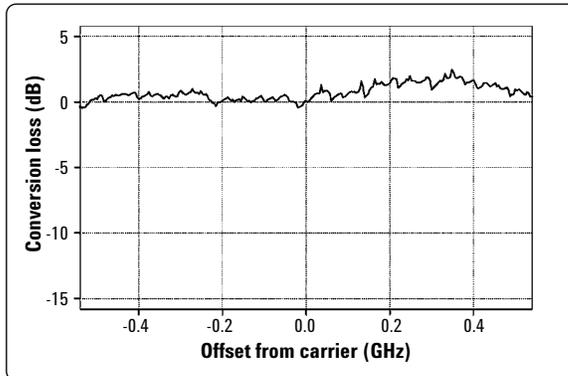

20 GHz

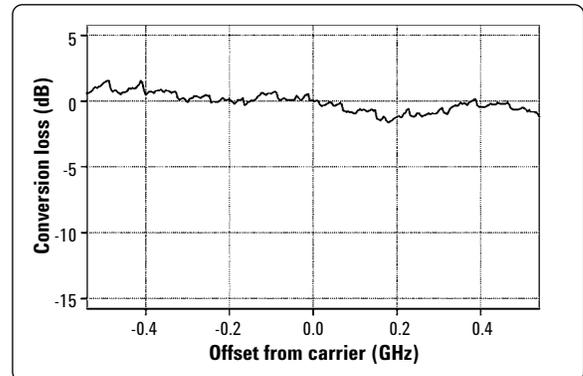

1. Operation close to RF filter cutoff frequencies will affect channel flatness.

## Remote programming

<b>Interfaces</b>	GPIO (IEEE-488.2,1987) with listen and talk, RS-232, and 10BaseT LAN interface.
<b>Control languages</b>	SCPI version 1997.0. Also will emulate most applicable Agilent 836xxB, Agilent 837xxB, and Agilent 8340/41B commands, providing general compatibility with ATE systems which include these signal generators.
<b>IEEE-488 functions</b>	SH1, AH1, T6, TE0, L4, LE0, SR1, RL1, PP0, DC1, DT0, C0, E2.
<b>ISO compliant</b>	This family of signal generators is manufactured in an ISO-9001 registered facility in concurrence with Agilent Technologies commitment to quality.

## General specifications

<b>Power requirements</b>	90 to 267 VAC 50 to 60 Hz, (automatically selected), 650 W maximum.
<b>Operating temperature range</b>	0 to 55 °C <sup>1</sup>
<b>Storage temperature range<sup>2</sup></b>	–40 to 71 °C With Option 005: –4 ° to 65 °C, gradient less than 20 °C/hour
<b>Shock and vibration</b>	
Operating random vibration	5 to 500 Hz, 0.21 g rms
Survival swept sine vibration	5 to 500 Hz, 0.75 g
Survival random vibration	5 to 500 Hz, 2.09 g rms
Functional shock (half-sine, 30 g, 11 ms) and bench drop test	Meets the requirements of MIL-PRF-28800F for class 3 equipment.
<b>EMC</b>	Meets the conducted and radiated interference and immunity requirements of IEC/EN 61326-1. Meets radiated emission requirements of CISPR Pub 11/1997 Group 1 class A.
<b>Storage registers</b>	Memory is shared by instrument states, user data files, sweep list files, and waveform sequences. Depending on the number and size of these files, up to 800 storage registers and 10 register sequences are available.
<b>Security</b>	Display blanking.
<b>Compatibility</b>	Agilent Technologies 83550 Series millimeter heads (not for use with I/Q modulation), Agilent Technologies 8757D scalar network analyzers, Agilent Technologies EPM Series power Meters.
<b>Self-test</b>	Internal diagnostic routine tests most modules (including microcircuits) in a preset condition. For each module, if its node voltages are within acceptable limits, then the module “passes” the test.
<b>Weight</b>	< 25 kg (54 lb.) net, < 33 kg (74 lb.) shipping.
<b>Dimensions</b>	178 mm H x 426 mm W x 498 mm D (7" H x 16.8" W x 19.6" D in.).
<b>Recommended calibration cycle</b>	24 months

## Input/Output Descriptions

### Front panel connectors

(All connectors are BNC female unless otherwise noted.)<sup>3</sup>

<b>RF output</b>	Nominal output impedance 50 Ω. Precision APC-3.5 male, or Type-N with Option 1ED.
<b>ALC input</b>	Used for negative external detector leveling. Nominal input impedance 120 kΩ, damage level ±15 V.
<b>LF output</b>	Outputs the internally generated LF source. Nominal output impedance 50 Ω.
<b>External input 1</b>	Drives either AM, FM, or ΦM. Nominal input impedance 50 or 600 Ω, damage levels are 5 V <sub>rms</sub> and 10 V <sub>peak</sub> .

1. Save and recall of user files and instrument states from Option 005 Hard Drive is guaranteed only over the range 0 to 40 °C.
2. Storage below –20 °C instrument states may be lost.
3. Digital inputs and output are 3.3 V CMOS unless indicated otherwise. Inputs will accept 5 V CMOS, 3V CMOS, or TTL voltage levels.

<b>External input 2</b>	Drives either AM, FM, or $\Phi$ M. Nominal input impedance 50 or 600 $\Omega$ , damage levels are 5 $V_{rms}$ and 10 $V_{peak}$ .
<b>Pulse/trigger gate input</b>	Accepts input signal for external fast pulse modulation. Also accepts external trigger pulse input for internal pulse modulation. Nominal impedance 50 $\Omega$ . Damage levels are 5 $V_{rms}$ and 10 $V_{peak}$ .
<b>Pulse video out</b>	Outputs a signal that follows the RF output in all pulse modes. TTL-level compatible, nominal source impedance 50 $\Omega$ .
<b>Pulse sync out</b>	Outputs a synchronizing pulse, nominally 50 ns width, during internal and triggered pulse modulation. TTL-level compatible, nominal source impedance 50 $\Omega$ .
<b>Data clock input</b>	Accepts a data clock signal to synchronize serial data for use with internal baseband generator (Option 602). Maximum rate 50 MHz. Damage levels are $> +5.5$ and $< -0.5$ V.
<b>Data input</b>	Accepts serial data for use with internal baseband generator (Option 602). Maximum rate 50 Mb/s. Data must be valid on the falling edges of data clock (normal mode) or the symbol sync (symbol mode). Damage levels are $> +5.5$ and $< -0.5$ V.
<b>I input</b>	Accepts an "I" input either for I/Q modulation or for wideband AM. Nominal input impedance 50 or 600 $\Omega$ . Damage levels are 1 $V_{rms}$ and 5 $V_{peak}$ .
<b>Q input</b>	Accepts a "Q" input for I/Q modulation. Nominal input impedance 50 or 600 $\Omega$ . Damage levels are 1 $V_{rms}$ and 5 $V_{peak}$ .
<b>Symbol sync input</b>	Accepts symbol sync signal for use with internal baseband generator (Option 602). Symbol sync might occur once per symbol or be a single, one bit wide pulse to synchronize the first bit of the first symbol. Maximum rate 50 MHz. Damage levels are $> +5.5$ and $< -0.5$ V.

## Rear panel connectors

(All connectors are BNC female unless otherwise noted.)<sup>1</sup>

<b>Auxiliary interface</b> (Dual mode)	Used for RS-232 serial communication and for Master/Slave source synchronization. (9-pin D-subminiature female connector) For Master/Slave operation use Agilent Technologies part #8120-8806 Master/Slave interface cable.
<b> GPIB</b>	Allows communication with compatible devices.
<b> LAN</b>	Allows 10baseT LAN communication
<b>10 MHz input</b>	Accepts an external reference (timebase) input (at 1, 2, 2.5, 5, 10 MHz for standard and 10 MHz only for Option UNR) Nominal input impedance 50 $\Omega$ . Damage levels $> +10$ dBm
<b>10 MHz output</b>	Outputs internal or external reference signal. Nominal output impedance 50 $\Omega$ . Nominal output power +4 dBm
<b>Sweep output</b> (Dual mode)	Supplies a voltage proportional to the RF power or frequency sweep ranging from 0 volts at the start of sweep to +10 volts (nominal) at the end of sweep, regardless of sweep width.  When connected to an Agilent 8757D scalar network analyzer (Option 007), generates a selectable number of equally spaced 1 us pulses (nominal) across a ramp (analog) sweep. Number of pulses can be set from 101 to 1601 by remote control from the 8757D.  Output impedance: $< 1$ $\Omega$ , can drive 2000 $\Omega$ .

1. Digital inputs and output are 3.3 V CMOS unless indicated otherwise. Inputs will accept 5 V CMOS, 3V CMOS, or TTL voltage levels.

<b>Stop sweep In/Out</b>	Open-collector, TTL-compatible input/output. In ramp sweep operation, provides low level (nominally 0 V) during sweep retrace and bandcross intervals, and high level during the forward portion of the sweep. Sweep will stop when grounded externally, sweep will resume when allowed to go high.
<b>Trigger output</b> (Dual mode)	Outputs a TTL signal. High at start of dwell, or when waiting for point trigger; low when dwell is over or point trigger is received. In ramp sweep mode, provides 1601 equally-spaced 1 $\mu$ s pulses (nominal) across a ramp sweep. When using LF out, provides 2 $\mu$ s pulse at start of LF sweep.
<b>Trigger input</b>	Accepts TTL signal for triggering point-to-point in manual sweep mode, or to trigger start of LF sweep. Damage levels $\geq +10$ V or $\leq -4$ V.
<b>Source module interface</b>	Provides bias, flatness correction, and leveling connections to the Agilent model 83550 Series mm-wave source modules.
<b>Source settled</b>	Provides an output trigger that indicates when the signal generator has settled to a new frequency or power level. High indicates source not settled, Low indicates source settled.
<b>Z-axis Blank/Markers</b>	During ramp sweep, supplies +5 V (nominal) level during retrace and bandswitch intervals. Supplies -5 V (nominal) level when the RF frequency is at a marker frequency.
<b>10 MHz EFC</b>	(Option UNR only) Accepts an external DC voltage, ranging from -5 V to +5 V, for electronic frequency control (EFC) of the internal 10 MHz reference oscillator. This voltage inversely tunes the oscillator about its center frequency approximately -0.07 ppm/V. The nominal input impedance is greater than 1 M.
<b>.25 – 3.2 GHz coherent carrier output</b>	Outputs RF signal modulated with FM or $\Phi$ M but not I/Q, AM or pulse. Nominal power 0 dBm. Frequency range from 250 MHz to 3.2 GHz. Not useful for output frequency > 3.2 GHz. Damage levels 20 Vdc and 13 dBm reverse RF power. (SMA female)
<b>Baseband generator reference input</b>	Accepts 0 to + 20 dBm sinewave, or TTL squarewave, reference input to use as reference clock for the baseband generator (Option 602). Phase locks the internal data generator to the external reference: the RF frequency is still locked to the 10 MHz reference. Rate is 250 kHz to 100 MHz 50 $\Omega$ (nominal), AC coupled.
<b>Burst gate input</b>	Accepts signal for gating burst power for use with internal baseband generator (Option 602). The burst gating is used when you are externally supplying data and clock information. The input signal must be synchronized with the external data input that will be output during the burst. The burst power envelope and modulated data are internally delayed and re-synchronized. The input signal must be CMOS high for normal burst RF power or CW RF output power and CMOS low for RF off. Damage levels are > +5.5 and < -0.5 V.
<b>Event 1 output</b>	In real-time mode, outputs a pattern or frame synchronization pulse for triggering or gating external equipment, for use with internal baseband generator (Option 602). May be set to start at the beginning of a pattern, frame, or timeslot and is adjustable to within $\pm$ one timeslot with one bit resolution. In arbitrary waveform mode, outputs a timing signal generated by marker 1.
<b>Event 2 output</b>	In real-time mode, outputs a data enable signal for gating external equipment, for use with internal baseband generator (Option 602). Applicable when external data is clocked into internally generated timeslots. Data is enabled when signal is low. In arbitrary waveform mode, outputs a timing signal generated by marker 2.

## Auxiliary I/O connector (37-pin) used with Option 602

<b>I and Q outputs</b>	Outputs the analog I/Q modulation signals from the internal baseband generator. Nominal output impedance 50 $\Omega$ , DC-coupled. Damage levels $\pm 3.5$ V.
<b><math>\bar{I}</math> and <math>\bar{Q}</math> outputs</b>	Outputs the complement of the I and Q signals for differential applications. Nominal output impedance 50 $\Omega$ , DC-coupled. Damage levels $\pm 3.5$ V.
<b>Pattern trigger input</b>	Accepts signal to trigger internal pattern or frame generator to start single pattern output, for use with internal baseband generator (Option 602). Minimum pulse width 100 ns. Damage levels are $> +5.5$ and $< -0.5$ V.
<b>Wideband I and Q inputs</b>	Direct high-bandwidth analog inputs to I/Q modulator in 3.2 to 20 GHz range. Not calibrated. 0 dBm maximum. (Option 015 only)
<b>Alternate power input</b>	Accepts CMOS signal for synchronization of external data and alternate power signal timing. Damage levels are $> +8$ and $< -4$ V.
<b>Data clock output</b>	Relays a CMOS bit clock signal for synchronizing serial data.
<b>Data output</b>	Outputs data from the internal data generator or the externally supplied signal at data input. CMOS signal.
<b>Event 3 output</b>	In arbitrary waveform mode, outputs a timing signal generated by marker 3. Damage levels $> +8$ and $< 4$ V.
<b>Event 4 output</b>	In arbitrary waveform mode, outputs a timing signal generated by marker 4. Damage levels $> +8$ and $< 4$ V.
<b>Symbol sync output</b>	Outputs CMOS symbol clock for symbol synchronization, one data clock period wide.

## Options, Accessories, and Related Products

Model/option	Description
<b>E8267C-520</b>	Frequency range 250 kHz to 20 GHz
<b>E8267C-003</b>	Enables digital output connectivity with N5102A
<b>E8267C-004</b>	Enables digital input connectivity with N5102A
<b>E8267C-UNR</b>	Enhanced close-in phase noise
<b>E8267C-1E6</b>	Narrow pulse modulation below 3.2 GHz
<b>E8267C-007</b>	Ramp (analog) sweep
<b>E8267C-602</b>	Internal baseband generator, 64 MSa memory
<b>E8267C-005</b>	6 GB internal hard drive
<b>E8267C-015</b>	Wideband external I/Q inputs
<b>E8267C-1ED</b>	Type-N (f) connector
<b>E8267C-1EM</b>	Moves all connectors to rear panel
<b>E8267C-1CM</b>	Rack mount kit
<b>E8267C-1CN</b>	Front handle kit
<b>E8267C-1CP</b>	Rack mount kit with front handle kit
<b>E8267C-408</b>	Signal Studio software for enhanced multitone signals
<b>E8267C-417</b>	Signal Studio software for 802.11 a/b/g WLAN signals
<b>E8267C-420</b>	Signal Studio software for pulse building
<b>E8267C-421</b>	Signal Studio software for noise power ratio
<b>E8267C-SP1</b>	Signal Studio for jitter injection
<b>E8267C-HEH</b>	Improve low band harmonics (from 10 MHz to 2.0 GHz)
<b>83554A</b>	Millimeter-wave source module (26.5 to 40 GHz)
<b>83555A</b>	Millimeter-wave source module (33 to 50 GHz)
<b>83556A</b>	Millimeter-wave source module (40 to 60 GHz)
<b>83557A</b>	Millimeter-wave source module (50 to 75 GHz)
<b>83558A</b>	Millimeter-wave source module (75 to 110 GHz)
<b>8120-8806</b>	Master/slave interface cable
<b>N5102A</b>	Baseband Studio digital signal interface module
<b>N5101A</b>	Baseband Studio PCI card
<b>N5110A</b>	Baseband Studio for waveform streaming
<b>N5110A-117</b>	Hard drive streaming BW to 1 MSa/s
<b>N5110A-118</b>	Extend hard drive streaming BW from 1 to 5 MSa/s
<b>N5110A-119</b>	Extend hard drive streaming BW from 5 to 10 MSa/s
<b>N5110A-120</b>	Extend hard drive streaming BW from 10 to 20 MSa/s
<b>N5110A-121</b>	Extend hard drive streaming BW from 20 MSa/s up to 40 MSa/s
<b>N5110A-125</b>	Signal generator hard drive streaming connectivity
<b>9211-2656</b>	Standard transit case
<b>9211-7481</b>	Tote-style transit case (includes wheels and telescoping handles)

## Web Resources

[www.agilent.com/find/psg](http://www.agilent.com/find/psg)  
[www.agilent.com/find/basebandstudio](http://www.agilent.com/find/basebandstudio)  
[www.agilent.com/find/signalstudio](http://www.agilent.com/find/signalstudio)

## Related Agilent Literature

*PSG Signal Generators*, Brochure  
Literature number: 5989-1324EN

*E8247C/57C PSG CW and Analog  
Signal Generator*, Data Sheet  
Literature number 5988-7454EN

*E8267C PSG Vector Signal Generator*  
Data Sheet  
Literature number 5988-6632EN

*PSG Self Guided Demo*  
Literature number 5988-2414EN

*E8267C PSG Vector Signal Generator*  
Configuration Guide  
Literature number 5988-7541EN

*Millimeter Wave Source Modules*, Product Note  
Literature number 5988-2567EN

*PSG Two-tone and Multitone Personalities*  
Application Note AN 1410  
Literature number: 5988-7689EN

*Signal Studio for Noise Power Ratio*  
Technical Overview  
Literature number 5988-9161EN

*Signal Studio for Enhanced Multitone*  
Technical Overview  
Literature number 5988-5639EN

*Signal Studio for 802.11 WLAN*, Technical Overview  
Literature number 5988-8618EN

*Baseband Studio Digital Signal Interface Module*  
Technical Overview  
Literature number 5988-9495EN

*Baseband Studio for Waveform Streaming*  
Technical Overview  
Literature number: 5988-9493EN



## Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products  
and applications you select.

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

## www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

#### United States:

(tel) 800 829 4444  
(fax) 800 829 4433

#### Canada:

(tel) 877 894 4414  
(fax) 800 746 4866

#### China:

(tel) 800 810 0189  
(fax) 800 820 2816

#### Europe:

(tel) 31 20 547 2111

#### Japan:

(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

#### Korea:

(tel) (080) 769 0800  
(fax) (080)769 0900

#### Latin America:

(tel) (305) 269 7500

#### Taiwan:

(tel) 0800 047 866  
(fax) 0800 286 331

#### Other Asia Pacific Countries:

(tel) (65) 6375 8100  
(fax) (65) 6755 0042

Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)

Contacts revised: 11/08/06

Product specifications and descriptions in this document subject to change without notice.  
© Agilent Technologies, Inc. 2002, 2003, 2005, 2007  
Printed in USA, February 8, 2007  
5988-6632EN



Agilent Technologies