


# R&S®ESU

## EMI Test Receiver

# Specifications

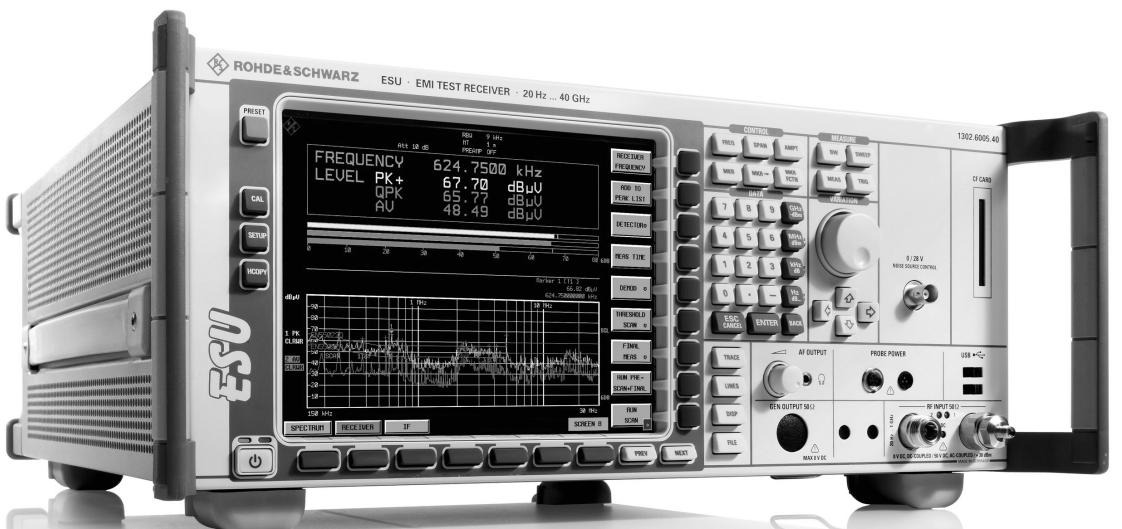

## CONTENTS

<b>BASE UNIT.....</b>	<b>3</b>
FREQUENCY.....	3
RECEIVER SCAN .....	4
SWEEP .....	4
PRESELECTION .....	4
IF AND RESOLUTION BANDWIDTHS.....	5
LEVEL.....	5
I/Q DATA.....	12
AUDIO DEMODULATION.....	12
TRIGGER FUNCTIONS .....	13
INPUTS AND OUTPUTS (FRONT PANEL).....	13
INPUTS AND OUTPUTS (REAR PANEL).....	14
GENERAL SPECIFICATIONS .....	15
<b>R&amp;S®FSU-B9 TRACKING GENERATOR, R&amp;S®FSU-B12 ATTENUATOR FOR TRACKING GENERATOR.....</b>	<b>16</b>
<b>R&amp;S®ESU-B24 LOW-NOISE PREAMPLIFIER .....</b>	<b>18</b>
<b>ORDERING INFORMATION.....</b>	<b>26</b>
OPTIONS.....	26
RECOMMENDED EXTRAS .....	27

Specifications apply under the following conditions: 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and total calibration performed. Data without tolerances: typical values only. Data designated 'nominal' applies to design parameters and is not tested.

# Base Unit


## Frequency

<b>Frequency range</b>	R&S®ESU8	
	DC coupled	20 Hz to 8 GHz
	AC coupled	1 MHz to 8 GHz
	R&S®ESU26	
	DC coupled	20 Hz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®ESU40	
	DC coupled	20 Hz to 40 GHz
	AC coupled	10 MHz to 40 GHz
	all models	
	DC coupled, input 2	20 Hz to 1 GHz
	AC coupled, input 2	9 kHz to 1 GHz
<b>Frequency resolution</b>		0.01 Hz

<b>Reference frequency, internal, nominal</b>	standard OCXO	
Aging per day	after 30 days of continuous operation	$1 \times 10^{-9}$
Aging per year	after 30 days of continuous operation	$1 \times 10^{-7}$
Temperature drift	+5°C to +45°C	$8 \times 10^{-8}$
Total error	per year	$1.8 \times 10^{-7}$
<b>Reference frequency, internal, nominal</b>	<b>option R&amp;S®FSU-B4</b>	
Aging per day	after 30 days of continuous operation	$2 \times 10^{-10}$
Aging per year	after 30 days of continuous operation	$3 \times 10^{-8}$
Temperature drift	+5°C to +45°C	$1 \times 10^{-9}$
Total error	per year	$5 \times 10^{-8}$
<b>External reference frequency</b>		1 MHz to 20 MHz, 1 Hz steps

<b>Frequency display</b>		with marker or frequency counter
Marker resolution		span/624
Maximum deviation	sweep time >3 × auto sweep time	$\pm(\text{marker frequency} \times \text{reference error} + 0.5\% \times \text{span} + 10\% \times \text{resolution bandwidth} + \frac{1}{2} \text{ (last digit)})$
Frequency counter resolution	selectable	0.1 Hz to 10 kHz
Count accuracy	S/N >25 dB	$\pm(\text{frequency} \times \text{reference error} + \frac{1}{2} \text{ (last digit)})$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		1 %

<b>Spectral purity, SSB phase noise (1 Hz)</b>	$f = 640 \text{ MHz}$	
Residual FM	RBW 10 kHz, RMS	<1 Hz nominal
Carrier offset	10 Hz	<-73 dBc, nominal
	10 Hz with option R&S®FSU-B4 fitted	<-86 dBc, nominal
	100 Hz	<-98 dBc, typ. -104 dBc
	1 kHz	<-116 dBc, typ. -124 dBc
	10 kHz	<-128 dBc, typ. -133 dBc
	100 kHz	<-128 dBc, typ. -133 dBc
	1 MHz	<-140 dBc, typ. -146 dBc
	10 MHz	typ. -160 dBc

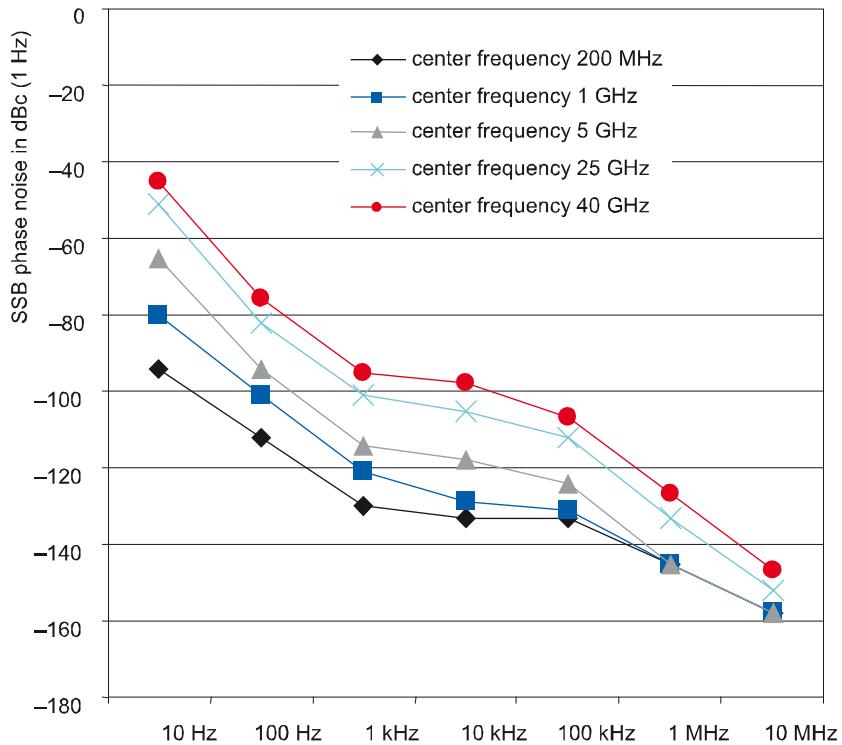

## Receiver scan

Scan	scan with max. 10 subranges with different settings
Measurement time per frequency	selectable 10 µs to 100 s

## Sweep

Sweep time	time sweep, span = 0 Hz frequency sweep, span $\geq 10$ Hz	1 µs to 16000 s in steps of 5 % 2.5 ms to 16000 s in steps of $\leq 10$ %
Max. deviation of sweep time		3 %
Measurement in time domain		with marker and cursor lines (resolution 31.25 ns)

## Preselection

Preselection	can be switched off in analyzer mode	13 preselection filters
Bandwidth (-6 dB), nominal	20 Hz to 150 kHz 150 kHz to 2 MHz 2 MHz to 8 MHz 8 MHz to 30 MHz 30 MHz to 70 MHz 70 MHz to 150 MHz 150 MHz to 300 MHz 300 MHz to 600 MHz 600 MHz to 1 GHz 1 GHz to 2 GHz 2 GHz to 3 GHz 3 GHz to 3.6 GHz 3.6 GHz to 8/26.5/40 GHz	230 kHz, fixed lowpass filter 2.6 MHz, fixed bandpass filter 2 MHz, tracking bandpass filter 6 MHz, tracking bandpass filter 15 MHz, tracking bandpass filter 30 MHz, tracking bandpass filter 60 MHz, tracking bandpass filter 80 MHz, tracking bandpass filter 100 MHz, tracking bandpass filter tracking highpass filter fixed highpass filter fixed highpass filter 60 MHz + f/500, YIG filter
Preamplifier	switchable between preselection and 1st mixer	
Range		1 kHz to 3.6 GHz
Gain		20 dB, nominal

## IF and resolution bandwidths

<b>3 dB bandwidths</b>		10 Hz to 10 MHz in 1/2/3/5 sequence
Bandwidth uncertainty	10 Hz to 100 kHz (digital)	<3 %
	200 kHz to 5 MHz (analog)	<10 %
	10 MHz	-30 % to +10 %
Shape factor 60 dB:3 dB	≤100 kHz	<6
	200 kHz to 2 MHz	<12
	3 MHz to 10 MHz	<7

<b>6 dB bandwidths</b>		10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz
Bandwidth uncertainty		3 %
Shape factor 60 dB:6 dB		<5

<b>FFT filters (analyzer mode only)</b>		
3 dB bandwidths		1 Hz to 30 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		<5 %, nominal
Shape factor 60 dB:3 dB		<3, nominal

<b>Channel filters</b>		
Bandwidths		100, 200, 300, 500 Hz, 1, 1.5, 2, 2.4, 2.7, 3, 3.4, 4, 4.5, 5, 6, 8.5, 9, 10, 12.5, 14, 15, 16, 18 (RRC), 20, 21, 24.3 (RRC), 25, 30, 50, 100, 150, 192, 200, 300, 500 kHz, 1, 1.2288, 1.28 (RRC), 1.5, 2, 3, 3.84 (RRC), 4.096 (RRC), 5 MHz
	with option R&S®ESPI-K50:	5.6 MHz (ISDB-T, Japan), 6.0 MHz (DVB-T, USA), 6.4 MHz
Shape factor 60 dB:3 dB		<2, nominal
Bandwidth uncertainty		<2 %, nominal

<b>Video bandwidths (analyzer mode only)</b>	1 Hz to 10 MHz in 1/2/3/5 sequence
--	------------------------------------

## Level

Display range	displayed noise floor to 137 dBµV
---------------	-----------------------------------

<b>Maximum input level</b>		
DC voltage	RF input, AC coupled	50 V
	RF input, DC coupled	0 V
CW RF power	RF attenuation 0 dB	127 dBµV (= 0.1 W)
	RF attenuation ≥10 dB	137 dBµV (= 1.0 W)
Pulse spectral density		97 dBµV/MHz
Max. pulse voltage	RF attenuation ≥10 dB	
	input 1	150 V
	input 2	450 V
Max. pulse energy	RF attenuation ≥10 dB, 10 µs, input 1	1 mWs
	RF attenuation ≥10 dB, 10 µs, input 2	20 mWs

<b>Intermodulation</b>		
1 dB compression of input mixer	0 dB RF attenuation, preselection/preamplifier = OFF <sup>1</sup>	
	≤3.6 GHz	+13 dBm, nominal
	>3.6 GHz	
	R&S®ESU8	+10 dBm, nominal
	R&S®ESU26/40	+7 dBm, nominal
Third-order intercept point (TOI)	level 2 × –10 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger preselection/preamplifier = OFF <sup>1</sup>	
	R&S®ESU8	
	10 MHz ≤ f <sub>in</sub> < 300 MHz	>17 dBm, typ. 20 dBm
	300 MHz ≤ f <sub>in</sub> < 3.6 GHz	>20 dBm, typ. 25 dBm
	3.6 GHz ≤ f <sub>in</sub> ≤ 8 GHz	>18 dBm, typ. 23 dBm
	R&S®ESU26, R&S®ESU40	
	10 MHz ≤ f <sub>in</sub> < 300 MHz	>17 dBm, typ. 20 dBm
	300 MHz ≤ f <sub>in</sub> < 3.6 GHz	>22 dBm, typ. 27 dBm
	3.6 GHz ≤ f <sub>in</sub> ≤ 26.5 GHz	>12 dBm, typ. 15 dBm
	R&S®ESU40	
	26.5 GHz < f <sub>in</sub> ≤ 40 GHz	>12 dBm, typ. 15 dBm
	preselection = ON, preamplifier = OFF	
	10 MHz ≤ f <sub>in</sub> < 300 MHz	>9 dBm, typ. 12 dBm
	300 MHz ≤ f <sub>in</sub> ≤ 3.6 GHz	>12 dBm, typ. 15 dBm
	preselection = ON, preamplifier = ON	
	10 MHz ≤ f <sub>in</sub> ≤ 3.6 GHz	>–10 dBm, typ. –7 dBm
Second harmonic intercept (SHI)	preselection/preamplifier = OFF <sup>1</sup>	
	f < 100 MHz	>35 dBm
	100 MHz < f <sub>in</sub> ≤ 400 MHz	>45 dBm, typ. 55 dBm
	400 MHz < f <sub>in</sub> ≤ 500 MHz	>52 dBm, typ. 60 dBm
	500 MHz < f <sub>in</sub> ≤ 1 GHz	>45 dBm, typ. 55 dBm
	1 GHz < f <sub>in</sub> ≤ 1.8 GHz	>35 dBm
	f <sub>in</sub> > 1.8 GHz	>80 dBm, nominal
	preselection = ON, preamplifier = OFF	
	f <sub>in</sub> < 100 MHz	>40 dBm
	100 MHz < f <sub>in</sub> ≤ 1.8 GHz	>55 dBm, typ. 65 dBm
	preselection = ON, preamplifier = ON	
	f <sub>in</sub> < 100 MHz	>35 dBm
	100 MHz < f <sub>in</sub> ≤ 1.8 GHz	>45 dBm, typ. 55 dBm

<b>Displayed average noise level (analyzer mode)</b>		
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, preselection = OFF, preamplifier = OFF	
	f < 10 kHz: 10 Hz FFT Filter, trace average, sweep count = 20	
	f ≥ 10 kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
	all models	
	20 Hz	<–90 dBm
	100 Hz	<–110 dBm
	1 kHz	<–120 dBm
	10 kHz	<–130 dBm
	100 kHz	<–130 dBm
	1 MHz	<–140 dBm
	10 MHz	<–153 dBm
	R&S®ESU8	
	20 MHz ≤ f < 1 GHz	<–154 dBm, typ. –158 dBm
	1 GHz ≤ f < 2 GHz	<–152 dBm, typ. –155 dBm
	2 GHz ≤ f < 3.6 GHz	<–148 dBm, typ. –151 dBm
	3.6 GHz ≤ f < 7 GHz	<–152 dBm, typ. –154 dBm
	7 GHz ≤ f ≤ 8 GHz	<–150 dBm, typ. –152 dBm

<sup>1</sup> Only available in analyzer mode.

<b>R&amp;S®ESU26</b>	
20 MHz ≤ f < 1 GHz	<-152 dBm, typ. -156 dBm
1 GHz ≤ f < 2 GHz	<-150 dBm, typ. -154 dBm
2 GHz ≤ f < 3.6 GHz	<-147 dBm, typ. -150 dBm
3.6 GHz ≤ f < 8 GHz	<-152 dBm, typ. -156 dBm
8 GHz ≤ f < 13 GHz	<-150 dBm, typ. -153 dBm
13 GHz ≤ f < 18 GHz	<-148 dBm, typ. -151 dBm
18 GHz ≤ f < 22 GHz	<-147 dBm, typ. -150 dBm
22 GHz ≤ f ≤ 26.5 GHz	<-145 dBm, typ. -148 dBm
<b>R&amp;S®ESU40</b>	
20 MHz ≤ f < 1 GHz	<-152 dBm, typ. -156 dBm
1 GHz ≤ f < 2 GHz	<-150 dBm, typ. -154 dBm
2 GHz ≤ f < 3.6 GHz	<-147 dBm, typ. -150 dBm
3.6 GHz ≤ f < 8 GHz	<-150 dBm, typ. -153 dBm
8 GHz ≤ f < 13 GHz	<-148 dBm, typ. -151 dBm
13 GHz ≤ f < 18 GHz	<-146 dBm, typ. -149 dBm
18 GHz ≤ f < 22 GHz	<-145 dBm, typ. -147 dBm
22 GHz ≤ f < 26.5 GHz	<-143 dBm, typ. -145 dBm
26.5 GHz ≤ f < 33 GHz	<-141 dBm, typ. -144 dBm
33 GHz ≤ f ≤ 40 GHz	<-138 dBm, typ. -141 dBm
RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, preselection = ON, preamplifier = OFF	
f < 10 kHz: RBW = 10 Hz, VBW = 30 Hz, trace average, sample detector, sweep count = 20, mean marker	
f ≥ 10 kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
all models	
20 Hz	typ. <-90 dBm
100 Hz	<-110 dBm
1 kHz	<-120 dBm
10 kHz	<-130 dBm
100 kHz	<-130 dBm
1 MHz	<-140 dBm
10 MHz	<-153 dBm
<b>R&amp;S®ESU8</b>	
20 MHz ≤ f < 2 GHz	<-155 dBm, typ. -158 dBm
2 GHz ≤ f < 2.5 GHz	<-153 dBm, typ. -156 dBm
2.5 GHz ≤ f < 3 GHz	<-150 dBm, typ. -153 dBm
3 GHz ≤ f ≤ 3.6 GHz	<-145 dBm, typ. -148 dBm
<b>R&amp;S®ESU26/40</b>	
20 MHz ≤ f < 1 GHz	<-155 dBm, typ. -158 dBm
1 GHz ≤ f < 2 GHz	<-153 dBm, typ. -156 dBm
2 GHz ≤ f < 2.5 GHz	<-151 dBm, typ. -154 dBm
2.5 GHz ≤ f < 3 GHz	<-147 dBm, typ. -151 dBm
3 GHz ≤ f ≤ 3.6 GHz	<-142 dBm, typ. -146 dBm

	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, preselection = ON, preamplifier = ON f < 10 kHz: RBW = 10 Hz, VBW = 30 Hz, trace average, sample detector, sweep count = 20, mean marker f ≥ 10 kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
	all models	
1 kHz	<-130 dBm	
10 kHz	<-140 dBm	
100 kHz	<-140 dBm	
1 MHz	<-150 dBm	
10 MHz	<-165 dBm	
R&S®ESU8		
20 MHz ≤ f < 500 MHz	<-165 dBm, typ. -168 dBm	
500 MHz ≤ f < 2 GHz	<-163 dBm, typ. -166 dBm	
2 GHz ≤ f < 3 GHz	<-161 dBm, typ. -164 dBm	
3 GHz ≤ f ≤ 3.6 GHz	<-157 dBm, typ. -160 dBm	
R&S®ESU26/40		
20 MHz ≤ f < 500 MHz	<-163 dBm, typ. -166 dBm	
500 MHz ≤ f < 2 GHz	<-161 dBm, typ. -164 dBm	
2 GHz ≤ f < 3 GHz	<-160 dBm, typ. -163 dBm	
3 GHz ≤ f ≤ 3.6 GHz	<-155 dBm, typ. -158 dBm	

**Noise indication (receiver mode)**

Nominal, calculated from DANL data

	RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, preamplifier = OFF all models	
20 Hz, BW = 10 Hz	<27 dBµV	
100 Hz, BW = 10 Hz	<7 dBµV	
1 kHz, BW = 100 Hz	<7 dBµV	
10 kHz, BW = 200 Hz	<0 dBµV	
100 kHz, BW = 200 Hz	<0 dBµV	
1 MHz, BW = 9 kHz	<7 dBµV	
10 MHz, BW = 9 kHz	<-6 dBµV	
R&S®ESU8		
20 MHz ≤ f < 30 MHz, BW = 9 kHz	<-8 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	<3 dBµV	
1 GHz ≤ f < 2 GHz, BW = 1 MHz	<12 dBµV	
2 GHz ≤ f < 2.5 GHz, BW = 1 MHz	<14 dBµV	
2.5 GHz ≤ f < 3 GHz, BW = 1 MHz	<17 dBµV	
3 GHz ≤ f < 3.6 GHz, BW = 1 MHz	<22 dBµV	
3.6 GHz ≤ f < 7 GHz, BW = 1 MHz	<15 dBµV	
7 GHz ≤ f ≤ 8 GHz, BW = 1 MHz	<17 dBµV	
R&S®ESU26		
20 MHz ≤ f < 30 MHz, BW = 9 kHz	<-8 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	<3 dBµV	
1 GHz ≤ f < 2 GHz, BW = 1 MHz	<12 dBµV	
2 GHz ≤ f < 2.5 GHz, BW = 1 MHz	<16 dBµV	
2.5 GHz ≤ f < 3 GHz, BW = 1 MHz	<20 dBµV	
3 GHz ≤ f < 3.6 GHz, BW = 1 MHz	<25 dBµV	
3.6 GHz ≤ f < 8 GHz, BW = 1 MHz	<15 dBµV	
8 GHz ≤ f < 13 GHz, BW = 1 MHz	<17 dBµV	
13 GHz ≤ f < 18 GHz, BW = 1 MHz	<19 dBµV	
18 GHz ≤ f < 22 GHz, BW = 1 MHz	<20 dBµV	
22 GHz ≤ f < 26.5 GHz, BW = 1 MHz	<22 dBµV	
R&S®ESU40		
20 MHz ≤ f < 30 MHz, BW = 9 kHz	<-8 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	<3 dBµV	
1 GHz ≤ f < 2 GHz, BW = 1 MHz	<12 dBµV	
2 GHz ≤ f < 2.5 GHz, BW = 1 MHz	<16 dBµV	
2.5 GHz ≤ f < 3 GHz, BW = 1 MHz	<20 dBµV	
3 GHz ≤ f < 3.6 GHz, BW = 1 MHz	<25 dBµV	
3.6 GHz ≤ f < 8 GHz, BW = 1 MHz	<17 dBµV	
8 GHz ≤ f < 13 GHz, BW = 1 MHz	<19 dBµV	
13 GHz ≤ f < 18 GHz, BW = 1 MHz	<21 dBµV	
18 GHz ≤ f < 22 GHz, BW = 1 MHz	<22 dBµV	
22 GHz ≤ f < 26.5 GHz, BW = 1 MHz	<24 dBµV	
26.5 GHz ≤ f < 33 GHz, BW = 1 MHz	<26 dBµV	
33 GHz ≤ f ≤ 40 GHz, BW = 1 MHz	<29 dBµV	
	RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, preamplifier = ON all models	
1 kHz, BW = 100 Hz	<-3 dBµV	
10 kHz, BW = 200 Hz	<-10 dBµV	
100 kHz, BW = 200 Hz	<-10 dBµV	
1 MHz, BW = 9 kHz	<-3 dBµV	
10 MHz, BW = 9 kHz	<-18 dBµV	
R&S®ESU8		
20 MHz ≤ f < 30 MHz, BW = 9 kHz	<-18 dBµV	
30 MHz ≤ f < 500 MHz, BW = 120 kHz	<-7 dBµV	
500 MHz ≤ f < 1 GHz, BW = 120 kHz	<-5 dBµV	
1 GHz ≤ f < 2 GHz, BW = 1 MHz	<4 dBµV	
2 GHz ≤ f < 3 GHz, BW = 1 MHz	<6 dBµV	
3 GHz ≤ f ≤ 3.6 GHz, BW = 1 MHz	<10 dBµV	

R&S®ESU26/40		
20 MHz $\leq f <$ 30 MHz, BW = 9 kHz	<-16 dB $\mu$ V	
30 MHz $\leq f <$ 500 MHz, BW = 120 kHz	<-5 dB $\mu$ V	
500 MHz $\leq f <$ 1 GHz, BW = 120 kHz	<-3 dB $\mu$ V	
1 GHz $\leq f <$ 2 GHz, BW = 1 MHz	<6 dB $\mu$ V	
2 GHz $\leq f <$ 3 GHz, BW = 1 MHz	<7 dB $\mu$ V	
3 GHz $\leq f \leq$ 3.6 GHz, BW = 1 MHz	<11 dB $\mu$ V	
Increase of DANL relative to AV display		
max peak	typ. +11 dB	
RMS	typ. +1 dB	
quasi peak		
band A	typ. +3 dB	
band B	typ. +4 dB	
bands C and D	typ. +6 dB	

<b>Immunity to interference</b>		
Image frequency	$f \leq 3.6$ GHz	>90 dB suppression, typ. >110 dB
	$f > 3.6$ GHz	>70 dB suppression, typ. >100 dB
	$f$ = receive frequency	
Intermediate frequency	$f \leq 3.6$ GHz	>90 dB suppression, typ. >110 dB
	3.6 GHz $< f \leq 4.2$ GHz	typ. 70 dB suppression
	$f > 4.2$ GHz	>70 dB suppression, typ. >90 dB
	$f$ = receive frequency	
Spurious response	$f > 1$ MHz, without input signal, RF attenuation = 0 dB, termination = 50 $\Omega$	<-103 dBm
Other interfering signals	$\Delta f > 100$ kHz	
	mixer level <-10 dBm, $f_{in} \leq 2.3$ GHz	<-80 dBc
	mixer level <-35 dBm, 2.3 GHz $< f_{in} < 4$ GHz	<-70 dBc
	mixer level <-10 dBm	
	4 GHz $\leq f <$ 8 GHz	<-70 dBc
	8 GHz $\leq f <$ 16 GHz	<-64 dBc
	16 GHz $\leq f <$ 26 GHz	<-58 dBc
	26.5 GHz $\leq f <$ 40 GHz	<-52 dBc
	$f$ = receive frequency	

<b>Level display (analyzer mode)</b>		
Screen		625 $\times$ 500 pixels (one diagram), max. 2 diagrams with independent settings
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces	1 measurement diagram	3
	2 measurement diagrams	6
Trace detector		max peak, min peak, auto peak (normal), sample, RMS, average, quasi peak, CISPR-AV, CISPR-RMS
Number of measurement points	default value	625
	range	155 to 30001 in steps of about a factor of 2
Trace functions		clear/write, max hold, min hold, average
Trace update rate	local measurement, display update rate, 625 points, zero span	80 per second
	remote measurement, display off: zero span/sweep time 1 ms	70 per second
	span = 10 MHz, sweep time 2.5 ms	50 per second
Setting range of reference level	logarithmic level display	-130 dBm to (+5 dBm + RF attenuation), max. 30 dBm, in steps of 0.1 dB
	linear level display	7.0 nV to 7.07 V in steps of 1 %
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

<b>Level display (receiver mode)</b>		
Screen		625 x 500 pixels, max. 2 diagrams
Level display	analog	numeric; 0.01 dB resolution
	digital	bargraph display, separately for each detector
Detectors	max. 3 selectable	max peak, min peak, RMS, average, CISPR-AV, CISPR-RMS, quasi peak
Measurement time	selectable	5 µs to 100 s
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW, dBpT
RF spectrum		
Logarithmic level axis		10 dB to 200 dB, in steps of 10
Frequency axis	selectable	linear or logarithmic
Number of traces		3
IF spectrum		
Span	selectable	1 kHz to 10 MHz, depending on RBW
Resolution bandwidth	selectable	10 Hz to 100 kHz
Detector		sample
Logarithmic level axis		80 dB to 120 dB, depending on RBW, selectable 10 dB to 200 dB
Frequency axis		linear
Number of traces		3

<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level -30 dBm, reference level -30 dBm, RF attenuation 10 dB	
	preselection = OFF, preamplifier = OFF <sup>2</sup>	<0.2 dB ( $\sigma = 0.07$ dB)
	preselection/preamplifier = ON	<0.3 dB ( $\sigma = 0.1$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation ≥10 dB, preselection= OFF, preamplifier = OFF <sup>2</sup>	
	+20 °C to +30 °C	
	20 Hz to 10 MHz	<0.5 dB ( $\sigma = 0.16$ dB)
	10 MHz ≤ f < 2 GHz	<0.3 dB ( $\sigma = 0.1$ dB)
	2 GHz ≤ f < 3.6 GHz	<0.5 dB ( $\sigma = 0.16$ dB)
	3.6 GHz ≤ f < 8 GHz, span < 1 GHz	<1.5 dB ( $\sigma = 0.5$ dB)
	8 GHz ≤ f ≤ 40 GHz, span < 1 GHz	<2 dB ( $\sigma = 0.7$ dB)
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values
	+5 °C to +45 °C	
	20 Hz ≤ f < 3.6 GHz	<0.6 dB ( $\sigma = 0.2$ dB)
	3.6 GHz ≤ f < 26.5 GHz	add 0.5 dB to above values
	f ≥ 26.5 GHz	add 1.0 dB to above values
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥10 dB, preselection/preamplifier = ON	
	+20 °C to +30 °C	
	20 Hz to 10 MHz	<0.8 dB ( $\sigma = 0.26$ dB)
	10 MHz ≤ f < 2 GHz	<0.6 dB ( $\sigma = 0.2$ dB)
	2 GHz ≤ f ≤ 3.6 GHz	<0.8 dB ( $\sigma = 0.26$ dB)
	+5 °C to +45 °C	
	20 Hz ≤ f ≤ 3.6 GHz	<0.9 dB ( $\sigma = 0.26$ dB)
Attenuator switching uncertainty	f = 128 MHz	<0.2 dB ( $\sigma = 0.07$ dB)
	0 dB to 70 dB, referenced to 10 dB attenuation	
Uncertainty of reference level setting	RF attenuation 10 dB, referenced to -10 dBm reference level setting	<0.15 dB ( $\sigma = 0.05$ dB)
Quasi-peak display		in line with CISPR 16-1-1 <sup>3</sup>

<sup>2</sup> Only available in analyzer mode.<sup>3</sup> Pulse repetition frequency (PRF) ≥ 1 Hz for measurements with time domain scan (R&S®ESU-K53) in frequency range 30 MHz to 300 MHz.



## Trigger functions

<b>Trigger</b>		
Trigger source	analyzer mode	free run, video, external, IF level (mixer level 10 dBm to –50 dBm)
	receiver mode	free run, video, external
Trigger offset	analyzer mode, span $\geq$ 10 Hz	125 ns to 100 s, resolution min. 125 ns (or 1 % of offset)
	analyzer mode, span = 0 Hz	$\pm$ (125 ns to 100 s), resolution min. 125 ns, depending on sweep time
Max. deviation of trigger offset	analyzer mode	$\pm$ (31.25 ns + (0.1 % $\times$ trigger offset))
<b>Gated sweep (analyzer mode)</b>		
Gate source		external, IF level, video
Gate delay		1 $\mu$ s to 100 s
Gate length		125 ns to 100 s, resolution min. 125 ns or 1 % of gate length
Max. deviation of gate length		$\pm$ (31.25 ns + (0.05 % $\times$ gate length))

## Inputs and outputs (front panel)

<b>RF input</b>		
Impedance		50 $\Omega$
Connector	input 1	
	R&S®ESU8	N female
	R&S®ESU26	test port adapter APC 3.5 mm/N female
	R&S®ESU40	test port adapter 2.92 mm (K)/N female
	input 2	N female
VSWR	RF attenuation $\geq$ 10 dB, DC coupled	
	f $\leq$ 1 GHz	<1.2
	1 GHz < f < 3.6 GHz	<1.5
	R&S®ESU8	
	3.6 GHz $\leq$ f $\leq$ 8 GHz	<2
	R&S®ESU26/40	
	3.6 GHz $\leq$ f < 18 GHz	<1.8
	18 GHz $\leq$ f < 26.5 GHz	<2.0
	26.5 GHz $\leq$ f $\leq$ 40 GHz	<2.5
	RF attenuation <10 dB, DC coupled, +5 °C to +30 °C	
RF attenuation	f $\leq$ 1 GHz	<2.0
	f > 1 GHz	<3.0
	RF attenuation $\geq$ 10 dB, AC coupled	
	input 1	
		20 MHz $\leq$ f $\leq$ 1 GHz
		1 GHz < f < 18 GHz
		18 GHz $\leq$ f < 26.5 GHz
	input 2	26.5 GHz $\leq$ f $\leq$ 40 GHz
		100 kHz $\leq$ f $\leq$ 1 GHz
		<1.2
Setting range of attenuator		0 dB to 75 dB, in steps of 5 dB

<b>Probe power supply</b>		
Supply voltages		+15 V DC, –12.6 V DC and ground, max. 150 mA, nominal

<b>Power supply for antennas etc</b>		
Supply voltages		$\pm$ 10 V and ground, max. 100 mA, nominal



## General specifications

<b>Display</b>	21 cm LC TFT color display (8.4")
Resolution	800 × 600 pixels (SVGA resolution)
Pixel failure rate	<1 × 10 <sup>-5</sup>

<b>Mass memory</b>		
Mass memory	hard disk	
option R&S®ESU-B18	hard disk replaced by a flash disk	
Data storage	>500 instrument settings and traces	

<b>Temperature</b>	operating temperature range	+5° C to +40 °C
	permissible temperature range	+0° C to +50 °C
	storage temperature range	-40°C to +70 °C
Climatic loading		+40 °C at 95 % relative humidity (in line with EN 60068-2-30: 2000-02)

<b>Mechanical resistance</b>	sinusoidal vibration	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6: 1996-05, EN 60068-2-30: 2000-02, EN 61010-1, MIL-T-28800D, class 5
	random vibration	10 Hz to 100 Hz, acceleration 1 g (RMS)
	shock	40 g shock spectrum, in line with MIL-STD-810C and MIL-T-28800D, classes 3 and 5
Recommended calibration interval	operation with external reference	2 years
	operation with internal reference	1 year
RFI suppression		Complies with European EMC Directive 89/336/EEC and new EMC Directive 2004/108/EC including: IEC/EN 61326 Class B (Emission) CISPR 11/EN 55011/Group 1 Class B (Emission) IEC/EN 61326 Table A.1 (Immunity, Industrial)

<b>Power supply</b>		
AC supply		100 V to 240 V, 50 Hz to 400 Hz
Rated power consumption		3.1 A to 1.3 A or 500 VA
Power consumption	R&S®ESU8	typ. 130 VA
	R&S®ESU26/40	typ. 150 VA
Safety		in line with EN 61010-1, UL 61010-1, CSA C22.2 No. 61010-1, IEC 61010-1
Test mark		VDE, GS, CSA, CSA-NRTL
Dimensions	W × H × D	435 mm × 192 mm × 460 mm (17,13 in × 7,56 in × 18,11 in)
Weight net, w/o options, nominal	R&S®ESU8	15.6 kg (34.4 lb)
	R&S®ESU26	16.7 kg (36.8 lb)
	R&S®ESU40	17.0 kg (37.5 lb)

## R&S®FSU-B9 Tracking Generator, R&S®FSU-B12 Attenuator for Tracking Generator

Unless specified otherwise, specifications not valid for frequency range from  $-3 \times \text{RBW}$  to  $+3 \times \text{RBW}$ , however at least not valid from  $-100 \text{ kHz}$  to  $+100 \text{ kHz}$ . Maximum output level  $+5 \text{ dBm}$  (peak modulation in the case of amplitude-modulated signals).

<b>Frequency</b>	
Frequency range	100 kHz to 3.6 GHz
Resolution	1 Hz
<b>Frequency offset</b>	
Setting range	$\pm 200 \text{ MHz}$
Resolution	1 Hz

<b>Spectral purity</b>	
SSB phase noise	$f = 500 \text{ MHz}$ , carrier offset 10 kHz
	normal mode typ. $-120 \text{ dBc}$ (1 Hz)
	with frequency offset typ. $-110 \text{ dBc}$ (1 Hz)
	with FM modulation on typ. $-110 \text{ dBc}$ (1 Hz)

<b>Level</b>	
Level setting range	$-30 \text{ dBm}$ to $+5 \text{ dBm}$ in steps of $0.1 \text{ dB}$ with option R&S®FSU-B12 $-100 \text{ dBm}$ to $+5 \text{ dBm}$ in steps of $0.1 \text{ dB}$

<b>Max. deviation of output level</b>		
Absolute	$f = 128 \text{ MHz}$ , output level $-20 \text{ dBm}$ to $0 \text{ dBm}$	<1 dB ( $\sigma = 0.34 \text{ dB}$ )
Frequency response	referenced to level at $128 \text{ MHz}$ , sweep time $>100 \text{ ms}$ , $+5 \text{ }^\circ\text{C}$ to $+45 \text{ }^\circ\text{C}$ output level $-20 \text{ dBm}$ to $0 \text{ dBm}$ , $100 \text{ kHz}$ to $3.6 \text{ GHz}$	<3 dB, typ. $1.9 \text{ dB}$
	output level $-30 \text{ dBm}$ to $-20 \text{ dBm}$ , $f = 100 \text{ kHz}$ to $3.6 \text{ GHz}$	3 dB
	additional deviation with R&S®FSU-B12, $100 \text{ kHz}$ to $3.6 \text{ GHz}$	<1 dB

<b>Dynamic range</b>		
Attenuation measurement range	$\text{RBW} = 1 \text{ kHz}$ , $f > 10 \text{ MHz}$	100 dB
Harmonics	output level $-10 \text{ dBm}$	typ. $-30 \text{ dBc}$
Spurious, nonharmonics	output level $0 \text{ dBm}$	typ. $-30 \text{ dBc}$

<b>Modulation</b>		
Modulation format	external	I/Q, AM, FM
Input voltage	full scale	
	AM, FM, V pp	1 V
	I/Q	$\sqrt{U_i^2 + U_q^2} = 0.5 \text{ V}$
<b>AM</b>	$f_{\text{center}} > f_{\text{mod}}$ , span = 0 Hz	
Modulation depth		0 % to 99 %
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB
<b>FM</b>	$f_{\text{center}} > f_{\text{mod}}$ , span = 0 Hz	
Frequency deviation		full range: 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz
Modulation frequency range	deviation $\leq$ 10 MHz	0 Hz to 1 kHz
	deviation $\leq$ 1 MHz	0 Hz to 100 kHz
Modulation frequency response	0 kHz to 100 kHz	1 dB
<b>I/Q modulation</b>	$f_{\text{center}} > f_{\text{mod}}$ , span = 0 Hz	
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB
<b>Modulation deviation of tracking generator</b>	I/Q modulation, typical values, baseband signals generated by the R&S®AMIQ	
EVM	NADC/TETRA/PDC	
	RMS	2 %
	peak	4 %
	PHS	
	RMS	2 %
	peak	5 %
Phase error	GSM/DCS1800/PCS1900	
	RMS	1.5°
Rho factor	peak	5°
	IS-95 CDMA	0.997

<b>Inputs and outputs (front panel)</b>		
RF output		N female, 50 Ω
VSWR	100 kHz $\leq$ f $<$ 2 GHz 2 GHz $\leq$ f $\leq$ 3.6 GHz	1.2 1.5

<b>Inputs and outputs (rear panel)</b>		
TG I/AM IN		BNC female
Impedance		50 Ω
Input voltage	V <sub>pp</sub>	1 V
TG Q/FM IN		BNC female
Impedance		50 Ω
Input voltage	V <sub>pp</sub>	1 V

## R&S®ESU-B24 Low-Noise Preamplifier

<b>Frequency range</b>	R&S®ESU8	100 kHz to 8 GHz
	R&S®ESU26	100 kHz to 26.5 GHz
	R&S®ESU40	100 kHz to 40 GHz
<b>Nominal gain</b>		30 dB
<b>Displayed average noise level (DANL) (analyzer mode)</b>		RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, preselection = OFF, preamplifier = OFF, low-noise preamplifier = OFF f < 10 kHz: 10 Hz FFT Filter, trace average, sweep count = 20, f ≥ 10 kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker all models
	20 Hz	<-90 dBm
	100 Hz	<-110 dBm
	1 kHz	<-120 dBm
	10 kHz	<-130 dBm
	100 kHz	<-130 dBm
	1 MHz	<-140 dBm
	10 MHz	<-153 dBm
	<b>R&amp;S®ESU8:</b>	
	20 MHz ≤ f < 1 GHz	<-154 dBm, typ. -158 dBm
	1 GHz ≤ f < 2 GHz	<-151 dBm, typ. -155 dBm
	2 GHz ≤ f < 3 GHz	<-146 dBm, typ. -149 dBm
	3 GHz ≤ f < 3.6 GHz	<-145 dBm, typ. -148 dBm
	3.6 GHz ≤ f < 5 GHz	<-148 dBm, typ. -151 dBm
	5 GHz ≤ f < 6 GHz	<-147 dBm, typ. -150 dBm
	6 GHz ≤ f ≤ 8 GHz	<-144 dBm, typ. -147 dBm
	<b>R&amp;S®ESU26:</b>	
	20 MHz ≤ f < 1 GHz	<-152 dBm, typ. -156 dBm
	1 GHz ≤ f < 2 GHz	<-150 dBm, typ. -154 dBm
	2 GHz ≤ f < 3.6 GHz	<-145 dBm, typ. -148 dBm
	3.6 GHz ≤ f < 10 GHz	<-147 dBm, typ. -150 dBm
	10 GHz ≤ f < 18 GHz	<-145 dBm, typ. -149 dBm
	18 GHz ≤ f < 22 GHz	<-142 dBm, typ. -145 dBm
	22 GHz ≤ f ≤ 26.5 GHz	<-140 dBm, typ. -143 dBm
	<b>R&amp;S®ESU40:</b>	
	20 MHz ≤ f < 1 GHz	<-152 dBm, typ. -156 dBm
	1 GHz ≤ f < 2 GHz	<-150 dBm, typ. -154 dBm
	2 GHz ≤ f < 3.6 GHz	<-145 dBm, typ. -148 dBm
	3.6 GHz ≤ f < 10 GHz	<-147 dBm, typ. -150 dBm
	10 GHz ≤ f < 18 GHz	<-145 dBm, typ. -149 dBm
	18 GHz ≤ f < 22 GHz	<-142 dBm, typ. -145 dBm
	22 GHz ≤ f < 26.5 GHz	<-140 dBm, typ. -143 dBm
	26.5 GHz ≤ f < 32 GHz	<-135 dBm, typ. -138 dBm
	32 GHz ≤ f ≤ 40 GHz	<-133 dBm, typ. -135 dBm

	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW preselection = ON, preamplifier = OFF $f < 10 \text{ kHz}$ : RBW = 10 Hz, VBW = 30 Hz, trace average, sample detector, sweep count = 20, mean marker $f \geq 10 \text{ kHz}$ : RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker
all models	
20 Hz	typ. <-90 dBm
100 Hz	<-110 dBm
1 kHz	<-120 dBm
10 kHz	<-130 dBm
100 kHz	<-130 dBm
1 MHz	<-140 dBm
10 MHz	<-153 dBm
R&S®ESU8:	
$20 \text{ MHz} \leq f < 2 \text{ GHz}$	<-155 dBm, typ. -158 dBm
$2 \text{ GHz} \leq f < 2.5 \text{ GHz}$	<-151 dBm, typ. -154 dBm
$2.5 \text{ GHz} \leq f < 3 \text{ GHz}$	<-148 dBm, typ. -151 dBm
$3 \text{ GHz} \leq f < 3.6 \text{ GHz}$	<-142 dBm, typ. -145 dBm
$3.6 \text{ GHz} \leq f < 5 \text{ GHz}$	<-148 dBm, typ. -151 dBm
$5 \text{ GHz} \leq f < 6 \text{ GHz}$	<-147 dBm, typ. -150 dBm
$6 \text{ GHz} \leq f \leq 8 \text{ GHz}$	<-144 dBm, typ. -147 dBm
R&S®ESU26:	
$20 \text{ MHz} \leq f < 2 \text{ GHz}$	<-152 dBm, typ. -156 dBm
$2 \text{ GHz} \leq f < 3 \text{ GHz}$	<-147 dBm, typ. -151 dBm
$3 \text{ GHz} \leq f < 3.6 \text{ GHz}$	<-142 dBm, typ. -145 dBm
$3.6 \text{ GHz} \leq f < 10 \text{ GHz}$	<-147 dBm, typ. -150 dBm
$10 \text{ GHz} \leq f < 18 \text{ GHz}$	<-145 dBm, typ. -149 dBm
$18 \text{ GHz} \leq f < 22 \text{ GHz}$	<-142 dBm, typ. -145 dBm
$22 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$	<-140 dBm, typ. -143 dBm
R&S®ESU40:	
$20 \text{ MHz} \leq f < 2 \text{ GHz}$	<-152 dBm, typ. -156 dBm
$2 \text{ GHz} \leq f < 3 \text{ GHz}$	<-147 dBm, typ. -151 dBm
$3 \text{ GHz} \leq f < 3.6 \text{ GHz}$	<-142 dBm, typ. -145 dBm
$3.6 \text{ GHz} \leq f < 10 \text{ GHz}$	<-147 dBm, typ. -150 dBm
$10 \text{ GHz} \leq f < 18 \text{ GHz}$	<-145 dBm, typ. -149 dBm
$18 \text{ GHz} \leq f < 22 \text{ GHz}$	<-142 dBm, typ. -145 dBm
$22 \text{ GHz} \leq f < 26.5 \text{ GHz}$	<-140 dBm, typ. -143 dBm
$26.5 \text{ GHz} \leq f < 32 \text{ GHz}$	<-135 dBm, typ. -138 dBm
$32 \text{ GHz} \leq f \leq 40 \text{ GHz}$	<-133 dBm, typ. -135 dBm

	RF attenuation = 0 dB, termination = $50 \Omega$ , log. scaling, normalized to 1 Hz RBW preselection = ON, preamplifier = ON <sup>5</sup> $f < 10 \text{ kHz}$ : RBW = 10 Hz, VBW = 30 Hz, trace average, sample detector, sweep count = 20, mean marker $f \geq 10 \text{ kHz}$ : RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker
all models	
1 kHz	<-130 dBm
10 kHz	<-140 dBm
100 kHz	<-140 dBm
1 MHz	<-150 dBm
10 MHz	<-165 dBm
R&S®ESU8:	
$20 \text{ MHz} \leq f < 500 \text{ MHz}$	<-165 dBm, typ. -168 dBm
$500 \text{ MHz} \leq f < 2 \text{ GHz}$	<-162 dBm, typ. -165 dBm
$2 \text{ GHz} \leq f < 3 \text{ GHz}$	<-159 dBm, typ. -162 dBm
$3 \text{ GHz} \leq f < 3.6 \text{ GHz}$	<-154 dBm, typ. -157 dBm
$3.6 \text{ GHz} \leq f < 6 \text{ GHz}$	<-162 dBm, typ. -165 dBm
$6 \text{ GHz} \leq f \leq 8 \text{ GHz}$	<-160 dBm, typ. -163 dBm
R&S®ESU26:	
$20 \text{ MHz} \leq f < 2 \text{ GHz}$	<-162 dBm, typ. -165 dBm
$2 \text{ GHz} \leq f < 3 \text{ GHz}$	<-158 dBm, typ. -161 dBm
$3 \text{ GHz} \leq f < 3.6 \text{ GHz}$	<-155 dBm, typ. -158 dBm
$3.6 \text{ GHz} \leq f < 13 \text{ GHz}$	<-165 dBm, typ. -168 dBm
$13 \text{ GHz} \leq f < 22 \text{ GHz}$	<-163 dBm, typ. -165 dBm
$22 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$	<-160 dBm, typ. -163 dBm
R&S®ESU40:	
$20 \text{ MHz} \leq f < 2 \text{ GHz}$	<-162 dBm, typ. -165 dBm
$2 \text{ GHz} \leq f < 3 \text{ GHz}$	<-158 dBm, typ. -161 dBm
$3 \text{ GHz} \leq f < 3.6 \text{ GHz}$	<-155 dBm, typ. -158 dBm
$3.6 \text{ GHz} \leq f < 13 \text{ GHz}$	<-165 dBm, typ. -168 dBm
$13 \text{ GHz} \leq f < 22 \text{ GHz}$	<-163 dBm, typ. -165 dBm
$22 \text{ GHz} \leq f < 32 \text{ GHz}$	<-160 dBm, typ. -163 dBm
$32 \text{ GHz} \leq f \leq 40 \text{ GHz}$	<-155 dBm, typ. -158 dBm

<sup>5</sup> With option R&S®ESU-B24 the frequency range of the preamplifier is extended to the upper frequency limit of the instrument.

0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, preselection = OFF, preamplifier = OFF, low-noise preamplifier = ON RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, trace average, sweep count = 20, mean marker	
all models	
100 kHz	<-140 dBm
1 MHz	<-150 dBm
10 MHz	<-163 dBm
<b>R&amp;S®ESU8</b>	
20 MHz ≤ f < 2 GHz	<-165 dBm, typ. -168 dBm
2 GHz ≤ f < 3.6 GHz	<-163 dBm, typ. -166 dBm
3.6 GHz ≤ f < 6 GHz	<-162 dBm, typ. -165 dBm
6 GHz ≤ f ≤ 8 GHz	<-160 dBm, typ. -163 dBm
<b>R&amp;S®ESU26:</b>	
20 MHz ≤ f < 2 GHz	<-164 dBm, typ. -167 dBm
2 GHz ≤ f < 3 < 3.6 GHz	<-163 dBm, typ. -166 dBm
3.6 GHz ≤ f < 13 GHz	<-165 dBm, typ. -168 dBm
13 GHz ≤ f < 22 GHz	<-163 dBm, typ. -166 dBm
22 GHz ≤ f ≤ 26.5 GHz	<-160 dBm, typ. -163 dBm
<b>R&amp;S®ESU40:</b>	
20 MHz ≤ f < 2 GHz	<-164 dBm, typ. -167 dBm
2 GHz ≤ f < 3 < 3.6 GHz	<-163 dBm, typ. -166 dBm
3.6 GHz ≤ f < 13 GHz	<-165 dBm, typ. -168 dBm
13 GHz ≤ f < 22 GHz	<-163 dBm, typ. -166 dBm
22 GHz ≤ f < 32 GHz	<-160 dBm, typ. -163 dBm
32 GHz ≤ f ≤ 40 GHz	<-155 dBm, typ. -158 dBm

<b>Noise indication (receiver mode)</b>		
Nominal, calculated from DANL data		
RF attenuation = 0 dB, termination = $50 \Omega$ , average (AV) detector, preamplifier = OFF all models		
20 Hz, BW = 10 Hz	<27 dB $\mu$ V	
100 Hz, BW = 10 Hz	<7 dB $\mu$ V	
1 kHz, BW = 100 Hz	<7 dB $\mu$ V	
10 kHz, BW = 200 Hz	<0 dB $\mu$ V	
100 kHz, BW = 200 Hz	<0 dB $\mu$ V	
1 MHz, BW = 9 kHz	<7 dB $\mu$ V	
10 MHz, BW = 9 kHz	<-6 dB $\mu$ V	
R&S®ESU8:		
20 MHz $\leq f < 30$ MHz, BW = 9 kHz	<-8 dB $\mu$ V	
30 MHz $\leq f < 1$ GHz, BW = 120 kHz	<3 dB $\mu$ V	
1 GHz $\leq f < 2$ GHz, BW = 1 MHz	<12 dB $\mu$ V	
2 GHz $\leq f < 2.5$ GHz, BW = 1 MHz	<16 dB $\mu$ V	
2.5 GHz $\leq f < 3$ GHz, BW = 1 MHz	<19 dB $\mu$ V	
3 GHz $\leq f < 3.6$ GHz, BW = 1 MHz	<25 dB $\mu$ V	
3.6 GHz $\leq f < 5$ GHz, BW = 1 MHz	<19 dB $\mu$ V	
5 GHz $\leq f < 6$ GHz, BW = 1 MHz	<20 dB $\mu$ V	
6 GHz $\leq f < 8$ GHz, BW = 1 MHz	<23 dB $\mu$ V	
R&S®ESU26:		
20 MHz $\leq f < 30$ MHz, BW = 9 kHz	<-5 dB $\mu$ V	
30 MHz $\leq f < 1$ GHz, BW = 120 kHz	<6 dB $\mu$ V	
1 GHz $\leq f < 2$ GHz, BW = 1 MHz	<15 dB $\mu$ V	
2 GHz $\leq f < 3$ GHz, BW = 1 MHz	<20 dB $\mu$ V	
3 GHz $\leq f < 3.6$ GHz, BW = 1 MHz	<25 dB $\mu$ V	
3.6 GHz $\leq f < 10$ GHz, BW = 1 MHz	<20 dB $\mu$ V	
10 GHz $\leq f < 18$ GHz, BW = 1 MHz	<22 dB $\mu$ V	
18 GHz $\leq f < 22$ GHz, BW = 1 MHz	<25 dB $\mu$ V	
22 GHz $\leq f < 26.5$ GHz, BW = 1 MHz	<27 dB $\mu$ V	
R&S®ESU40:		
20 MHz $\leq f < 30$ MHz, BW = 9 kHz	<-5 dB $\mu$ V	
30 MHz $\leq f < 1$ GHz, BW = 120 kHz	<6 dB $\mu$ V	
1 GHz $\leq f < 2$ GHz, BW = 1 MHz	<15 dB $\mu$ V	
2 GHz $\leq f < 3$ GHz, BW = 1 MHz	<20 dB $\mu$ V	
3 GHz $\leq f < 3.6$ GHz, BW = 1 MHz	<25 dB $\mu$ V	
3.6 GHz $\leq f < 10$ GHz, BW = 1 MHz	<20 dB $\mu$ V	
10 GHz $\leq f < 18$ GHz, BW = 1 MHz	<22 dB $\mu$ V	
18 GHz $\leq f < 22$ GHz, BW = 1 MHz	<25 dB $\mu$ V	
22 GHz $\leq f < 26.5$ GHz, BW = 1 MHz	<27 dB $\mu$ V	
22 GHz $\leq f < 32$ GHz, BW = 1 MHz	<32 dB $\mu$ V	
32 GHz $\leq f < 40$ GHz, BW = 1 MHz	<34 dB $\mu$ V	

RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, preamplifier = ON <sup>6</sup> all models	
1 kHz, BW = 100 Hz	<-3 dBµV
10 kHz, BW = 200 Hz	<-10 dBµV
100 kHz, BW = 200 Hz	<-10 dBµV
1 MHz, BW = 9 kHz	<-3 dBµV
10 MHz, BW = 9 kHz	<-18 dBµV
R&S®ESU8:	
20 MHz ≤ f < 30 MHz, BW = 9 kHz	<-18 dBµV
30 MHz ≤ f < 500 MHz, BW = 120 kHz	<-7 dBµV
500 MHz ≤ f < 1 GHz, BW = 120 kHz	<-4 dBµV
1 GHz ≤ f < 2 GHz, BW = 1 MHz	<5 dBµV
2 GHz ≤ f < 3 GHz, BW = 1 MHz	<8 dBµV
3 GHz ≤ f < 3.6 GHz, BW = 1 MHz	<13 dBµV
3.6 GHz ≤ f < 6 GHz, BW = 1 MHz	<5 dBµV
6 GHz ≤ f ≤ 8 GHz, BW = 1 MHz	<7 dBµV
R&S®ESU26:	
20 MHz ≤ f < 30 MHz, BW = 9 kHz	<-15 dBµV
30 MHz ≤ f < 1 GHz, BW = 120 kHz	<-4 dBµV
1 GHz ≤ f < 2 GHz, BW = 1 MHz	<5 dBµV
2 GHz ≤ f < 3 GHz, BW = 1 MHz	<9 dBµV
3 GHz ≤ f < 3.6 GHz, BW = 1 MHz	<12 dBµV
3.6 GHz ≤ f < 13 GHz, BW = 1 MHz	<2 dBµV
13 GHz ≤ f < 22 GHz, BW = 1 MHz	<4 dBµV
22 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz	<7 dBµV
R&S®ESU40:	
20 MHz ≤ f < 30 MHz, BW = 9 kHz	<-15 dBµV
30 MHz ≤ f < 1 GHz, BW = 120 kHz	<-4 dBµV
1 GHz ≤ f < 2 GHz, BW = 1 MHz	<5 dBµV
2 GHz ≤ f < 3 GHz, BW = 1 MHz	<9 dBµV
3 GHz ≤ f < 3.6 GHz, BW = 1 MHz	<12 dBµV
3.6 GHz ≤ f < 13 GHz, BW = 1 MHz	<2 dBµV
13 GHz ≤ f < 22 GHz, BW = 1 MHz	<4 dBµV
22 GHz ≤ f < 32 GHz, BW = 1 MHz	<7 dBµV
32 GHz ≤ f ≤ 40 GHz, BW = 1 MHz	<12 dBµV

<sup>6</sup> With option R&S®ESU-B24 the frequency range of the preamplifier is extended to the upper frequency limit of the instrument.

Level measurement uncertainty		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level –30 dBm, reference level –30 dBm, RF attenuation 10 dB	
	preselection = OFF, preamplifier = OFF, low-noise preamplifier = OFF <sup>7</sup>	<0.2 dB ( $\sigma = 0.07$ dB)
	low-noise preamplifier = ON <sup>7</sup>	<0.3 dB ( $\sigma = 0.1$ dB)
	preselection/preamplifier = ON <sup>8</sup>	<0.3 dB ( $\sigma = 0.1$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation ≥10 dB, preselection = OFF, preamplifier = OFF, low-noise preamplifier = OFF <sup>7</sup>	
	+20 °C to +30 °C	
	20 Hz ≤ f < 10 MHz	<0.5 dB ( $\sigma = 0.16$ dB)
	10 MHz ≤ f < 2 GHz	<0.3 dB ( $\sigma = 0.1$ dB)
	2 GHz ≤ f < 3.6 GHz	<0.5 dB ( $\sigma = 0.16$ dB)
	3.6 GHz ≤ f < 8 GHz, span < 1 GHz	<1.5 dB ( $\sigma = 0.5$ dB)
	8 GHz ≤ f ≤ 40 GHz, span < 1 GHz	<2.0 dB ( $\sigma = 0.7$ dB)
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values
	+5 °C to +45 °C	
	20 Hz ≤ f < 3.6 GHz	<0.6 dB ( $\sigma = 0.2$ dB)
	3.6 GHz ≤ f < 8 GHz	add 0.5 dB to above values
	8 GHz ≤ f < 26.5 GHz	add 1.0 dB to above values
	26.5 GHz ≤ f ≤ 40 GHz	add 1.5 dB to above values
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥10 dB, preselection = OFF, preamplifier = OFF, low-noise preamplifier = ON <sup>7</sup>	
	+20 °C to +30 °C	
	100 kHz ≤ f < 10 MHz	<0.8 dB ( $\sigma = 0.26$ dB)
	10 MHz ≤ f < 3.6 GHz	<0.6 dB ( $\sigma = 0.2$ dB)
	3.6 GHz ≤ f < 8 GHz, span < 1 GHz	<1.5 dB ( $\sigma = 0.5$ dB)
	8 GHz ≤ f ≤ 40 GHz, span < 1 GHz	<2.0 dB ( $\sigma = 0.7$ dB)
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values
	+5 °C to +45 °C	
	100 kHz ≤ f < 10 MHz	<1.0 dB ( $\sigma = 0.33$ dB)
	10 MHz ≤ f < 3.6 GHz	<0.8 dB ( $\sigma = 0.26$ dB)
	3.6 GHz ≤ f < 22 GHz	add 0.5 dB to above values
	22 GHz ≤ f < 26.5 GHz	add 1.0 dB to above values
	26.5 GHz ≤ f ≤ 40 GHz	add 2.0 dB to above values
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥10 dB, preselection = ON, preamplifier = ON <sup>9</sup>	
	+20 °C to +30 °C	
	1 kHz ≤ f < 10 MHz	<0.8 dB ( $\sigma = 0.26$ dB)
	10 MHz ≤ f < 2 GHz	<0.6 dB ( $\sigma = 0.2$ dB)
	2 GHz ≤ f < 3.6 GHz	<0.8 dB ( $\sigma = 0.26$ dB)
	3.6 GHz ≤ f < 8 GHz, span < 1 GHz	<1.5 dB ( $\sigma = 0.7$ dB)
	8 GHz ≤ f ≤ 40 GHz, span < 1 GHz	<2.0 dB ( $\sigma = 0.7$ dB)
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values

<sup>7</sup> Only available in analyzer mode.<sup>8</sup> With option R&S®ESU-B24 the frequency range of the preamplifier is extended to the upper frequency limit of the instrument.<sup>9</sup> With option R&S®ESU-B24 the frequency range of the preamplifier is extended to the upper frequency limit of the instrument.

$+5^{\circ}\text{C}$ to $+45^{\circ}\text{C}$	
1 kHz $\leq f < 3.6$ GHz	<0.9 dB ( $\sigma = 0.3$ dB)
3.6 GHz $\leq f < 22$ GHz	add 0.5 dB to above values
22 GHz $\leq f < 26.5$ GHz	add 1.0 dB to above values
26.5 GHz $\leq f \leq 40$ GHz	add 2.0 dB to above values
RF attenuation $> 40$ dB or $f \geq 3.6$ GHz, span $\geq 1$ GHz	add 0.5 dB to above values

Second harmonic intercept (SHI)	R&S®ESU26, R&S®FSU40: $f_{\text{in}} > 1.8$ GHz	>65 dBm, nominal
---------------------------------	--	------------------

VSWR	RF attenuation <10 dB, DC coupled, $+5^{\circ}\text{C}$ to $+30^{\circ}\text{C}$
	$f \leq 1$ GHz
	1 GHz $\leq f < 2.5$ GHz
	2.5 GHz $< f \leq 3.6$ GHz
	$f \geq 3.6$ GHz

## Ordering information

Designation	Type	Order No.
EMI Test Receiver 20 Hz to 8 GHz	R&S®ESU8	1302.6005.08
EMI Test Receiver 20 Hz to 26.5 GHz	R&S®ESU26	1302.6005.26
EMI Test Receiver 20 Hz to 40 GHz	R&S®ESU40	1302.6005.40
<b>Accessories supplied</b>		
Power cable, probe power cable, printed quick start guide and CD-ROM (with operating manual and service manual)		
R&S®ESU26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connector		
R&S®ESU40: test port adapter with K female (1036.4790.00) and N female (1036.4777.00) connector		

## Options

Designation	Type	Order No.	Retrofittable	Remarks
<b>Options</b>				
OCXO, low aging/ improved phase noise at 10 Hz carrier offset	R&S®FSU-B4	1144.9000.02	yes	
Tracking Generator, 100 kHz to 3.6 GHz	R&S®FSU-B9	1142.8994.02	yes	
External Generator Control	R&S®FSP-B10	1129.7246.03	yes	
Output Attenuator, 0 dB to 70 dB, for R&S®FSU-B9	R&S®FSU-B12	1142.9349.02	yes	requires R&S®FSU-B9
Removable Hard Disk	R&S®ESU-B18	1303.0400.06	no	
Second Hard Disk for R&S®ESU-B18	R&S®ESU-B19	1303.0500.06	–	requires R&S®ESU-B18
Low-Noise Preamplifier (100 kHz to 8 GHz)	R&S®ESU-B24	1157.2100.08	yes	for R&S®ESU8 only
Low-Noise Preamplifier (100 kHz to 26.5 GHz)	R&S®ESU-B24	1157.2100.26	yes	for R&S®ESU26 only
Low-Noise Preamplifier (100 kHz to 40 GHz)	R&S®ESU-B24	1157.2100.40	yes	for R&S®ESU40 only
<b>Firmware/software</b>				
Time Domain Scan	R&S®ESU-K53	1305.8509.02	yes	key code
Triggered Scan for Coverage Meas.	R&S®ESPIK50	1106.4386.02	yes	key code

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
Printed manuals (includes operating and service manuals)		1302.6170.32
IEC/IEEE Bus Cable, 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-411	1096.3283.00
Adapter for mounting on telescopic rails (only with 19" Adapter R&S®ZZA-411)	R&S®ZZA-T45	1109.3774.00
<b>Matching pads, 50/75 Ω</b>		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>SWR bridges, 50 Ω</b>		
SWR Bridge, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X (X = 2/3/5/6)
SWR Bridge, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X (X = 2/5)
<b>High power attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.XX (XX = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.XX (XX = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>Connectors and cables</b>		
Probe power connector, 3 pin		1065.9480.00
<b>For R&amp;S®ESU26 only</b>		
Test port adapter, N male		1021.0541.00
Test port adapter, 3.5 mm male		1021.0529.00
Microwave Measurement Cable with test port adapter set N male and 3.5 mm male	R&S®FSE-Z15	1046.2002.02
<b>For R&amp;S®ESU40 only</b>		
Test port adapter, N male		1036.4783.00
Test port adapter, K male		1036.4802.00
Test Port Adapter, 2.4 mm female	R&S®FSE-Z5	1088.1627.02

## Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, radiomonitoring and radiolocation. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

## Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 82 28 | +86 400 650 58 96  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners

PD 5213.6693.22 | Version 02.01 | August 2016 (pw/we)

R&S®ESU EMI Test Receiver

Data without tolerance limits is not binding | Subject to change

© 2007 - 2016 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5213669322