

2kVA and 3kVA AC Programmable Power Sources

<https://product.tdk.com/en/power/gac>
www.emea.lambda.tdk.com/gac



Compact and easy to use, the Genesys AC programmable 1U AC Power Sources offer single phase 2 and 3kVA, multiple units can be combined for higher power and multi-phase operation. Offering a wide single range of AC power with voltage of 0-350 Vac in all models, and up to 606 Vac in three phase configurations. The GAC-PRO models additionally include $\pm 500\text{Vdc}$ capability, allowing AC, DC and AC+DC operation. Multiple remote programming interfaces are standard: LAN, USB, RS232 & RS485, with remote GUI, webpage interface, LabView and SCPI drivers included. Isolated analogue interfaces allow analog control and, analog output for monitoring, as well as a number of in/out triggers and relays. The GENESYS™ AC PRO models also include real time analog control functionality necessary for more complex test scenarios such as PHIL. The Genesys AC series has a full colour LCD, multi-language, touch panel display for ease of use with intuitive menus, settings and data displays.

Features	Benefits
• 1U high	• Less Rack Space Used
• Full Colour Touch Panel Display	• Easy to Read and Program
• Built-in USB, LAN, RS-232 & RS-485 (plus others) Interfaces	• No Additional Cost
• Parallelable to 9kW single and multi-phase	• Scalable for Larger Systems and Multiple Phase Operation
• Five Year Warranty	• Low Cost of Ownership

Part Numbering Scheme

An easy to use on-line part number configurator is available. Click [here](#) for EMEA region. Click [here](#) for the Americas region.



GAC-PRO	-	09	B	A	1	A	-	00	A	00	A
Series Name			Front Panel Type/Color		Communication Interface			Frequency Limit			Accessories
GAC			A - Full Panel (Grey)		1 - Built-in RS232, RS485, USB, LAN			A - AC Mode, 1200Hz			A - None
GAC-PRO			B - Full Panel (Black)					B - AC + DC Mode, 1200Hz*			
			C - Blank Panel (Grey)					C - AC + DC Mode, 5000Hz*			Additional Options
			D - Blank Panel (Black)								00 - None
Apparent Output Power			Input Voltage		Avionic Standards *(GAC-PRO Only)						
02 = 2kVA			A - 85-265Vac single phase **		00 - None						GAC Only
03 = 3kVA			B - 170-265Vac 3-phase		01 - RTCA/DO 160						
06 = 6kVA			C - 342-528Vac 3-phase		02 - MIL-STD 704						
09 = 9kVA			** 2kVA, 3kVA only		03 - A350 (Airbus ABD100.1.8.1)						GAC-PRO Only
					04 - RTCA/DO 160 & MIL-STD 704						
					05 - RTCA/DO 160 & A350 (Airbus ABD100.1.8.1)						
					06 - MIL-STD 704 & A350 (Airbus ABD100.1.8.1)						
					07 - RTCA/DO 160 & MIL-STD 704 & A350 (Airbus ABD100.1.8.1)						
					IEC & Other Standards						
					A - None						
					B - IEC61000-4-11						GAC-PRO Only*
					C - IEC61000-4-13						GAC-PRO Only*
					D - MIL-STD-1399-300 PART 1						GAC-PRO Only*
					E - IEC61000-4-11 & IEC61000-4-13						GAC-PRO Only*
					F - IEC61000-4-11 & MIL-STD-1399-300 PART 1						GAC-PRO Only*
					G - IEC61000-4-13 & MIL-STD-1399-300 PART 1						GAC-PRO Only*
					H - IEC61000-4-11 & IEC61000-4-13 & MIL-STD-1399-300 PART 1						GAC-PRO Only*
					I - Wave Generator & Harmonic Analysis						GAC ONLY
					J - IEC61000-4-11 & Wave Generator & Harmonic Analysis						GAC ONLY
					K - IEC61000-4-13 & Wave Generator & Harmonic Analysis						GAC ONLY
					L - IEC61000-4-11 & IEC61000-4-13 & Wave Generator & Harmonic Analysis						GAC ONLY

Specification				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
AC Input				
Nominal Input Voltage	Vac	1-Phase: 100 – 240 3-Phase 200: 190 – 240 3-Phase 480: 380 – 480		Output power is limited to 1500W or 1500VA at input voltage below 170Vac
Input Voltage Range	Vac	1-Phase: 85 – 265 3-Phase 200: 190 – 240 3-Phase 480: 380 – 480		Output power is limited to 1500W or 1500VA at input voltage below 170Vac
Maximum Input Current	A	1-Phase: 12.4 at 200Vac 3-Phase 200Vac: 7.5 at 200Vac 3-Phase 480Vac: 4 at 380Vac	1-Phase: 18.5 at 200Vac 3-Phase 200Vac: 11.2 at 200Vac 3-Phase 480Vac: 6 at 380Vac	
Input Frequency	Hz	Nominal: 50 – 60, Frequency range: 47 – 63		
Power Factor	%	1-Phase: 0.96 1-Phase: 0.98	3-Phase: 0.92 3-Phase: 0.94	Typical at rated output power, rated output current. DC mode or sine wave the load power factor is 1
Efficiency	%	1-Phase: 78 3-Phase: 79	1-Phase: 81.5 3-Phase: 82.5	Typical at rated output power, rated output current, DC mode or sine wave, load power factor is 1 3-Phase 200V models at 200Vac input, 3-Phase 480V at 380Vac input.
Hold Up Time (typ)	ms	≥10	≥10	Typical at rated output power, rated output current. DC mode or sine wave the load power factor is 1
Inrush Peak Current	A	<52	<52	Not including the EMI filter inrush current, less than 0.2ms. 1-Phase input, at input line ≥ 240Vac, less than 70A.
Programming				
AC Output Voltage				Combined with AC and DC output, the peak voltage must be between -500V to +500V
Rated RMS Output Voltage	V	350 Line-Neutral		Minimum voltage is guaranteed to a maximum 0.1% of the rated output voltage (350Vac, 500Vdc)
Setting Range	V	0 – 350.2		Maximum RMS voltage setting range is associated with the output current setting. When the output current setting is above 5.714A for 2kVA or 8.571A for 3kVA, the output voltage setting is limited to rated output power. Refer to Figure 1 and Figure 3.
Programming Resolution	V	≤0.02		
Programming Accuracy	%	16 – 1200Hz: ≤0.2, 1200.1 – 5000Hz: ≤0.4		
AC Output Current				
Rated Output RMS current	A	20	30	Minimum current is guaranteed to maximum 0.2% of rated output current.
Peak Repetitive Current (Max Crest Factor)	A peak (CF)	120A (6:1)	120A (4:1)	
Setting Range	A	1 – 20.2	1.5 – 30.2	Maximum RMS current setting range is associated with the output voltage setting. When the output voltage setting is above 100Vac, the output current setting is limited to rated output power. Minimum constant current regulation value is 5% of the rated output current.
AC Output Power				
Rated Output Apparent Power	VA	2000	3000	
Load Power Factor	-	0 – 1 (leading or lagging)		
Frequency				
Range	Hz	Standard Models 16-1200, 5000Hz models: 16 – 5000		
Programming Resolution	Hz	16 – 1200Hz: 0.01, 1200.1 – 5000Hz: 0.1		
Programming Accuracy	%	≤0.01		

Specification				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
DC Output Voltage				
Rated Output DC Voltage	Vdc	±500		Minimum voltage is guaranteed to maximum 0.1% of rated output voltage (350Vac, 500Vdc)
DC Voltage Setting Range	Vdc	-500 to +500		Maximum DC voltage setting range is associated with the output current setting. When the output current setting is above 4A for 2kW or 6A for 3kW, the output voltage setting is limited to rated output power. Refer to Figure 2 and Figure 4.
Programming Resolution	Vdc	≤0.02		
Programming Accuracy	%	≤0.15		
DC Output Current				
Rated Output DC Current	Adc	20	30	Minimum current is guaranteed to maximum 0.2% of rated output current.
Setting Range	Adc	1 – 20.2	1 – 30.2	Maximum DC current setting range is associated with the output voltage setting. When the output voltage setting is above 100VDC, the output current setting is limited to rated output power.
DC Output Power				
Rated Output Power	W	2000	3000	

Specification				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
Output Voltage				
AC Voltage Resolution	V	≤0.02		
AC Voltage Accuracy	%	16 – 1200Hz: ≤0.2, 1200.1 – 5000Hz: ≤0.4		
DC Voltage Resolution	Vdc	≤0.02		
DC Voltage Accuracy	%	≤0.02		
Output Current				
RMS Current Resolution	A	≤0.005		
RMS Current Accuracy	%	≤1	≤0.6	
DC Current Resolution	Adc	≤0.005		
DC Current Accuracy	%	≤1	≤0.6	
Peak Current Resolution	A (peak)	≤0.005		
Peak Current Accuracy	%	≤1.5		
Output Power				
Active (real) Power Resolution	W	≤0.2		
Active (real) Power Accuracy	%	AC: ≤2.25, DC: ≤4.5	AC: ≤1.5, DC: ≤3	
Apparent Power Resolution	W	≤0.2		
Apparent Power Accuracy	%	≤2.25	≤1.5	
Frequency				
Resolution	Hz	16 – 1200Hz: 0.01, 1200.1 – 5000Hz: 0.1		
Accuracy	%	≤0.1		Accuracy is guaranteed above 5% of rated output voltage.
Harmonics Measurement				
Fundamental Frequency	Hz	16 – 1000		
Harmonic Frequency / Harmonic #	Hz	32 – 50000 / 2 – 50		
Measurement Items	-	RMS Voltage, RMS current, phase angle and THD		

Specification				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
Stability				
Line Regulation	%	≤0.02		Load power factor is 1. Load power factor is 1.
Load Regulation	%	≤0.03		
Total Harmonic Distortion (THD)	%	16 – 500: ≤0.4, 500 – 1200: ≤0.7, 1200 – 5000: ≤1		
Temperature Coefficient	ppm/°C	50		ppm/°C of rated output voltage, following 30 minutes warm-up.
Temperature Stability (voltage)	%	±0.05 of FS over 8 hours. Constant line, load, and temperature. Remote sense connected		
Warm-up Drift (voltage)	%	Less than 0.05% of rated output voltage over 30 minutes following power on		
Supplemental				
Ripple RMS	mVdc	≤500		Time for output voltage to recover within 0.5% of its rated output for a load change 10~90% of rated output current. Output set point: 10 – 100%, local sense, load power factor is 1. At 10% to 90% of the output voltage.
Transient Response Time	μs	≤40		
Response Speed T(rise), T(fall)	μs	1200Hz models: ≤120; 5000Hz models: ≤40		
Voltage Slew Rate (typical)	V/μs	1200Hz models: 4.4; 5000Hz models: 16.34		
DC Offset Voltage (typical)	mVdc	≤35		
Remote Sense Compensation	-	AC, AC+DC mode: 35Vrms, 50V (peak); DC Mode: 35Vdc		
Start-up Delay	seconds	<7		
Parallel Operation	-	Possible. Form 3-phase system or increase 1-phase output power		
Environmental				
Operating Temperature	°C / °F	0 – 40 / 32 – 104		
Storage Temperature	°C / °F	-30 – 85 / -22 – 185		
Operating Environment	-	Overvoltage category II, Indoor use		
Operating Humidity	%	20 – 90 RH (no condensation)		
Storage Humidity	%	10 – 95 RH (no condensation)		
Altitude	m / feet	Operating: 2000 / 6562, Non-operating: 12000 / 39370		
Protective Functions				
Foldback Protection	-	Output shutdown when power source changes mode from CV to CC mode or from CC to CV mode. User presetable		
Output Overvoltage Protection (OVP)	-	Output shutdown when overvoltage is sensed on the output. Programming range: 110%. Accuracy: ≤0.5%		
Output Overvoltage Protection (OVP) Type	-	RMS – Shutdown when RMS voltage exceeds OVP RMS setting. Peak – shut-down when peak voltage exceeds OVP Peak setting		
Overtemperature Protection (OTP)	-	Output shutdown when ambient temperature sensor or internal temperature sensors thresholds are exceeded		
Overcurrent Protection (OCP)	-	Output shutdown when peak overcurrent is sensed on the output. Programming range: Up to 120A.		
AC Input Protection	-	Fuse on each phase, two fuses in 1-Phase input, three fuses in 3-Phase input. Not user accessible		
Output Undervoltage Limit (UVL)	-	Prevents adjusting output voltage below limit		
Output Undervoltage Protection (UVP)	-	Output shutdown when undervoltage is sensed on the output		
Remote Control Interfaces (isolated from the output)				
USB	-	2.0, Full Speed, Virtual COM Port, Type B high retention connector		
RS232	-	Up to 921.6kbps with optional handshake (RTS/CTS), DB9 connector		
RS485	-	Up to 921.6kbps, full duplex (4-wire), DB9 connector (shared with RS232)		
LAN	-	10/100Mbps, Auto-MDIX, Auto-Negotiation, built-in web server		

Specification				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
Signals and Controls (isolated from the output)				
Constant Voltage / Constant Current Monitor	-	Open collector. CC mode: On (0 – 0.6V). CV mode: Off. Maximum voltage: 30V. Maximum sink current: 10mA		
Power Supply OK #2 Monitor	-	Push pull. Output on: 4.5 – 5.5V. Output off: 0 – 0.6V. Maximum source / sink current: 10mA		
Power Supply OK #1 Monitor	-	Open collector. Output on: On (0 – 0.6V). Output off: Off. Maximum voltage: 30V. Maximum sink current: 10mA		
Trigger In Signals	-	Maximum low level input voltage: 0.8V. Minimum high level input voltage: 2.5V. Maximum high level input: 5V Positive edge trigger width: 10us minimum. Maximum Tr,Tf: 1us. Minimum delay between 2 pulses: 1ms		
Trigger Out Signals	-	Maximum low level output voltage: 0.6V. Minimum high level output voltage: 4.5V. Maximum high level output voltage: 5V Maximum source / sink current: 10mA. Minimum pulse width:100us		
Local / Remote Analog Programming Monitor	-	Open collector. Remote: On (0 – 0.6V). Local: Off. Maximum Voltage: 30V. Maximum sink current: 10mA		
Local / Remote Analog Programming Enable	-	Enable / Disable analog programming control by electrical signal or dry contact. Remote: On (0 – 0.6V) or short. Local: Off (2 – 30V) or open		
Enable / Disable (ENA) Power Source Output	-	Enable / Disable power source output by electrical signal or dry contact. Voltage levels: 0 – 0.6V or short, 2 – 30V or open User selectable output on / off logic		
Interlock (ILC) Inhibit Power Source Output	-	Enable / Disable power source output by electrical signal or dry contact. Output on: 0 – 0.6V or short. Output OFF: 2 – 30V or open		
Programmed Signals	-	Two open drain programmable signals. Maximum voltage: 25V. Maximum sink current: 100mA		
AC Input Voltage OK Monitor	-	Open collector. AC input voltage OK: 0 – 0.6V. AC input voltage not OK: Off. Maximum voltage: 30V. Maximum sink current: 10mA		
Alarm (Fault) Monitor	-	Open collector. No faults: 0 – 0.6V. power source fault: Off. Maximum voltage: 30V. Maximum sink current: 10mA		
Emergency Power Off (EPO)	-	Enable / Disable power source output by electrical signal or dry contact. Output on: 0 – 0.6V or short. Output OFF: 2 – 30V or open		
Analog programming and monitoring (isolated from the output)				
Output Voltage Programming	-	Full mode range: ±0 – 10V. RMS mode range: 0 – 10V. User selectable range: ±2.5 – 10V. Accuracy: 0.3%		RMS mode, programming and monitoring.
Output Voltage Monitoring	-	Full mode range: ±0 – 10V. RMS mode range: 0 – 10V. User selectable range: ±2.5 – 10V. Accuracy: 0.4%		RMS mode, programming and monitoring.
Output Current Monitoring	-	Full mode range: ±0 – 10V. RMS mode range: 0 – 10V. User selectable range: ±2.5 – 10V. Accuracy: 2kVA - ≤1.3%; 3kVA - ≤0.9%		RMS mode, programming and monitoring.

Specification			
Model	2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
Software / Firmware Test Sequences			
RTCA/DO 160	-	Environmental conditions and test procedures for airborne equipment	Available in Genesys AC Pro (must be acquired)
MIL-STD 704	-	Aircraft electric power characteristics	
A350 (Airbus ABD100.1.8.1)	-	Electric characteristics of A350 AC and DC equipment	
MIL-STD-1399-300 PART 1	-	Low voltage electric power, alternating current	
IEC61000-4-11	-	Voltage dips, short interruptions and voltage variations immunity	Available in Genesys AC and Genesys AC Pro (must be acquired)
IEC61000-4-13	-	Harmonics and interharmonics including mains signalling at a.c. power port	
IEC61000-4-14	-	Voltage fluctuation immunity test for equipment with input current not exceeding 16 A per phase	Available in Genesys AC and Genesys AC Pro. Wave Generator & Harmonic Analysis must be acquired acquired in Genesys AC.
IEC61000-4-17	-	Ripple on d.c. input power port immunity	
IEC61000-4-27	-	Unbalance, immunity test for equipment with input current not exceeding 16 A per phase	
IEC61000-4-28	-	Variation of power frequency, immunity test for equipment with input current not exceeding 16 A per phase	
IEC61000-4-29	-	Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests	
IEC61000-4-34	-	Voltage dips, short interruptions and voltage variations immunity tests for equipment with mains current more than 16 A per phase	

Output Characteristics

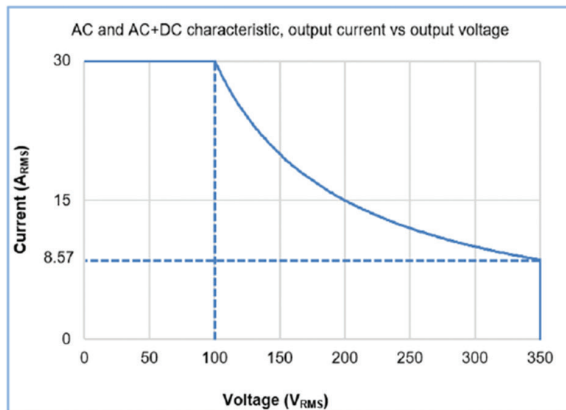


Figure 1: 3kVA AC and AC+DC characteristic

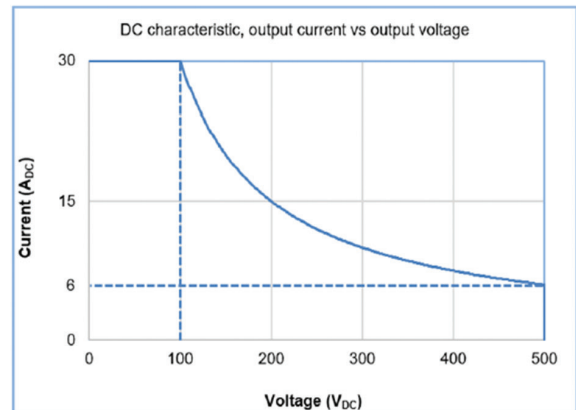


Figure 2: 3kW DC characteristic

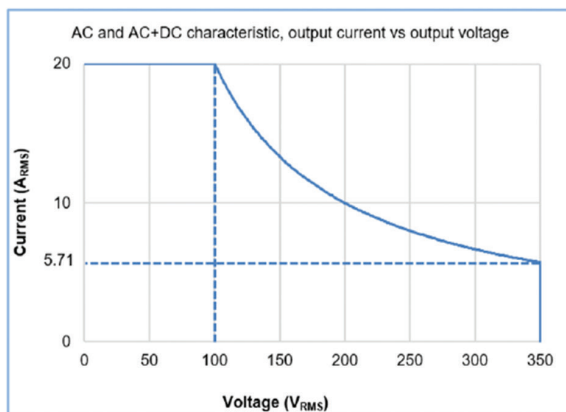


Figure 3: 2kVA AC and AC+DC characteristic

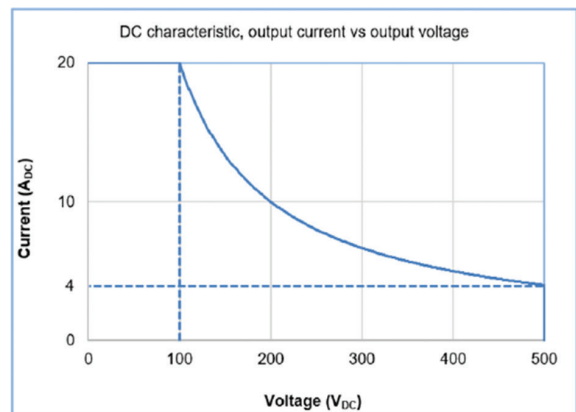


Figure 4: 2kW DC characteristic

Measurement

Model	2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
-------	----------------------------	----------------------------	-------


Mechanical

Cooling	-	Forced air cooling by internal fans. Airflow direction: From front panel to power supply rear	
Weight	kg	≤8	
Dimensions	mm	Without strain relief: W: 423, H: 43.6, D: 544.5, With strain relief: W: 423, H: 43.6, D: 640.5	
Vibration	-	MIL-PRF-28800F, Class 3; 5-500 Hz per Paragraph 4.5.5.3.1	
Shock	-	MIL-PRF-28800F, Class 3; 30G half-sine with 11ms duration per 4.5.5.4.1	
Transportation Integrity	-	ISTA 1A	

Regulatory Compliance (safety / EMC)

Safety	-	IEC/UL/EN 61010-1 Ed. 3 (cTUVus, T-Mark, CE/UKCA)	Class I; Pollution Degree 2.
Interface Classification	-	Input, output (including sense), J9 and J10 are hazardous; J1, J2, J3, J4, J5, J6, J7 and J8 are non-hazardous	
Withstand Voltage	Vdc 1min	Input – Output (including sense), J1, J2, J3, J4, J5, J6, J7, J8, J9 and J10: 4000 Output (including sense), J9 and J10 – J1, J2, J3, J4, J5, J6, J7 and J8: 3850 Output (including sense), J9 and J10 – Ground: 3060 Input – Ground: 2835	
Isolation resistance	MΩ	>100 at 25°C, 70%RH, output to ground 500Vdc	
Isolation to Ground	V	350Vac, 500Vdc	
EMC General	-	EN 61326-1:2021	
Immunity	-	EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11	
Conducted and Radiated Emissions	-	CISPR11 Class A	

Outline Drawing

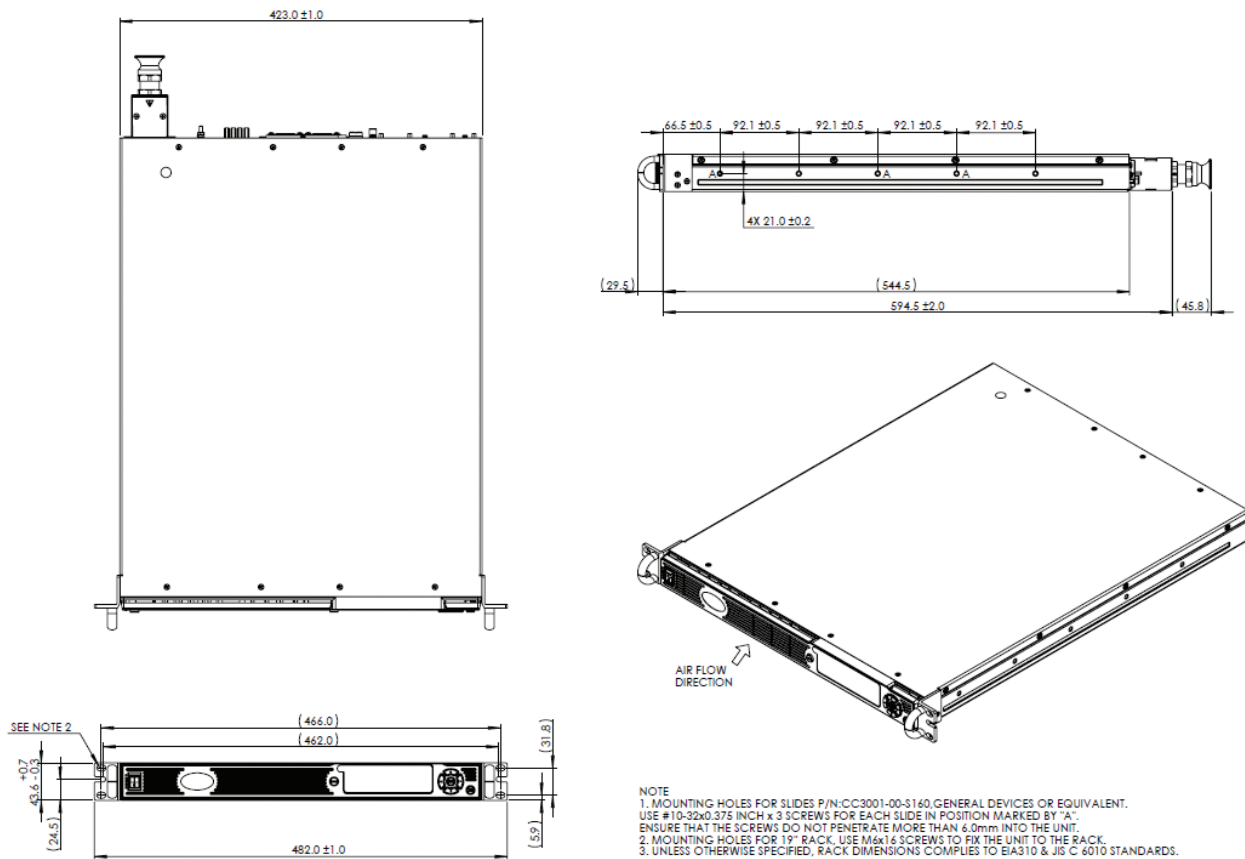

NOTE
 1. MOUNTING HOLES FOR SLIDES P/N:CC3001-00-S160, GENERAL DEVICES OR EQUIVALENT. USE #10-32x0.375 INCH x 3 SCREWS FOR EACH SLIDE IN POSITION MARKED BY "A". ENSURE THAT THE SCREWS DO NOT PENETRATE MORE THAN 6.0mm INTO THE UNIT.
 2. MOUNTING HOLES FOR 19" RACK. USE M6x16 SCREWS TO FIX THE UNIT TO THE RACK.
 3. UNLESS OTHERWISE SPECIFIED, RACK DIMENSIONS COMPLY TO EIA310 & JIS C 6010 STANDARDS.



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
tlf.fr-powersolutions@tdk.com
www.emea.lambda.tdk.com/fr



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tla.powersolutions@tdk.com
www.us.lambda.tdk.com



Italy Sales Office

Tel: +39 02 61 29 38 63
tlf.it-powersolutions@tdk.com
www.emea.lambda.tdk.com/it



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



Netherlands

tlf.nl-powersolutions@tdk.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda Europe GmbH

Tel: +49 7841 666 0
tlg.powersolutions@tdk.com
www.emea.lambda.tdk.com/de



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
tlc.powersolutions@tdk.com
www.lambda.tdk.com.cn



Austria Sales Office

Tel: +43 2256 655 84
tlg.at-powersolutions@tdk.com
www.emea.lambda.tdk.com/at



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tts.marketing@tdk.com
www.sg.lambda.tdk.com



Switzerland Sales Office

Tel: +41 44 850 53 53
tlg.ch-powersolutions@tdk.com
www.emea.lambda.tdk.com/ch



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com



TDK-Lambda Europe GmbH

Tel: Tel. +45 3222 8086
tlg.dk-powersolutions@tdk.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
tlu.powersolutions@tdk.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
tli.powersolutions@tdk.com
www.emea.lambda.tdk.com/il-en

