

# Spectrum Master™

## High Performance Handheld Spectrum Analyzer

### MS2725C

9 kHz to 32 GHz

#### Introduction

Anritsu's high performance handheld spectrum analyzer provides the wireless professional the performance needed for the most demanding measurements in harsh RF and physical environments. Whether it is for spectrum monitoring, broadcast proofing, interference analysis, RF and microwave measurements, regulatory compliance, or Wi-Fi and wireless network measurements, the Spectrum Master is the ideal instrument for making fast and reliable measurements.

#### Spectrum and Interference Analyzer Highlights

- Measure: Occupied Bandwidth, Channel Power, ACPR, C/I
- Interference Analyzer: Spectrogram, Signal Strength, RSSI
- Dynamic Range: > 104 dB in 1 Hz RBW
- DANL: -160 dBm in 1 Hz RBW
- Phase Noise: -100 dBc/Hz @ 10 kHz offset at 1 GHz
- Frequency Accuracy: ±25 ppb with GPS On


- 1 Hz to 10 MHz Resolution Bandwidth (RBW)
- Traces: Normal, Max Hold, Min Hold, Average, # of Averages
- Detectors: Peak, Negative, Sample, Quasi-peak, and true RMS
- Markers: 6, each with a Delta Marker, or 1 Reference with 6 Deltas
- Limit Lines: up to 40 segments with one-button envelope creation
- Trace Save-on-Event: crossing limit line or sweep complete

#### Capabilities and Functional Highlights

- LTE, TD-LTE
- GSM/EDGE
- W-CDMA/HSPA+
- TD-SCDMA/HSPA+
- CDMA, EV-DO
- Fixed, Mobile WiMAX
- AM/FM/SSB Demodulator
- Zero-span IF Output
- Gated Sweep
- GPS tagging of stored traces
- Internal Preamplifier standard

- High Accuracy Power Meter
- 4, 6, 8, 18, 26 GHz USB Sensors
- Channel Scanner
- 8.4 inch Display
- Burst Detect

- < 5 minute warm-up time
- 2.5 hour battery operation time
- Ethernet/USB Data Transfer
- MST Remote Access Tool

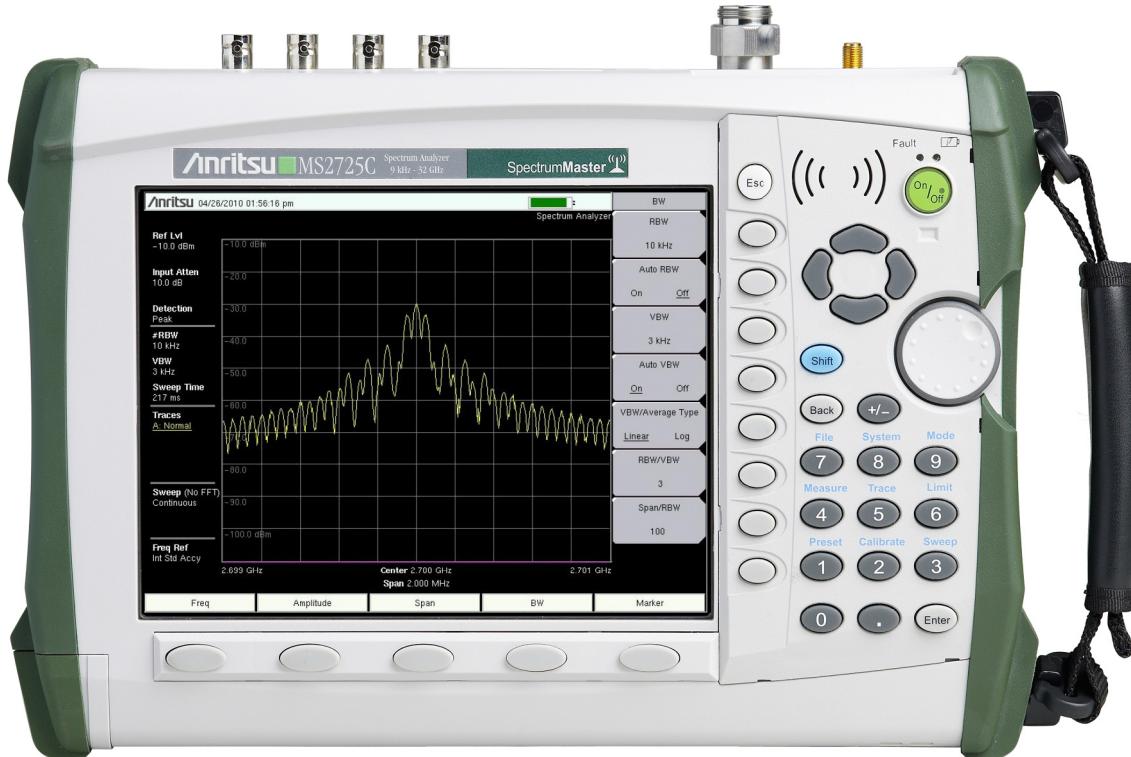

Spectrum Master™ MS2725C Spectrum Analyzer  
Handheld Size: 315 mm x 211 mm x 77 mm (12.4 in x 8.3 in x 3.0 in), Lightweight: 3.8 kg (8.5 lb)



## Spectrum Analyzer

All specifications and characteristics apply to instruments under the following conditions, unless otherwise stated: 1) Instrument within its recommended calibration cycle, 2) After 5 minutes of warm-up time, where the instrument has completely stabilized to the ambient temperature, 3) Internal frequency reference used, 4) Cable analyzer and VNA measurements applicable after standard OSL calibration is performed using Anritsu calibration components, 5) Typical data does not include guard band for measurement uncertainty and temperature variation and is not warranted, 6) All specifications subject to change without notice, 7) Recommended calibration cycle is 12 months.

### Measurements

Smart Measurements	Field Strength (uses antenna calibration tables to measure dBm/m <sup>2</sup> , dBW/m <sup>2</sup> , V/m, A/m, Watt/m <sup>2</sup> , Watt/cm <sup>2</sup> , or dBmV/m) Occupied Bandwidth (measures 99 % to 1 % power channel of a signal) Channel Power (measures the total power in a specified bandwidth) ACPR (adjacent channel power ratio) AM/FM/SSB Demodulation (wide/narrow FM, upper/lower SSB), (audio out only) C/I (carrier-to-interference ratio) Emission Mask (recall limit lines as emission mask)
--------------------	---

### Setup Parameters

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/RBW
File	Save, Recall, Delete, Directory Management
Save/Recall	Setups, Measurements, Limit Lines, Screen Shots JPEG (save only), Save-on-Event
Save-on-Event	Crossing Limit Line, Sweep Complete, Save-then-Stop, Clear All
Delete	Selected File, All Measurements, All Mode Files, All Content
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB, Copy
Application Options	Impedance (50 Ω, 75 Ω, Other)

### Sweep Functions

Sweep	Single/Continuous, Manual Trigger, Reset, Detection, Minimum Sweep Time, Trigger Type
Sweep Mode	Fast, Performance, No FFT, Burst Detect
Detection	Peak, RMS/Avg, Negative, Sample, Quasi-peak
Triggers	Free Run, External, Video, Delay, Level, Slope, Hysteresis, Holdoff, Force Trigger Once

### Trace Functions

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A → B, B <→ C, Max Hold, Min Hold
Trace C Operations	A → C, B <→ C, Max Hold, Min Hold, A - B → C, B - A → C, Relative Reference (dB), Scale

### Marker Functions

Markers	Markers 1-6 each with a Delta Marker, or Marker 1 Reference with Six Delta Markers, Marker Table (On/Off/Large), All Markers Off
Marker Types	Style (Fixed/Tracking), Noise Marker, Frequency Counter Marker
Marker Auto-Position	Peak Search, Next Peak (Right/Left), Peak Threshold %, Set Marker to Channel, Marker Frequency to Center, Delta Marker to Span, Marker to Reference Level
Marker Table	1-6 markers frequency and amplitude, plus delta markers frequency offset and amplitude

### Limit Line Functions

Limit Lines	Upper/Lower, On/Off, Edit, Move, Envelope, Advanced, Limit Alarm, Default Limit
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Amplitude, Number of Points (41), Offset, Shape Square/Slope
Limit Line Advanced	Type (Absolute/Relative), Mirror, Save/Recall

### Frequency

Frequency Range	9 kHz to 32 GHz (tunable to 0 Hz), Preamp 100 kHz to 32 GHz
Tuning Resolution	1 Hz
Frequency Reference	Aging: ±1.0 ppm/10 years Accuracy: ±0.3 ppm (25 °C ±25 °C) + aging
Auto-sensing External Frequency Reference	1, 1.2288, 1.544, 2.048, 2.4576, 4.8, 4.9152, 5, 9.8304, 10, 13, 19.6608 MHz
Frequency Span	10 Hz to 32 GHz including zero span
Sweep Time	10 µs to 600 seconds in zero span
Sweep Time Accuracy	±2 % in zero span

### Bandwidth (Performance Sweep Mode)

Resolution Bandwidth (RBW)	1 Hz to 10 MHz in 1-3 sequence ±10 % (-3 dB bandwidth)
Video Bandwidth (VBW)	1 Hz to 10 MHz in 1-3 sequence (-3 dB bandwidth)
RBW with Quasi-Peak Detection	200 Hz, 9 kHz, 120 kHz (-6 dB bandwidth)
VBW with Quasi-Peak Detection	Auto VBW is On, RBW/VBW = 1

**Spectrum Analyzer**

(continued)

**Spectral Purity**

SSB Phase Noise at 1 GHz	-100 dBc/Hz @ 10 kHz offset from carrier (-104 dBc/Hz typical) -102 dBc/Hz @ 100 kHz offset from carrier (-107 dBc/Hz typical) -107 dBc/Hz @ 1 MHz offset from carrier (-114 dBc/Hz typical) -120 dBc/Hz @ 10 MHz offset from carrier (-129 dBc/Hz typical)
--------------------------	--

**Amplitude Ranges**

Dynamic Range	> 104 dB @ 2.4 GHz, 2/3 (TOI-DANL) in 1 Hz RBW
Measurement Range	DANL to +30 dBm
Display Range	1 to 15 dB/div in 1 dB steps, ten divisions displayed
Reference Level Range	-150 dBm to +30 dBm
Attenuator Resolution	0 to 65 dB, 5 dB steps
Amplitude Units	Log Scale Modes: dBm, dBV, dBmv, dB $\mu$ V Linear Scale Modes: nV, $\mu$ V, mV, V, kV, nW, $\mu$ W, mW, W, kW
Maximum Continuous Input	+30 dBm Peak, $\pm$ 50 VDC ( $\geq$ 10 dB Attn) +23 dBm Peak, $\pm$ 50 VDC (< 10 dB Attn) +13 dBm Peak, $\pm$ 50 VDC (Preamp On)

**Amplitude Accuracy** (single sine wave input < Ref level, and > DANL, auto attenuation, Performance Sweep Mode)

20 °C to 30 °C after 30 minute warm-up	Typical: $\pm$ 0.5 dB, 100 kHz to 32 GHz Maximum: $\pm$ 1.3 dB, 100 kHz to 13 GHz; Add $\pm$ 1.0 dB, 13 GHz to 32 GHz
-10 °C to 50 °C after 60 minute warm-up	Add $\pm$ 1.0 dB, 100 kHz to 32 GHz

**Displayed Average Noise Level (DANL)** (RMS detection, VBW/Avg type = Log., Ref Level = -20 dBm for Preamp Off and -50 dBm for Preamp On, Performance Sweep Mode)

DANL in 1 Hz RBW, 0 dB attenuation	Preamp Off	Preamp On
10 MHz to 4 GHz	-141 dBm	-160 dBm
> 4 GHz to 9 GHz	-134 dBm	-156 dBm
> 9 GHz to 13 GHz	-129 dBm	-152 dBm
> 13 GHz to 20 GHz	-123 dBm	-145 dBm
> 20 to 32 GHz	-134 dBm	-154 dBm

**Spurs** (0 dB input attenuation, Performance Sweep Mode)

Residual Spurs	Preamp Off (RF input terminated)	-90 dBm 9 kHz to 13 GHz -85 dBm 13 GHz to 20 GHz -80 dBm 20 GHz to 32 GHz
Input-Related Spurs	Preamp On (RF input terminated) (-30 dBm input, span < 1.7 GHz)	-100 dBm 1 MHz to 32 GHz -60 dBc, -70 dBc typical

**Third-Order Intercept (TOI)** (-20 dBm tones 100 kHz apart, -20 dBm Ref level, 0 dB input attenuation, Preamp Off)

2.4 GHz	+15 dBm
50 MHz to 20 GHz	+20 dBm typical
20 GHz to 32 GHz	+15 dBm typical

**P1dB**

< 4 GHz	+5 dBm typical
4 GHz to 20 GHz	+12 dBm typical
20 GHz to 32 GHz	+7 dBm typical

**Second Harmonic Distortion**

50 MHz	-54 dBc
< 4 GHz	-60 dBc typical
> 4 GHz	-75 dBc typical

**VSWR**

< 20 GHz	(> 10 dB input attenuation) 1:5:1 typical
> 20 GHz to 32 GHz	2:0:1 typical

 **Spectrum Analyzer**

(continued)

**Secure Data Option (Option 7)**

For highly secure data handling requirements, this software option prevents the storing of measurement setup or data information onto any internal file storage location. Instead, setup and measurement information is stored ONLY to the external USB memory location. A simple factory default reset prepares the Spectrum Master for transportation while the USB memory remains behind in the secure environment. The Spectrum Master cannot be switched between secure and non-secure operation by the user once configured for secure data operation.

**AM/FM/PM Demodulation Analyzer Option (Option 509)**

Spectrum Master comes with AM/FM/SSB audio demodulation standard. By adding Option 0509, the instrument becomes capable of measuring, analyzing, and displaying key modulation parameters of RF Spectrum, Audio Spectrum, Audio Waveform, and Demodulation Summary. The RF Spectrum View displays the spectrum analyzer with carrier power, frequency, and occupied BW. Audio Spectrum shows the demodulated audio spectrum along with the Rate, RMS deviation, Pk-Pk/2 deviation, SINAD, Total Harmonic Distortion (THD), and Distortion/Total. Each demodulation also includes an Audio Waveform oscilloscope display that shows the time-domain demodulated waveform. A summary display provides a list of all the RF and demodulation parameters.

 **GPS Receiver Option (option 31)**

Setup	On/Off, Antenna Voltage 3.3/5.0 V, GPS Info <b>Note:</b> Anritsu GPS antennas (2000-1528-R and 2000-1652-R) require 5 VDC
GPS Time/Location Indicator	Time, Latitude, Longitude, and Altitude on display Time, Latitude, Longitude, and Altitude with trace storage
High Frequency Accuracy when GPS Antenna is connected	Spectrum Analyzer, Interference Analyzer, Signal Analyzers $< \pm 25$ ppb with GPS On, 3 minutes after satellite lock in selected mode
GPS Lock – after antenna is disconnected	$< \pm 50$ ppb for 3 days, 0 °C to 50 °C ambient temperature
Connector	SMA, female

 **High Accuracy Power Meter (option 19, Requires external USB Power Sensor)****Setup Parameters**

Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale
Average	# of Running Averages, Max Hold
Zero/Cal	Zero On/Off, Cal Factor (Center Frequency, Signal Standard)
Limits	Limit On/Off, Limit Upper/Lower

Power Sensor Model	<b>PSN50</b>	<b>MA24104A/105A</b>	<b>MA24106A</b>	<b>MA24108/18/26A</b>
<b>Description</b>	High Accuracy RF Power Sensor	Inline High/Peak Power Sensor	High Accuracy RF Power Sensor	Microwave USB Power Sensor
<b>Frequency Range</b>	50 MHz to 6 GHz	600 MHz to 4 GHz <b>(MA24104A)</b> 350 MHz to 4 GHz <b>(MA24105A)</b>	50 MHz to 6 GHz	10 MHz to 8 GHz <b>(MA24108A)</b> 10 MHz to 18 GHz <b>(MA24118A)</b> 10 MHz to 26 GHz <b>(MA24126A)</b>
<b>Connector</b>	Type N(m), 50 Ω	Type N(f), 50 Ω <b>(MA24104A)</b> Type N(f), 50 Ω <b>(MA24105A)</b>	Type N(m), 50 Ω	Type N(m), 50 Ω <b>(MA24108/18A)</b> Type K(m), 50 Ω <b>(MA24126A)</b>
<b>Dynamic Range</b>	-30 dBm to +20 dBm (0.001 mW to 100 mW)	+3 dBm to +51.76 dBm (2 mW to 150 W)	-40 dBm to +23 dBm (0.1 μW to 200 mW)	-40 dBm to +20 dBm (0.1 μW to 100 mW)
<b>VBW</b>	100 Hz	100 Hz	100 Hz	50 kHz
<b>Measurands</b>	True-RMS	True-RMS	True-RMS	True-RMS, Slot Power, Burst Average Power
<b>Measurement Uncertainty</b>	±0.16 dB <sup>1</sup>	±0.17 dB <sup>2</sup>	±0.16 dB <sup>1</sup>	±0.18 dB <sup>3</sup>
<b>Datasheet (for complete specifications)</b>	11410-00414	11410-00483 <b>(MA24104A)</b> 11410-00621 <b>(MA24105A)</b>	11410-00424	11410-00504
<b>Notes:</b>	<ol style="list-style-type: none"> <li>Total RSS measurement uncertainty (0 °C to 50 °C) for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.</li> <li>Expanded uncertainty with K=2 for power measurements of a CW signal greater than +20 dBm with a matched load. Measurement results referenced to the input side of the sensor.</li> <li>Expanded uncertainty with K=2 for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.</li> </ol>			


**Coverage Mapping (Option 431)**
**Measurements**

Indoor Mapping	RSSI, ACPR
Outdoor Mapping	RSSI, ACPR

**Setup Parameters**

Frequency	Center/Start/Stop, Span, Freq Step, Signal Standard, Channel #, Channel Increment
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
BW	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/VBW
Measurement Setup	ACPR, RSSI
Point Distance / Time Setup	Repeat Type Time Distance
Save Points Map	Save KML, JPEG, Tab Delimited
Recall Points Map	Recall Map, Recall KML Points only, Recall KML Points with Map, Recall Default Grid


**I/Q Waveform Capture (option 24, Requires option 9)**
**General**

Mode	Spectrum Analyzer
Capture Mode	Single or Continuous
Trigger	Free Run, External (Rising/Falling), Delay
Maximum Capture Length	800 ms
Maximum Sample Rate	40 MHz
Maximum Signal Bandwidth	32 MHz


**Interference Analyzer (Option 25)**
**Measurements**

Spectrum	Field Strength Occupied Bandwidth Channel Power Adjacent Channel Power (ACPR) AM/FM/SSB Demodulation (Wide/Narrow FM, Upper/Lower SSB), (audio out only) Carrier-to-Interference ratio (C/I)
Spectrogram	Collect data up to 72 hours
Signal Strength	Gives visual and aural indication of signal strength
Received Signal Strength Indicator (RSSI)	Collect data up to one week Gives visual and aural indication of signal strength
Signal ID	up to 12 signals Center Frequency Bandwidth Signal Type (FM, GSM, W-CDMA, CDMA, Wi-Fi only) Closest Channel Number Number of Carriers Signal-to-Noise Ratio (SNR) > 10 dB
Interference Mapping	Save current point location and direction Save/Recall points/map Delete last saved point Delete all points Speaker on/off Volume Reset Max/Min hold
Application Options	Impedance (50 Ω, 75 Ω, Other)


**Channel Scanner (option 27)**
**General**

Number of Channels	1 to 20 Channels (Power Levels)
Measurements	Graph/Table, Max Hold (On/5 sec/Off), Frequency/Channel, Current/Maximum, Dual Color
Scanner	Scan Channels, Scan Frequencies, Scan Custom List, Scan Script Master™
Amplitude	Reference Level, Scale
Custom Scan	Signal Standard, Channel, # of Channels, Channel Step Size, Custom Scan
Frequency Range	9 kHz to 32 GHz
Frequency Accuracy	±10 Hz + Time base error
Measurement Range	-110 dBm to +30 dBm
Application Options	Impedance (50 Ω, 75 Ω, Other)

 **Gated Sweep (option 90)****General**

Mode	Spectrum Analyzer, Sweep
Trigger	External TTL
Setup	Gated Sweep (On/Off) Gate Polarity (Rising, Falling) Gate Delay (0 ms to 65 ms typical) Gate Length (1 µs to 65 ms typical) Zero Span Time

 **Zero Span IF Output (option 89)****General**

Mode	Spectrum Analyzer/Span/Zero Span
IF Frequency	140 MHz
Output Level	-40 dBm to -20 dBm typical
Reference Level	-43 dBm to +30 dBm (Preamp Off) -60 dBm to -40 dBm (Preamp On)
IF Bandwidths	Up to 30 MHz (3 dB bandwidth)
RF Attenuation	Auto
Connector	BNC female

 **GSM/EDGE Signal Analyzers (Options 40, 41)****Measurements**

RF (option 40)	Demodulation (option 41)	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum -Channel Power -Occupied Bandwidth -Burst Power -Average Burst Power -Frequency Error -Modulation Type -BSIC (NCC, BCC) Multi-channel Spectrum Power vs. Time (Frame/Slot) -Channel Power -Occupied Bandwidth -Burst Power -Average Burst Power -Frequency Error -Modulation Type -BSIC (NCC, BCC)	Phase Error EVM Origin Offset C/I Modulation Type Magnitude Error BSIC (NCC, BCC)	RF Measurements and Demodulation can be made OTA. There are no additional OTA Measurements.	Measurements -Channel Power -Occupied Bandwidth -Burst Power -Average Burst power -Frequency Error -Phase Error -EVM -Origin Offset -C/I -Magnitude Error Script Master™

**Setup Parameters**

GSM/EDGE Select	Auto, GSM, EDGE
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screen	Overall Measurements

**RF Measurements**

Frequency Error	±10 Hz + time base error, 99% confidence level
Occupied Bandwidth	Bandwidth within which 99% of the power transmitted on a single channel lies
Burst Power Error	±1.5 dB, ±1 dB typical, (-50 dBm to +20 dBm)

**Demodulation**

GSMK Modulation Quality (RMS Phase)	(option 41)
Measurement Accuracy	±1 deg
Residual Error (GSMK)	1 deg
8 PSK Modulation Quality (EVM)	±1.5%
Measurement Accuracy	±1.5%
Residual Error (8 PSK)	2.5%

 **W-CDMA/HSPA+ Signal Analyzers (Options 44, 65, 35)**
**Measurements**

<b>RF (option 44)</b>	<b>Demodulation (option 65)</b>	<b>Over-the-Air (OTA) (option 35)</b>	<b>Pass/Fail (User Editable)</b>
Band Spectrum Channel Spectrum -Channel Power -Occupied Bandwidth -Peak-to-Average Power Spectral Emission Mask Single carrier ACLR Multi-carrier ACLR RF Summary	Code Domain Power Graph -P-CPICH Power -Channel Power -Noise Floor -EVM -Carrier Feed Through -Peak Code Domain Error -Carrier Frequency -Frequency Error -Control Channel Power -Abs/Rel/Delta Power -CPICH, P-CCPCH -S-CCPCH, PICH -P-SCH, S-SCH HSPA+ -Power vs. Time -Constellation Code Domain Power Table -Code, Status -EVM, Modulation Type -Power, Code Utilization -Power Amplifier Capacity Codogram Modulation Summary	Scrambling Code Scanner (Six) -Scrambling Codes -CPICH -Ec/Io -Ec -Pilot Dominance -OTA Total Power Multipath Scanner (Six) -Six Multipaths -Tau -Distance -RSCP -Relative Power -Multipath Power	Measurements Max Output Power Frequency Error EVM CPICH Occupied Bandwidth Spectral Mask ACLR PCDE P-CCPCH S-CCPCH Code Spread 3 PICH Code 128 Script Master™ Test Models -1 (16), (32), (64) -2 -3 (16), (32) -4 (+CPICH), (-CIPCH) -5 (2 HS), (4 HS), (8 HS)

**Setup Parameters**

Scrambling Code, Threshold	Auto, Manual
User Selectable	Scrambling Code, S-CCPCH Spread, S-CCPCH Code, PICH Code, Threshold, Max Amp Power, CPICH Power, Frequency Error Average
Maximum Spreading Factor	256, 512
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Marker	Six Markers, Table On/Off
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

**RF Measurements**

RF Channel Power Accuracy	±1.25 dB, ±0.7 dB typical, (temperature range 15 °C to 35 °C)
Occupied Bandwidth Accuracy	±100 kHz
Adjacent Channel Leakage Ratio (ACLR)	-54 dB/-59 dB ±0.8 dB @ 5 MHz/10 MHz offset, typical, Bands I to VI, VIII to XIV, XVII -54 dB/-57 dB ±1.0 dB @ 5 MHz/10 MHz offset, typical, Band VII

**Demodulation**

W-CDMA Modulations	(option 65) QPSK, QPSK-DTX (Codecs: AMR 4.75, 5.9, 7.4, 12.2 kbps, DTX 7.4, 12.2 kbps)
HSPA+ Modulations	QPSK, 16 QAM, 64 QAM
EVM Accuracy	±2.5%, 6% ≤ EVM ≤ 25%
Residual EVM	2.5% typical
Code Domain Power	±0.5 dB for code channel power > -25 dB, 16, 32, 64 DCPH (test model 1), 16, 32 DCPH (test model 2, 3)
CPICH (dBm) Accuracy	±0.8 dB typical

**Over-the-Air (OTA) Measurements** (option 35)

Scrambling Code Scanner	Six strongest Scrambling Codes
Multipath Scanner	Multipath power of six signals relative to strongest pilot



## CDMA Signal Analyzers (option 42, 43, 33)

## Measurements

RF (option 42)	Demodulation (option 43)	Over-the-Air (OTA) (Option 33)	Pass/Fail (User Editable)
Channel Spectrum -Channel Power -Occupied Bandwidth -Peak-to-Average Power Spectral Emission Mask Multi-carrier ACPR RF Summary	Code Domain Power Graph -Pilot Power -Channel Power -Noise Floor -Rho -Carrier Feed Through -Tau -RMS Phase Error -Frequency Error -Abs/Rel/ Power -Pilot -Page -Sync -Q Page Code Domain Power Table -Code -Status -Power -Multiple Codes -Code Utilization Modulation Summary	Pilot Scanner (Nine) -PN -Ec/Io -Tau -Pilot Power -Channel Power -Pilot Dominance Multipath Scanner (Six) -Ec/Io -Tau -Channel Power -Multipath Power Limit Test – 10 Tests Averaged -Rho -Adjusted Rho -Multipath -Pilot Dominance -Pilot Power -Pass/Fail Status	Measurements Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Mask Test Frequency Error Channel Frequency Frequency error Pilot Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Code Utilization Measured PN Pilot Dominance Multipath Power

## Setup Parameters

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Number of Carriers	1 to 5
Carrier Bandwidth	1.23 MHz, 1.24 MHz, 1.25 MHz
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

## RF Measurements

(option 42)

RF Channel Power Accuracy  $\pm 1.5 \text{ dB}$ ,  $\pm 1.0 \text{ dB}$  typical, (RF input  $-50 \text{ dBm}$  to  $+20 \text{ dBm}$ )

## Demodulation

(option 43)

Frequency Error  $\pm 10 \text{ Hz} + \text{time base error}$ , 99% confidence level (in slow mode)Rho Accuracy  $\pm 0.005$ , for Rho  $> 0.9$ Residual Rho  $> 0.995$ , typical,  $> 0.99$  maximum, (RF input  $-50 \text{ dBm}$  to  $+20 \text{ dBm}$ )PN Offset  $1 \times 64 \text{ chips}$ Pilot Power Accuracy  $\pm 1.0 \text{ dB}$  typical, relative to channel powerTau  $\pm 0.5 \mu\text{s}$  typical,  $\pm 1.0 \mu\text{s}$  maximum

## Over-the-Air (OTA) Measurements (option 33)

Pilot Scanner Nine strongest pilots

Multipath Scanner Multipath power of six signals relative to strongest pilot

Limit Test Average of ten tests compared to limit

 **EV-DO Signal Analyzers (option 62, 63, 34)**
**Measurements**

<b>RF (option 62)</b>	<b>Demodulation (option 63)</b>	<b>Over-the-Air (OTA) (option 34)</b>	<b>Pass/Fail (User Editable)</b>
Channel Spectrum -Channel Power -Occupied Bandwidth -Peak-to-Average Power Power vs. Time -Pilot & MAC Power -Channel Power -Frequency Error -Idle Activity -On/Off Ratio Spectral Emission Mask Multi-carrier ACPR RF Summary	MAC Code Domain Power Graph -Pilot & MAC Power -Channel Power -Frequency Error -Rho Pilot -Rho Overall -Data Modulation -Noise Floor MAC Code Domain Power Table -Code -Status -Power -Code Utilization Data Code Domain Power -Active Data Power -Data Modulation -Rho Pilot -Rho Overall -Maximum Data CDP -Minimum Data CDP Modulation Summary	Pilot Scanner (Nine) -PN -Ec/Io -Tau -Pilot Power -Channel Power -Pilot Dominance Multipath Scanner (Six) -Ec/Io -Tau -Channel Power -Multipath Power	Measurements -Channel Power -Occupied Bandwidth -Peak-to-Average Power -Carrier Frequency -Frequency Error -Spectral Mask -Noise Floor -Pilot Power -RMS Phase Error -Tau -Code Utilization -Measured PN -Pilot Dominance -Multipath Power

**Setup Parameters**

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement	Speed Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Slot Type	Auto, Active, Idle
Number of Carriers	1 to 5
Carrier Bandwidth	1.23 MHz, 1.24 MHz, 1.25 MHz
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

**RF Measurements**

RF Channel Power Accuracy	±1.5 dB, ±1.0 dB typical, (RF input –50 dBm to +20 dBm)
---------------------------	---

**Demodulation**

(option 63)	
EV-DO Compatibility	Rev 0 and Rev A
Frequency Error	±20 Hz + time base error, 99% confidence level
Rho Accuracy	±0.01, for Rho > 0.9
Residual Rho	> 0.995 typical, > 0.99, maximum (RF input –50 dBm to +20 dBm)
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	±1.0 dB typical, relative to channel power
Tau	±0.5 µs typical, ±1.0 µs maximum

**Over-the-Air (OTA) Measurements** (option 34)

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot

 **LTE Signal Analyzers (Options 541, 542, 543, 546)**
**Measurements**

<b>RF (option 541)</b>	<b>Modulation (option 0542)</b>	<b>Over-the-Air (OTA) (option 546)</b>	<b>Pass/Fail (User Editable)</b>
Channel Spectrum -Channel Power -Occupied Bandwidth ACPR Spectral Emission Mask -Category A or B (Opt 1) RF Summary	Power vs. Resource Block (RB) -RB Power (PDSCH) -Active RBs, Utilization % -Channel Power, Cell ID -OSTP, Frame EVM by modulation Constellation -QPSK, 16 QAM, 64 QAM -Modulation Results -Ref Signal Power (RS) -Sync Signal Power (SS) -EVM – rms, peak, max hold -Frequency Error – Hz, ppm -Carrier Frequency -Cell ID Control Channel Power -Bar Graph or Table View -RS, P-SS, S-SS -PBCH, PCFICH, PHICH, PDCCH -Total Power (Table View) -EVM Tx Time Alignment Modulation Summary -Includes EVM by modulation Antenna Icons -Detects active antennas (1 or 2)	Scanner -Cell ID (Group, Sector) -S-SS Power, RSRP, RSRQ, SINR -Dominance -Modulation Results – On/Off Tx Test -Scanner -RS Power of MIMO antennas -Cell ID, Average Power -Delta Power (Max-Min) -Graph of Antenna Power -Modulation Results – On/Off Mapping -On-screen -S-SS Power, RSRP, RSRQ, or SINR	View Pass/Fail Limits -All, RF, Modulation  Available Measurements -Channel Power -Occupied Bandwidth -ACLR -Frequency Error -Carrier Frequency -Dominance -EVM peak, rms -RS Power, EVM -SS, P-SS, S-SS Power, EVM -PBCH Power, EVM -PCFICH Power, EVM -PHICH Power, EVM -PDCCH Power, EVM -Cell, Group, Sector ID -OSTP -Tx Time Alignment

**Setup Parameters**

Frequency	E-UTRA bands 1 - 5, 7 - 14, 17 - 21, 23 - 25 (tunable 10 MHz to 4.0 GHz) Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Bandwidth	1.4, 3, 5, 10, 15, 20 MHz (15, 20 MHz requires option 0543)
Span	Auto, 1.4, 3, 5, 10, 15, 20, 30 MHz
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
EVM Mode	Auto, PBCH only, Max Hold
Save/Recall	Setup, Measurement, JPEG (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements
<b>RF Measurements</b>	
RF Channel Power Accuracy	±1.5 dB, ±1.0 dB typical, (RF input –50 dBm to +10 dBm)
<b>Modulation Measurements</b>	
RS Power Accuracy	±1.0 dB typical, (RF input –50 dBm to +10 dBm)
Frequency Error	±10 Hz + time base error, 99% confidence level
Residual EVM (rms)	2.0% typical (E-UTRA Test Model 3.1, RF Input –50 dBm to +10 dBm)
<b>BW = 15 MHz, 20 MHz</b>	
Bandwidths	15 MHz, 20 MHz

**Over-the-Air (OTA) Measurements** (option 546)

Scanner	Six strongest signals if present Auto Save – Sync Signal power and Modulation Results with GPS Information
Tx Test	Scanner – three strongest signals if present RS Power – strongest signal
Mapping	Map On-screen S-SS Power, RSRP, RSRQ, or SINR of Cell ID with strongest signal Scanner – three strongest signals if present Save and Export Mapping data: *.kml, *.mtd (tab delimited)

 TD-LTE Signal Analyzers (Options 551, 552, 543, 556)

## Measurements

RF (option 551)	Modulation (option 552)	Over-the-Air (OTA) (option 556)	Pass/Fail (User Editable)
Channel Spectrum -Channel Power -Occupied Bandwidth Power vs. Time -Frame View -Sub-Frame View -Total Frame Power -DwPTS Power -Transmit Off Power -Cell ID -Timing Error ACLR Spectral Emission Mask -Category A or B (Opt 1) RF Summary	Power vs. Resource Block (RB) -RB Power (PDSCH) -Active RBs, Utilization % -Channel Power, Cell ID Constellation -QPSK, 16 QAM, 64 QAM -Modulation Results -Ref Signal Power (RS) -Sync Signal Power (SS) -EVM – rms, peak, max hold -Frequency Error – Hz, ppm -Carrier Frequency -Cell ID Control Channel Power -Bar Graph or Table View -RS, P-SS, S-SS -PBCH, PCFICH -Total Power (Table View) -Modulation Results Modulation Summary Antenna Icons -Detects active antennas (1 or 2)	Scanner -Cell ID (Group, Sector) -S-SS Power, RSRP, RSRQ, SINR -Dominance -Modulation Results – On/Off Tx Test -Scanner -RS Power of MIMO antennas -Cell ID, Average Power -Delta Power (Max-Min) -Graph of Antenna Power -Modulation Results – On/Off Mapping -On-screen -S-SS Power, RSRP, RSRQ, or SINR	View Pass/Fail Limits -All, RF, Modulation  Available Measurements -Channel Power -Occupied Bandwidth -ACLR -Frequency Error -Carrier Frequency -Dominance -EVM peak, rms -RS Power -SS, P-SS, S-SS Power -PBCH Power -PCFICH Power -Cell, Group, Sector ID -Frame Power -DwPTS Power -Transmit Off Power -Timing Error

## Setup Parameters

Frequency	E-UTRA bands 33 - 43 (tunable 10 MHz to 4.0 GHz) Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Bandwidth	1.4, 3, 5, 10, 15, 20 MHz (15, 20 MHz requires option 0543)
Span	Auto, 1.4, 3, 5, 10, 15, 20, 30 MHz
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
EVM Mode	Auto, PBCH only, Max Hold
Trigger	No Trigger/Ext Trigger, Rising/Falling
Save/Recall	Setup, Measurement, JPEG (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

## RF Measurements

RF Channel Power Accuracy	(option 551) ± 1.5 dB, ± 1.0 dB typical, (RF input –30 dBm to +10 dBm)
---------------------------	---

## Modulation Measurements

RS Power Accuracy	(option 552) ± 1.0 dB typical, (RF input –30 dBm to +10 dBm)
Frequency Error	± 10 Hz + time base error, 99% confidence level
Residual EVM (rms)	2.0% typical (E-UTRA Test Model 3.1, RF Input –30 dBm to +10 dBm)

## BW = 15, 20 MHz

Bandwidths	(option 543) 15 MHz, 20 MHz
------------	--------------------------------

## Over-the-Air (OTA) Measurements (option 556)

Scanner	Six strongest signals if present Auto Save – Sync Signal power and Modulation Results with GPS Information
Tx Test	Scanner – three strongest signals if present RS Power – strongest signal
Mapping	Map On-screen S-SS Power, RSRP, RSRQ, or SINR of Cell ID with strongest signal Scanner – three strongest signals if present Save and Export Mapping data: *.kml, *.mtd (tab delimited)

**Fixed and Mobile WiMAX<sup>1</sup> Signal Analyzers (Options 46, 47, 66, 67, 37)****Measurements**

<b>RF (option 46 - Fixed) (option 66 - Mobile)</b>	<b>Demodulation (option 47 - Fixed) (option 67 - Mobile)</b>	<b>Over-the-Air (OTA) (option 37 - Mobile)</b>	<b>Pass/Fail (User Editable)</b>
Channel Spectrum -Channel Power -Occupied Bandwidth Power vs. Time -Channel Power -Preamble Power -Downlink Burst Power (Mobile) -Uplink Burst Power (Mobile) -Data Burst Power (Fixed) -Crest Factor (Fixed) ACPR RF Summary	Constellation -RCE (RMS/Peak) -EVM (RMS/Peak) -Frequency Error -CINR (Mobile) -Base Station ID -Sector ID (Mobile) Spectral Flatness -Adjacent Subcarrier Flatness EVM vs. Subcarrier/Symbol -RCE (RMS/Peak) -EVM (RMS/Peak) -Frequency Error -CINR (Mobile) -Base Station ID -Sector ID (Mobile) DL-MAP (Tree View) (Mobile) Modulation Summary	Channel Power Monitor Preamble Scanner (Six) -Preamble -Relative Power -Cell ID -Sector ID -PCINR -Dominant Preamble -Base Station ID	Pass Fail All Pass/Fail RF Pass Fail Demod Measurements Channel Power Occupied Bandwidth Downlink Bust Power Uplink Burst Power Preamble Power Crest Factor Frequency Error Carrier Frequency EVM RCE Sector ID (Mobile)

**Setup Parameters**

Fixed WiMAX Frequency Ranges	2.3 to 2.7 GHz, 3.3 to 3.8 GHz, 5.25 to 5.875 GHz
Mobile WiMAX Frequency Ranges	2.3 to 2.7 GHz, 3.3 to 3.8 GHz
Fixed WiMAX Bandwidth	1.25, 1.50, 2.50, 3.50, 5.00, 5.50, 6.00, 7.00, 10.00 MHz
Fixed WiMAX Cyclic Prefix Ratio (CP)	1/4, 1/8, 1/16, 1/32
Fixed WiMAX Span	5, 10, 15, 20 MHz
Fixed WiMAX Frame Length	2.5, 5.0, 10.0 msec
Mobile WiMAX Zone Type	PUSC
Mobile WiMAX DL-MAP Auto Decoding	Convolutional Coding (CC), Convolutional Turbo Coding (CTC)
Mobile WiMAX Bandwidths	3.50, 5.00, 7.00, 8.75, 10.00 MHz
Mobile WiMAX Cyclic Prefix Ratio (CP)	1/8
Mobile WiMAX Span	5, 10, 20, 30 MHz
Mobile WiMAX Frame Lengths	5, 10 msec
Mobile WiMAX Demodulation	Auto, Manual, FCH
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

**RF Measurements**

RF Channel Power Accuracy	(option 46 - Fixed, option 66 - Mobile)
	±1.5 dB, ±1.0 dB typical, (RF input –50 dBm to +20 dBm)

**Demodulated Signal Analyzer**

Frequency Error	(option 47 – Fixed, option 67 – Mobile)
	±10 Hz + time base error, 99% confidence level
Fixed WiMAX Residual EVM (rms)	3% typical, 3.5% maximum (RF Input –50 dBm to +20 dBm)
Mobile WiMAX Residual EVM (rms)	2.5% typical, 3.0% maximum, (RF Input –50 dBm to +20 dBm)

**Over-the-Air (OTA) Measurements (option 37)**

Channel Power Monitor	Over time (one week), measurement time interval 1 to 60 sec
Preamble Scanner	Six Strongest Preambles
Auto Save	Yes
GPS Tagging and Logging	Yes

1. Mobile WiMAX conforms to IEEE Std. 802.16e-2005, WiMAX Forum® Air Interface - Mobile System Profile - Release 1.0 Certified, System Profiles according to WMF-T24-001-R010v07.

 TD-SCDMA/HSPA+ Signal Analyzers (Options 60, 61, 38)
**Measurements**

RF Measurements (Option 60)	Demodulation (Option 61)	Over-the-Air (OTA) (Option 38)	Pass/Fail (User Editable)
Channel Spectrum -Channel Power -Occupied Bandwidth -Left Channel Power -Left Channel Occ B/W -Right Channel Power -Right Channel Occ B/W Power vs. Time -Six Slot Powers -Channel Power (RRC) -DL-UL Delta Power -UpPTS Power -DwPTS Power -On/Off Ratio -Slot Peak-to-Average Power Spectral Emission RF Summary	Code Domain Power/Error -(QPSK/8 PSK/16 QAM) -Slot Power -DwPTS Power -Noise Floor -Frequency Error -Tau -Scrambling Code -EVM -Peak EVM -Peak Code Domain Error -CDP Marker Modulation Summary	Code Scan (32) -Scrambling Code Group -Tau -Ec/Io -Pilot Dominance Tau Scan (Six) -Sync-DL# -Tau -Ec/Io -DwPTS Power -Pilot Dominance Record Run/Hold	Pass Fail All Pass/Fail RF Pass Fail Demod Measurements -Occupied Bandwidth -Channel Power -Channel Power RCC -On/Off Ratio -Peak-to-Average Ratio -Frequency Error -EVM -Peak EVM -Peak Code Domain Error -Tau -Carrier Feedthrough -Noise Floor

**Setup Parameters**

Slot Selection	Auto, 0-6
Trigger	Trigger Type (No Trigger/GPS/External), External Trigger (Rising/Falling), Tau Offset
SYNC-DL Code	Auto, 0-31
Scrambling/Midamble Code	Auto, 0-127
Maximum Users	Auto, 2, 4, 6, 8, 10, 12, 14, 16
Measurement Speed	Fast, Normal, Slow
User Selectable	Uplink Switch Point, Number of Carriers (1, 3), Tau Offset
Demodulation Type	Auto, QPSK, 8 PSK, 16 QAM
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Hold/Run, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

**RF Measurements**

RF Channel Power Accuracy (RRC)	±1.5 dB, ±1.0 dB typical, (slot power –40 dBm to +10 dBm)
Frequency Error	±20 Hz + time base error, in the presence of a downlink slot

**Demodulation**

Supported Modulation	QPSK, 8 PSK, 16 QAM, MBMS
Residual EVM (rms)	3% typical, P-CCPH slot power > –50 dBm
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	±1.0 dB typical
Timing Error (Tau) for Dominant	±0.2 µs (external trigger)
SYNC-DL	1, 16
Spreading Factor	

**Over-the-Air (OTA) Measurements** (option 38)

Code Scanner	32 Sync Codes and associated Scrambling Code Groups
Tau Scanner	Six strongest Sync Codes
Auto Save	Yes
GPS Tagging and Logging	Yes

<b>General Specifications</b>	All specifications and characteristics apply under the following conditions, unless otherwise stated: 1) After 5 minutes of warm-up time, where the instrument is left in the ON state; 2) Apply when using internal reference and performance sweep mode; 3) Subject to change without notice; 4) Typical performance is the measured performance of an average unit; 5) Recommended calibration cycle is 12 months.
<b>Setup Parameters</b>	
System	Status (Temperature, Battery Info, S/N, Firmware Ver, IP Address, Options Installed) Self Test, Application Self Test GPS (see Option 0031)
System Options	Name, Date and Time, Ethernet Configuration, Display, Volume Display (Brightness, Default Colors, Black and White, Night Vision, High Contrast) Language (English, French, German, Spanish, Chinese, Japanese, Korean, Italian, Russian, User defined) Share Center Frequency and Power Offset between Modes Reset (Factory Defaults, Master Reset, Update Firmware)
File	Save, Recall, Delete, Directory Management
Save/Recall	Setups, Measurements, Screen Shots JPEG (save only)
Delete	Selected File, All Measurements, All Mode Files, All Content
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB, Copy, Format USB
Internal Trace/Setup Memory	> 13,000 traces
External Trace/Setup Memory	Limited by size of USB Flash drive
Mode Switching	Auto-Stores/Recalls most recently used Setup Parameters in the Mode
<b>Connectors</b>	
RF In	Type K, male, 50 Ω, Maximum Input +30 dBm, ±50 VDC
GPS	SMA Female
External Power	5.5 mm barrel connector, 12 to 15 VDC, < 5.0 Amps
LAN Connection	RJ48C, 10/100 Mbps, Connect to PC or LAN for Remote Access
USB Interface (2)	Type A, Connect Flash Drive and Power Sensor
USB Interface	5-pin mini-B, Connect to PC for data transfer
Headset Jack	2.5 mm 3-wire headset jack
External Reference In	BNC, female, 50 Ω, Maximum Input -10 dBm to +10 dBm
External Reference Out	BNC, female, 50 Ω, 10 MHz
External Trigger	BNC, female, 50 Ω, Maximum Input ±5 VDC
IF Out	BNC, female, 50 Ω, 140 MHz
<b>Display</b>	
Size	8.4 in
Resolution	800 x 600
<b>Battery</b>	
Type	Li-Ion
Battery Operation	2.5 hours, typical
<b>Electromagnetic Compatibility</b>	
European Union	CE Mark, EMC Directive 89/336/EEC, 92/31/EEC, 93/68/EEC and Low Voltage Directive 73/23/EEC, 93/68/EEC
Australia and New Zealand	C-tick N274
Interference	EN 61326-1
Emissions	EN 55011
Immunity	EN 61000-4-2/-3/-4/-5/-6/-11
<b>Safety</b>	
Safety Class	EN 61010-1 Class 1
Product Safety	IEC 60950-1 when used with Company supplied Power Supply
<b>Environmental</b>	
Operating Temperature	-10 °C to +55 °C
Maximum Humidity	85 %
Shock	MIL-PRF-28800F Class 2
Storage	-51 °C to +71 °C
Altitude	4600 meters, operating and non-operating
<b>Size and Weight</b>	
Size	315 mm x 211 mm x 77 mm, (12.4 in x 8.3 in x 3.0 in)
Weight	3.8 kg, (8.5 lb)

 **Master Software Tools (for your PC)**
**Database Management**

Full Trace Retrieval	Retrieve all traces from instrument into one PC directory
Trace Catalog	Index all traces into one catalog
Trace Rename Utility	Rename measurement traces
Group Edit	Titles, subtitles, plot scaling, markers and limit lines, simultaneously on similar files
DAT File Converter	Converts HHST files to MST file format and vice-versa

**Data Analysis**

Trace Math and Smoothing	Compare multiple traces
Data Converter	Convert from/to Return Loss/ VSWR/ Cable Loss/ DTF and also into Smith Charts
Measurement Calculator	Translates into other units

**Report Generation**

Report Generator	Includes GPS, power level, and calibration status along with measurements
Edit Graph	Change scale, limit lines, and markers
Report Format	Create reports in HTML for PDF format
Export Measurements	Export measurements to *.s2p, *.jpg or *.csv format
Notes	Annotate measurements

**Mapping (GPS Required)**

Spectrum Analyzer Mode	MapInfo, MapPoint
Mobile WiMAX OTA Option	Google Earth, Google Maps, MapInfo

**Folder Spectrogram**

Folder Spectrogram – 2D View	(Spectrum Monitoring for Interference Analysis and Spectrum Clearing) Creates a composite file of multiple traces Peak Power, Total Power, Peak Frequency, Histogram, Average Power (Max/Min) File Filter (Violations over limit lines or deviations from averages) Playback
Video Folder Spectrogram – 2D View	Create AVI file to export for management review/reports
Folder Spectrogram – 3D View	Views (Set Threshold, Markers) - 3D (Rotate X, Y, Z Axis, Level Scale, Signal ID) - 2D View (Frequency or Time Domain, Signal ID) - Top Down Playback (Frequency and/or Time Domain)

**List/Parameter Editors**

Traces	Add, delete, and modify limit lines and markers
Antennas, Cables, Signal Standards	Modify instrument's Antenna, Cable, and Signal Standard List
Product Updates	Auto-checks Anritsu Web site for latest revision firmware
Firmware Upload	Upload new firmware into the instrument
Pass/Fail	Create, download, or edit Signal Analysis Pass/Fail Limits
VSG Pattern Converter	Import user-defined patterns (ASCII text or MATLAB file format required)
Languages	Add up to two languages or modify non-English language menus
Mobile WiMAX	DL-MAP Parameters
Display	Modify display settings

**Script Master™**

Channel Scanner Mode	Automate scan up to 1200 channels, repeat for sets of 20 channels, repeat all channels
GSM/GPRS/EDGE or W-CDMA/HSPA+ Mode	Automate Signal Analysis testing requirements with annotated how-to pictures

**Connectivity**

Connections	Connect to PC using USB, LAN, or Direct Ethernet connection
Download	Download measurements and live traces to PC for storage and analysis
Upload	Upload measurements from PC to instrument
Firmware Updates	Product Update: download latest firmware version
Remote Access Tool	Remote control and monitoring of instrument (via Ethernet port) over the Internet

**Ordering Information**

<b>MS2725C</b>	<b>Description</b>
	9 kHz to 32 GHz Spectrum Analyzer
<b>Options</b>	
	MS2725C-0007 Secure Data Operation
	MS2725C-0019 High-Accuracy Power Meter (requires Power Sensor)
	MS2725C-0031 GPS Receiver (requires Antenna P/N 2000-1528-R or 2000-1652-R)
	MS2725C-0025 Interference Analyzer (recommend Option 0031)
	MS2725C-0027 Channel Scanner
	MS2725C-0089 Zero-Span IF Output
	MS2725C-0431 Coverage Mapping (requires Option 0031)
	MS2725C-0509 AM/FM/PM Analyzer
	MS2725C-0090 Gated Sweep
	MS2725C-0009 I/Q Demodulation Hardware
	MS2725C-0024 I/Q Waveform Capture <sup>a</sup>
	MS2725C-0040 GSM/EDGE RF Measurements <sup>a</sup>
	MS2725C-0041 GSM/EDGE Demodulation <sup>a</sup>
	MS2725C-0044 W-CDMA/HSPA+ RF Measurements <sup>a</sup>
	MS2725C-0065 W-CDMA/HSPA+ Demodulation <sup>a</sup>
	MS2725C-0035 W-CDMA/HSPA+ Over-the-Air (OTA) Measurements <sup>a</sup>
	MS2725C-0060 TD-SCDMA/HSPA+ Measurements <sup>a</sup>
	MS2725C-0061 TD-SCDMA/HSPA+ Demodulation <sup>a</sup>
	MS2725C-0038 TD-SCDMA/HSPA+ Over-the-Air (OTA) Measurements <sup>a</sup> (recommend Option 0031)
	MS2725C-0541 LTE RF Measurements <sup>a</sup>
	MS2725C-0542 LTE Modulation Measurements <sup>a</sup>
	MS2725C-0546 LTE Over-the-Air (OTA) Measurements <sup>a</sup> (recommend Option 0031)
	MS2725C-0543 15 MHz and 20 MHz LTE Modulation Measurements <sup>a</sup> (requires Option 0541, 0542, 0551 or 0552)
	MS2725C-0551 TD-LTE RF Measurements <sup>a</sup>
	MS2725C-0552 TD-LTE Modulation Measurements <sup>a</sup>
	MS2725C-0556 TD-LTE Over-the-Air (OTA) Measurements <sup>a</sup> (recommend Option 0031)
	MS2725C-0042 CDMA RF Measurements <sup>a</sup>
	MS2725C-0043 CDMA Demodulation <sup>a</sup>
	MS2725C-0033 CDMA Over-the-Air (OTA) Measurements <sup>b</sup>
	MS2725C-0062 EV-DO RF Measurements <sup>a</sup>
	MS2725C-0063 EV-DO Demodulation <sup>a</sup>
	MS2725C-0034 EV-DO Over-the-Air (OTA) Measurements <sup>b</sup>
	MS2725C-0046 Fixed WiMAX RF Measurements <sup>a</sup>
	MS2725C-0047 Fixed WiMAX Demodulation <sup>a</sup>
	MS2725C-0066 Mobile WiMAX RF Measurements <sup>a</sup>
	MS2725C-0067 Mobile WiMAX Demodulation <sup>a</sup>
	MS2725C-0037 Mobile WiMAX Over-the-Air (OTA) Measurements <sup>a</sup> (recommend Option 0031)
	MS2725C-0098 Standard Calibration (ANSI Z540-1-1994)
	MS2725C-0099 Premium Calibration (ANSI Z540-1-1994 plus test data)

a.Requires Option 0009

b.Requires Option 0009 and Option 0031

## **Power Sensors**


(For complete ordering information see the respective datasheets of each sensor)



<b>Part Number</b>	<b>Description</b>
PSN50	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +20 dBm
MA24105A	Inline Peak Power Sensor, 350 MHz to 4 GHz, +51.76 dBm
MA24106A	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +23 dBm
MA24108A	Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24118A	Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24126A	Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm

## **Manuals**


(soft copy included on Handheld Instruments Documentation Disc and at [www.anritsu.com](http://www.anritsu.com))

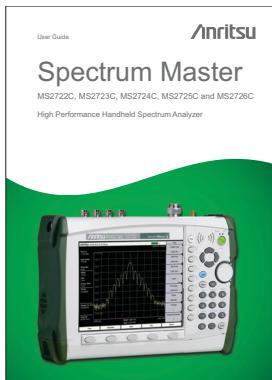

<b>Part Number</b>	<b>Description</b>
10920-00060	Handheld Instruments Documentation Disc (included)
10580-00277	Spectrum Master User Guide (Hard copy included), -GPS Receiver
10580-00244	Spectrum Analyzer Measurement Guide - Interference Analyzer, Channel Scanner, IF Output
10580-00240	Power Meter Measurement Guide - High Accuracy Power Meter
10580-00234	3GPP Signal Analyzer Measurement Guide - GSM/EDGE, W-CDMA/HSPA+, TD-SCDMA/HSPA+, LTE, TD-LTE
10580-00235	3GPP2 Signal Analyzer Measurement Guide - CDMA, EV-DO
10580-00236	WiMAX Signal Analyzer Measurement Guide - Fixed WiMAX, Mobile WiMAX
10580-00278	Spectrum Master Programming Manual
10580-00279	Spectrum Master Maintenance Manual

## Troubleshooting Guides

(soft copy at [www.anritsu.com](http://www.anritsu.com))

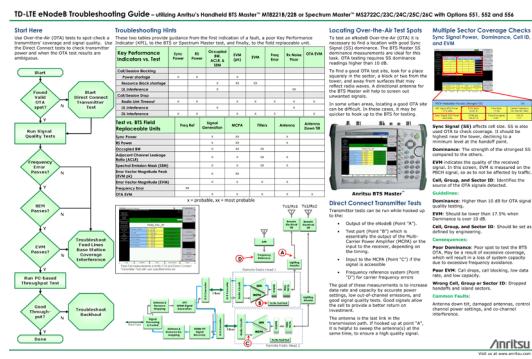

<b>Part Number</b>	<b>Description</b>
11410-00551	Spectrum Analyzers
11410-00472	Interference
11410-00466	GSM/GPRS/EDGE Base Stations
11410-00566	LTE eNodeB
11410-00615	TD-LTE eNodeB
11410-00463	W-CDMA/HSPA+ Base Stations
11410-00465	TD-SCDMA/HSPA+ Base Stations
11410-00467	cdmaOne/CDMA2000 1X Base Stations
11410-00468	CDMA2000 1xEV-DO Base Stations
11410-00470	Fixed WiMAX Base Stations
11410-00469	Mobile WiMAX Base Stations

**Standard Accessories**


(included with instrument)



<b>Part Number</b>	<b>Description</b>
10920-00060	Handheld Instruments Documentation Disc
10580-00277	Spectrum Master User Guide (includes GPS Receiver)
2300-498	Master Software Tools (MST) CD Disc
2000-1685-R	Soft Carrying Case
633-44	Rechargeable Li-Ion Battery
40-187-R	AC/DC Power Supply
806-141-R	Automotive Cigarette Lighter 12 Volt DC Adapter
2000-1371-R	Ethernet Cable, 7 feet/213 cm
3-2000-1498	USB A-mini B Cable, 10 feet/305 cm
11410-00526	MS2725C Spectrum Master Technical Data Sheet

One Year Warranty (Including battery, firmware, and software)

Certificate of Calibration and Conformance

**Optional Accessories****Directional Antennas**

<b>Part Number</b>	<b>Description</b>
2000-1411-R	824 MHz to 896 MHz, N(f), 10 dBd, Yagi
2000-1412-R	885 MHz to 975 MHz, N(f), 10 dBd, Yagi
2000-1413-R	1710 MHz to 1880 MHz, N(f), 10 dBd, Yagi
2000-1414-R	1850 MHz to 1990 MHz, N(f), 9.3 dBd, Yagi
2000-1415-R	2400 MHz to 2500 MHz, N(f), 10 dBd, Yagi
2000-1416-R	1920 MHz to 2170 MHz, N(f), 10 dBd, Yagi
2000-1659-R	698 MHz to 787 MHz, 8 dBd gain
2000-1660-R	1425 MHz to 1535 MHz, 12 dBd gain
2000-1617	600 MHz to 21 GHz, N(f), 5-8 dBi to 12 GHz, 0-6 dBi to 21 GHz, log periodic

**Portable Antennas**

<b>Part Number</b>	<b>Description</b>
2000-1200-R	806 MHz to 866 MHz, SMA(m), 50 Ω
2000-1473-R	870 MHz to 960 MHz, SMA(m), 50 Ω
2000-1035-R	896 MHz to 941 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1030-R	1710 MHz to 1880 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1474-R	1710 MHz to 1880 MHz with knuckle elbow (1/2 wave)
2000-1031-R	1850 MHz to 1990 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1475-R	1920 MHz to 1980 MHz and 2110 MHz to 2170 MHz, SMA(m), 50 Ω
2000-1032-R	2400 MHz to 2500 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1361-R	2400 MHz to 2500 MHz, 5000 MHz to 6000 MHz, SMA(m), 50 Ω
2000-1616	20 MHz to 21000 MHz, omnidirectional, N(f), 50 Ω
2000-1487	VHF/UHF, Telescopic Whip antenna, straight or 90°, BNC(m), 50 Ω
2000-1636-R	Antenna Kit (Consists of: 2000-1030-R, 2000-1031-R, 2000-1032-R, 2000-1200-R, 2000-1035-R, 2000-1361-R, and carrying pouch)

**Mag Mount Broadband Antenna****Part Number Description**

2000-1647-R	Cable 1: 698-1200 MHz 2 dBi peak gain, 1700-2700 MHz 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 2: 3000-6000 MHz 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 3: GPS 26 dB gain, SMA(m), 50 Ω, 10 ft, GPS dual voltage 3 VDC or 5 VDC
2000-1645-R	694-894 MHz 3 dBi peak gain, 1700-2700 MHz 3 dBi peak gain, N(m), 50 Ω, 10 ft
2000-1646-R	750-1250 MHz 3 dBi peak gain, 1650-2000 MHz 5 dBi peak gain, 2100-2700 MHz 3 dBi peak gain, N(m), 50 Ω, 10 ft
2000-1648-R	1700-6000 MHz 3 dBi peak gain, N(m), 50 Ω, 10 ft

**Bandpass Filters****Part Number Description**

1030-114-R	806 MHz to 869 MHz, N(m) to SMA(f), 50 Ω
1030-109-R	824 MHz to 849 MHz, N(m) to SMA(f), 50 Ω
1030-110-R	880 MHz to 915 MHz, N(m) to SMA(f), 50 Ω
1030-105-R	890 MHz to 915 MHz Band, 0.41 dB loss, N(m) to SMA(f), 50 Ω
1030-111-R	1850 MHz to 1910 MHz, N(m) to SMA(f), 50 Ω
1030-106-R	1710 MHz to 1790 MHz Band, 0.34 dB loss, N(m) to SMA(f), 50 Ω
1030-107-R	1910 MHz to 1990 MHz Band, 0.41 dB loss, N(m) to SMA(f), 50 Ω
1030-112-R	2400 MHz to 2484 MHz, N(m) to SMA(f), 50 Ω
1030-155-R	2500 MHz to 2700 MHz, N(m) to N(f), 50 Ω
1030-178-R	1920 MHz to 1980 MHz, N(m) to N(f), 50 Ω
1030-179-R	777 MHz to 787 MHz, N(m) to N(f), 50 Ω
1030-180-R	2500 MHz to 2570 MHz, N(m) to N(f), 50 Ω
2000-1684-R	791 MHz to 821 MHz, N(m) to N(f), 50 Ω

**Attenuators****Part Number Description**

3-1010-122	20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
42N50-20	20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
42N50A-30	30 dB, 50 W, DC to 18 GHz, N(m) to N(f)
3-1010-123	30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
1010-127-R	30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
3-1010-124	40 dB, 100 W, DC to 8.5 GHz, N(m) to N(f), Uni-directional
1010-121	40 dB, 100 W, DC to 18 GHz, N(m) to N(f), Uni-directional
1010-128-R	40 dB, 150 W, DC to 3 GHz, N(m) to N(f)

**Optional Accessories**

(continued)

**Adapters**

<b>Part Number</b>	<b>Description</b>
1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
1091-379-R	7/16 DIN(f) to 7/16 DIN(f), DC to 6 GHz, 50 Ω, w/ Reinforced Grip
71693-R	Ruggedized K(f) to Type N(f)
510-102-R	N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle

**Precision Adapters**

<b>Part Number</b>	<b>Description</b>
34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFNF50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω

**Miscellaneous Accessories**

<b>Part Number</b>	<b>Description</b>
2000-1528-R	GPS Antenna, SMA(m) with 15 ft cable requires 5 Vdc
2000-1652-R	GPS Antenna, SMA(m) with 1 foot cable, requires 5 Vdc
2000-1374	External Charger for Li-Ion Batteries
633-75	High Capacity Battery Pack, 7000 mAh
66864	Rack Mount Kit, Master Platform

**Backpack and Transit Case**

<b>Part Number</b>	<b>Description</b>
67135	Anritsu Backpack (For Handheld Instrument and PC)
760-243-R	Large Transit Case with Wheels and Handle









The Master Users Group is an organization dedicated to providing training, technical support, networking opportunities and links to Master product development teams. As a member you will receive the Insite Quarterly Newsletter with user stories, measurement tips, new product news and more.

Visit us to register today: [www.anritsu.com/MUG](http://www.anritsu.com/MUG)



To receive a quote to purchase a product or order accessories visit our online ordering site: [www.ShopAnritsu.com](http://www.ShopAnritsu.com)

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses visit: [www.anritsu.com/training](http://www.anritsu.com/training)



### • United States

#### Anritsu Company

1155 East Collins Blvd., Suite 100,  
Richardson, TX 75081, U.S.A.  
Toll Free: 1-800-267-4878  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

### • Canada

#### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120,  
Kanata, Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

#### Anritsu Electrônica Ltda.

Praca Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - São Paulo - SP - Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

#### Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada  
11520 México, D.F., México  
Phone: +52-55-1101-2370  
Fax: +52-55-5254-3147

### • United Kingdom

#### Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU,  
U.K.  
Phone: +44-1582-433280  
Fax: +44-1582-731303

### • France

#### Anritsu S.A.

12 Avenue du Québec,  
Bâtiment Iris 1-Silic 612,  
91140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

### • Germany

#### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49 (0) 89 442308-0  
Fax: +49-89-442308-55

### • Italy

#### Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

### • Sweden

#### Anritsu AB

Borgafjordsgatan 13A, 164 40 KISTA, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

### • Finland

#### Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

### • Denmark

#### Anritsu A/S (for Service Assurance)

#### Anritsu AB (for Test & Measurement)

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark  
Phone: +45-7211-2200  
Fax: +45-7211-2210

### • Russia

#### Anritsu EMEA Ltd.

#### Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.  
Russia, 125009, Moscow  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • United Arab Emirates

#### Anritsu EMEA Ltd.

#### Dubai Liaison Office

P O Box 500413 - Dubai Internet City  
Al Thuraya Building, Tower 1, Suite 701, 7th Floor  
Dubai, United Arab Emirates  
Phone: +971-4-3670352  
Fax: +971-4-3688460

### • Singapore

#### Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech  
(Lobby A)  
Singapore 118502  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • India

#### Anritsu Pte. Ltd.

#### India Branch Office

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,  
Indiranagar, 100ft Road, Bangalore - 560038, India  
Phone: +91-80-4058-1300  
Fax: +91-80-4058-1301

### • P.R. China (Shanghai)

#### Anritsu (China) Co., Ltd.

Room 1715, Tower A CITY CENTER of Shanghai,  
No.100 Zunyi Road, Chang Ning District,  
Shanghai 200051, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P. R. China (Hong Kong)

#### Anritsu Company Ltd.

Unit 1006-7, 10/F, Greenfield Tower,  
Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

#### Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi,  
Kanagawa, 243-0016 Japan  
Phone: +81-46-296-1221  
Fax: +81-46-296-1238

### • Korea

#### Anritsu Corporation, Ltd.

502, 5FL H-Square N B/D, 681  
Sampyeong-dong, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 463-400 Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

#### Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill  
Victoria, 3168, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

#### Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817



® Anritsu All trademarks are registered trademarks of their respective companies. Data subject to change without notice. For the most recent specifications visit: [www.anritsu.com](http://www.anritsu.com)  
Anritsu prints on recycled paper with vegetable soybean oil ink.

Spectrum Master™ TDS  
Copyright October 2012 Anritsu Company, USA  
All Rights Reserved



11410-00526



H