


MS4630B


Network Analyzer

10 Hz to 300 MHz

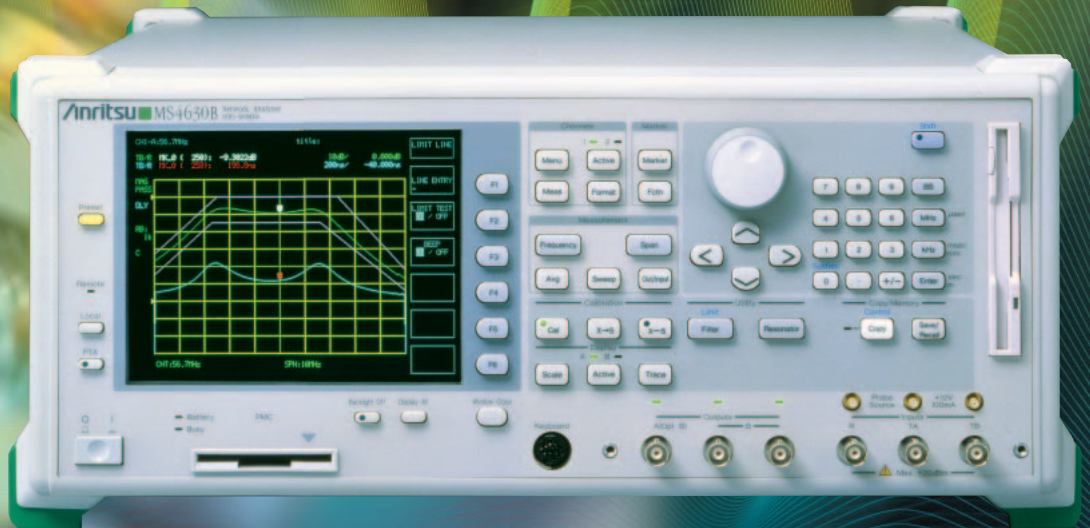


Maximum Production/Inspection Capacity

The MS4630B is targeted at production lines demanding fast and accurate measurements of electronic devices. It is perfect for accurate high-speed evaluation of IF filter resonance and group delay characteristics, as well as for evaluating the impedance characteristics of resonators in AV equipment and personal computers. High-speed synthesizer and DSP technologies offer speeds of 150 μ s per measurement point and post-processing data analysis functions have been strengthened by improved macros for greatly increased total production throughput. The dynamic range has been improved to 120 dB (RBW: 1 kHz). In addition, sweep conditions are easily set by adding the optional List Sweep function or by using PTA software. Weight has been dramatically cut, too.

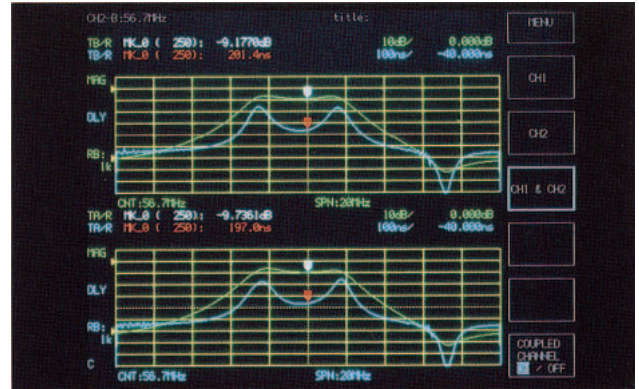

High dynamic range


The high dynamic range of 120 dB (RBW: 1 kHz) supports fast and accurate out-of-band measurement of filters.

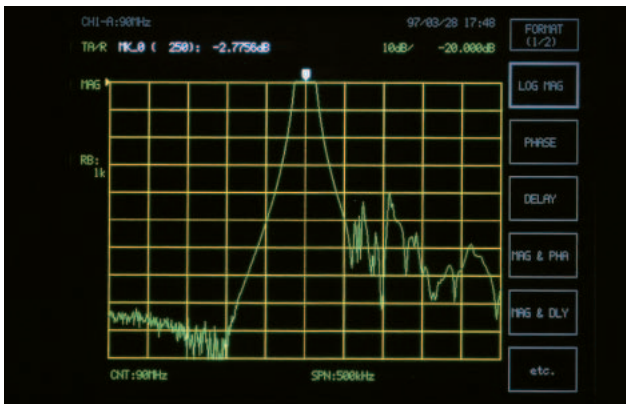

Filter out-of-band attenuation measurement

High-accuracy group delay measurement


Group delay characteristics can be measured with high accuracy at a resolution of 1/10,000 of the measurement range.

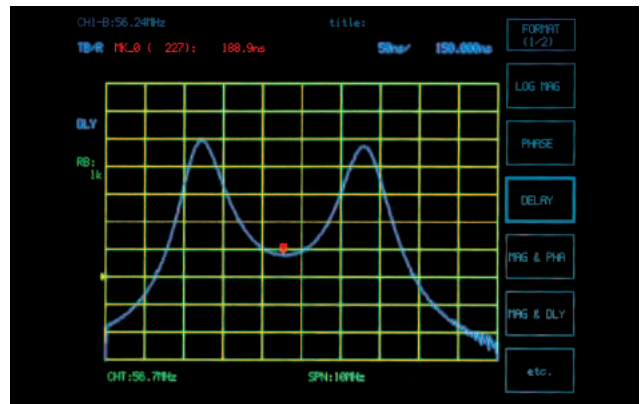

Group delay characteristics

Multi-markers


Up to 10 independent markers can be set for each channel. The marker list function displays all data at each marker as tables and waveforms simultaneously.

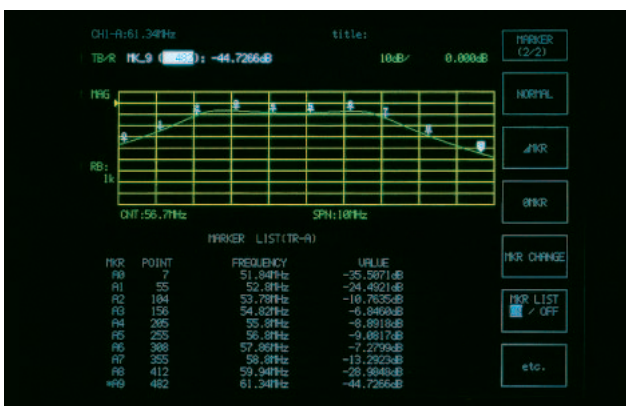

Multi-markers

Limit tests

Devices are pass/fail evaluated in real time using the single and segmented limit test functions.

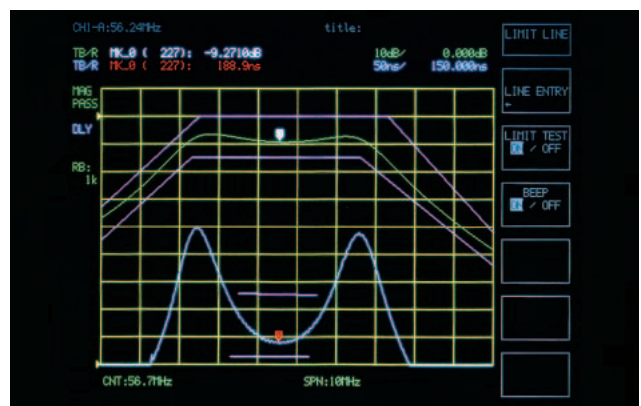


Filter pass/fail evaluation using limit test

Higher Productivity


Filters

• Analysis functions

Filter characteristics, such as 3-dB bandwidth, center frequency (fo), in-band ripple, out-of-band attenuation, etc., are processed digitally and analyzed at high speed. Users can easily enter or change default values by using the filter analysis setup menu. The frequency, output level, waiting time and RBW can be set at each measurement point to shorten filter measurement time.

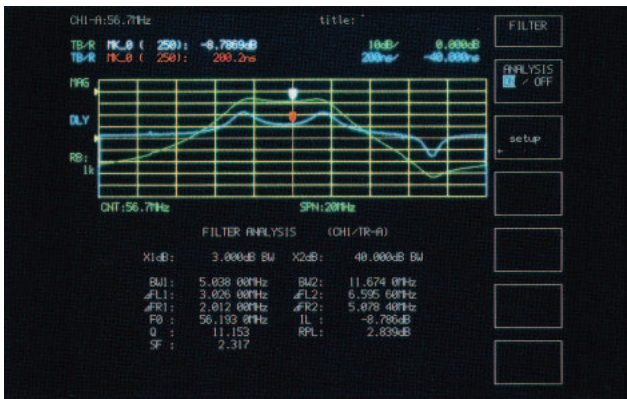

Filter analysis screen

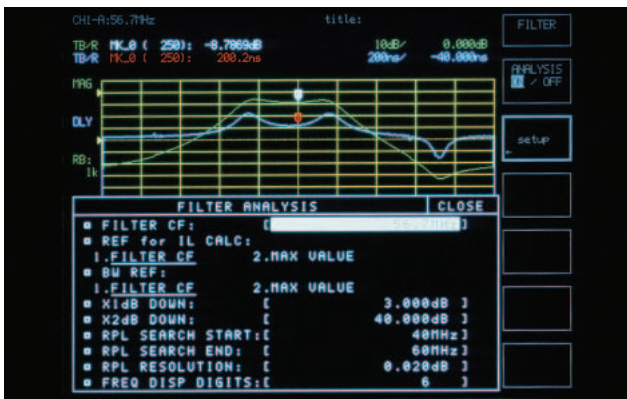


Filter analysis setup menu

• Improved measurement performance using Personal Test Automation (PTA)

Frequency/Level Setting: The frequency and power level at Port 1 are easily controlled for efficient in-band and out-of-band measurements.


Ripple Extraction: In addition to the normal min./max. ripple, four other functions, such as the SAW filter slope ripple, are built-in.

Filter Functions: These permit complex analyses, such as multiple bandwidth and out-of-band attenuation extraction and group delay measurement.

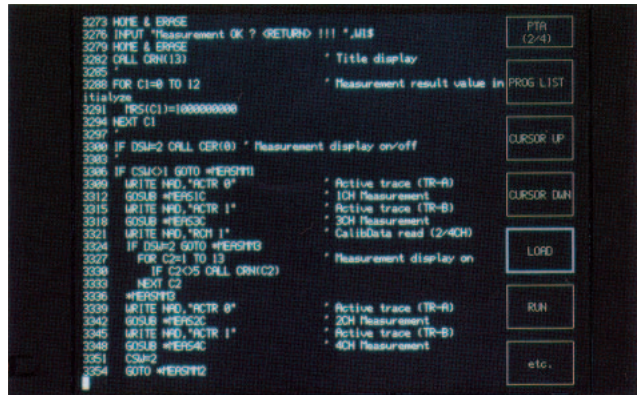

• Simultaneous in-band and spurious response data display

Previously, spurious detection and passband measurement required switching the measurement setup. However, the MS4630B alternate sweep function displays the measured passband and spurious data simultaneously. And the very short switching time greatly improves measurement efficiency.

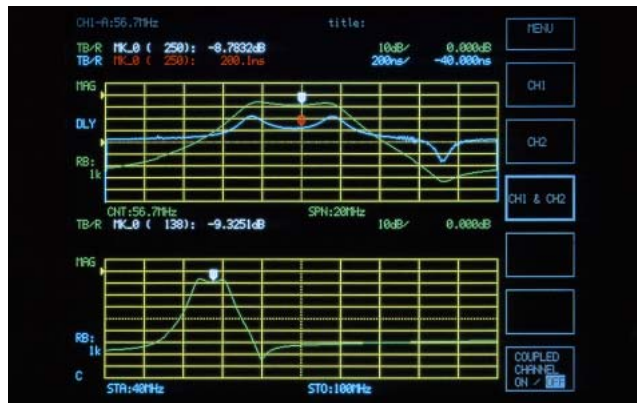

Spurious measurement using alternate sweeping

Resonators

- **High-speed measurement of characteristics**


The MS4630B has dedicated waveform analysis functions to improve the efficiency of resonator evaluation.

Resonator 1 analyzes the resonance frequency (F_r) and impedance (Z_r) while Resonator 2 adds measurement of resonator equivalence to the Resonator 1 measurements.


- **Measuring crystal resonators using π -network**

Crystal resonators can be tested easily by combining the MS4630B with a π -circuit jig like the MA1506A.


Floating admittance around the jig is eliminated using the MS4630B π -network calibration function and jig calibration standard, offering high-accuracy measurement.

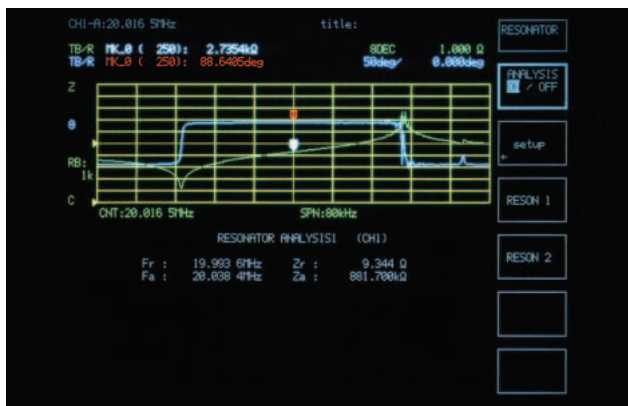


Resonator 1 measurements

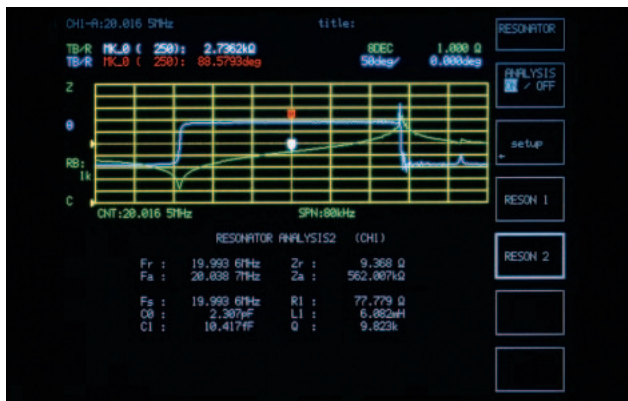

Resonator 2 measurements

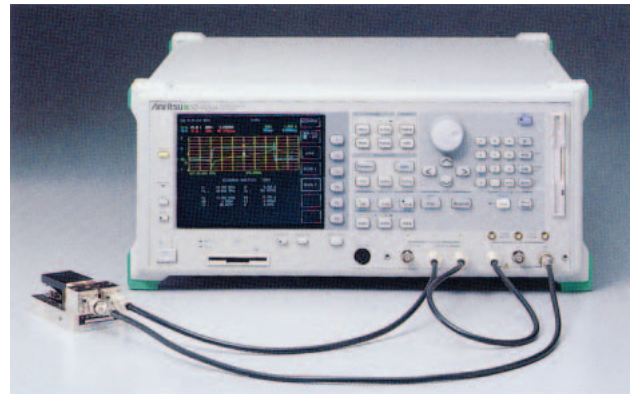


Measurement using π -Network

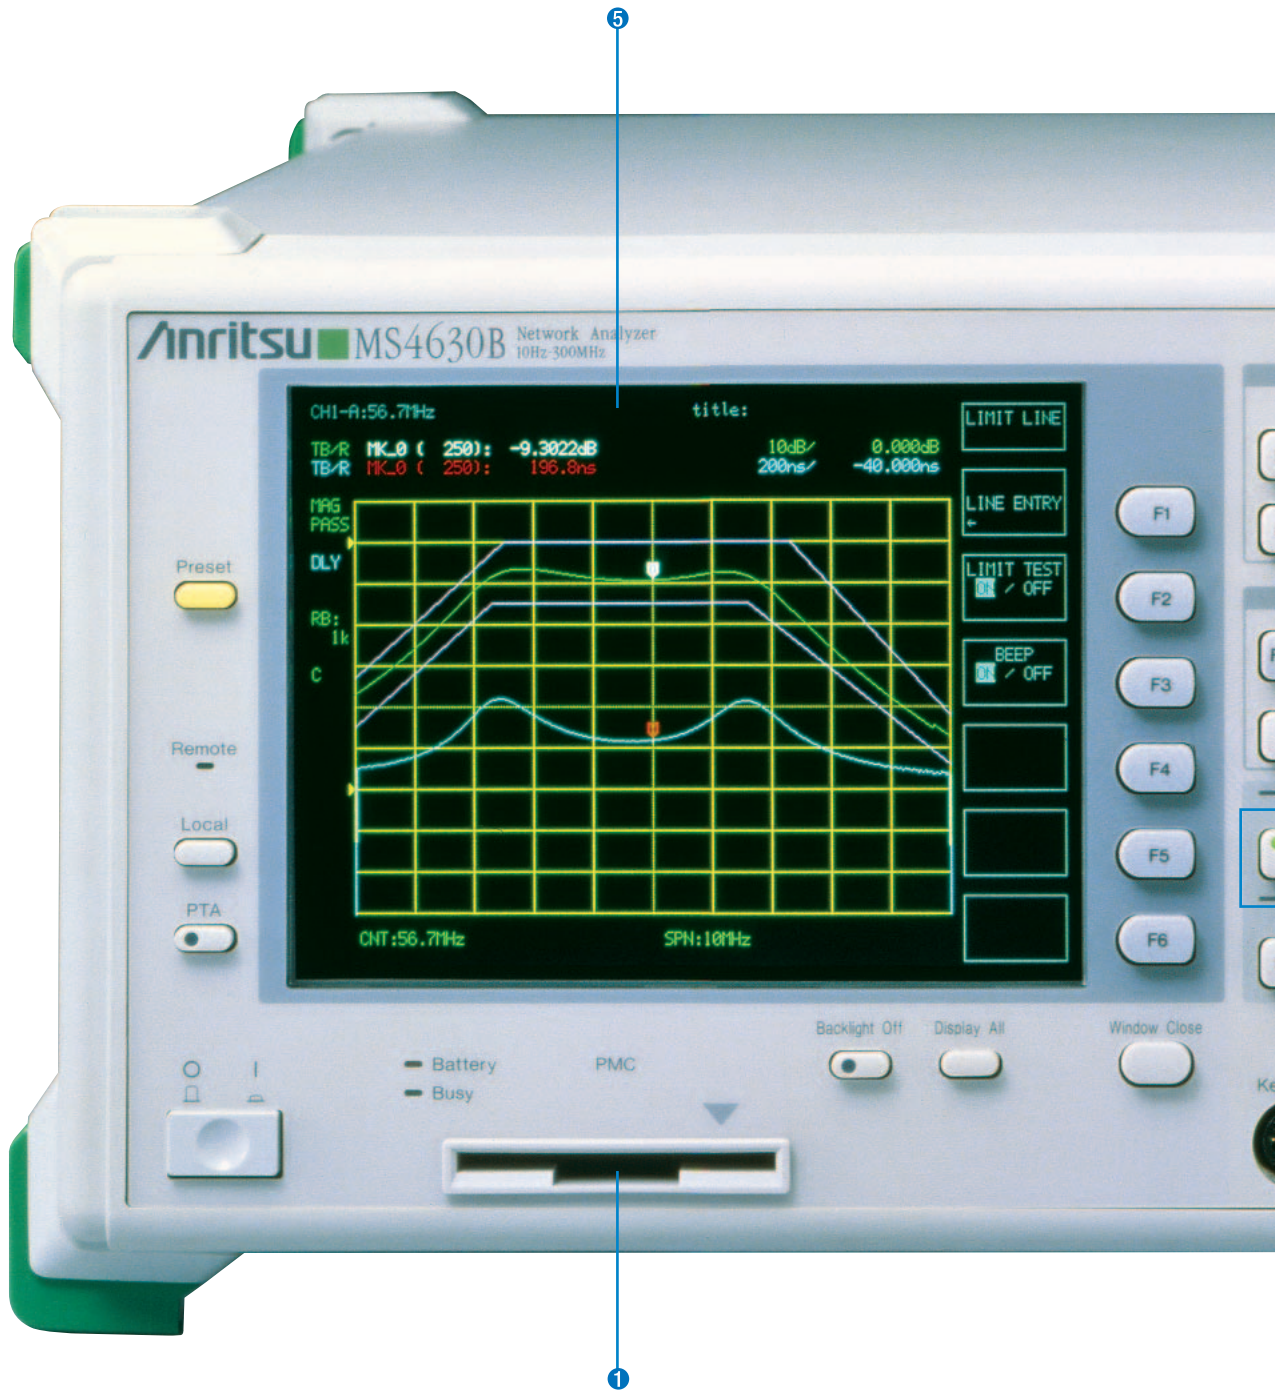

- ① PMC Slot (Option): Supports reliable Compact Flash memory cards
- ② [Filter] key: Evaluates filter characteristics, such as passband, attenuation band, IL, fo, Q, SF, etc., at single touch
- ③ [Resonator] key: Evaluates resonator characteristics (max., min., 0 Phase, equivalence constant) instantly

- ④ Floppy Disk Drive: Saves calibration data, measured data and PTA programs to 3.5" floppy disks (MS-DOS format)
- ⑤ 6.5" Color LCD
- ⑥ Calibration keys: Offer versatile calibration functions with flexible post-processing
- ⑦ Inputs/Outputs: Connectors for up to 3 channels

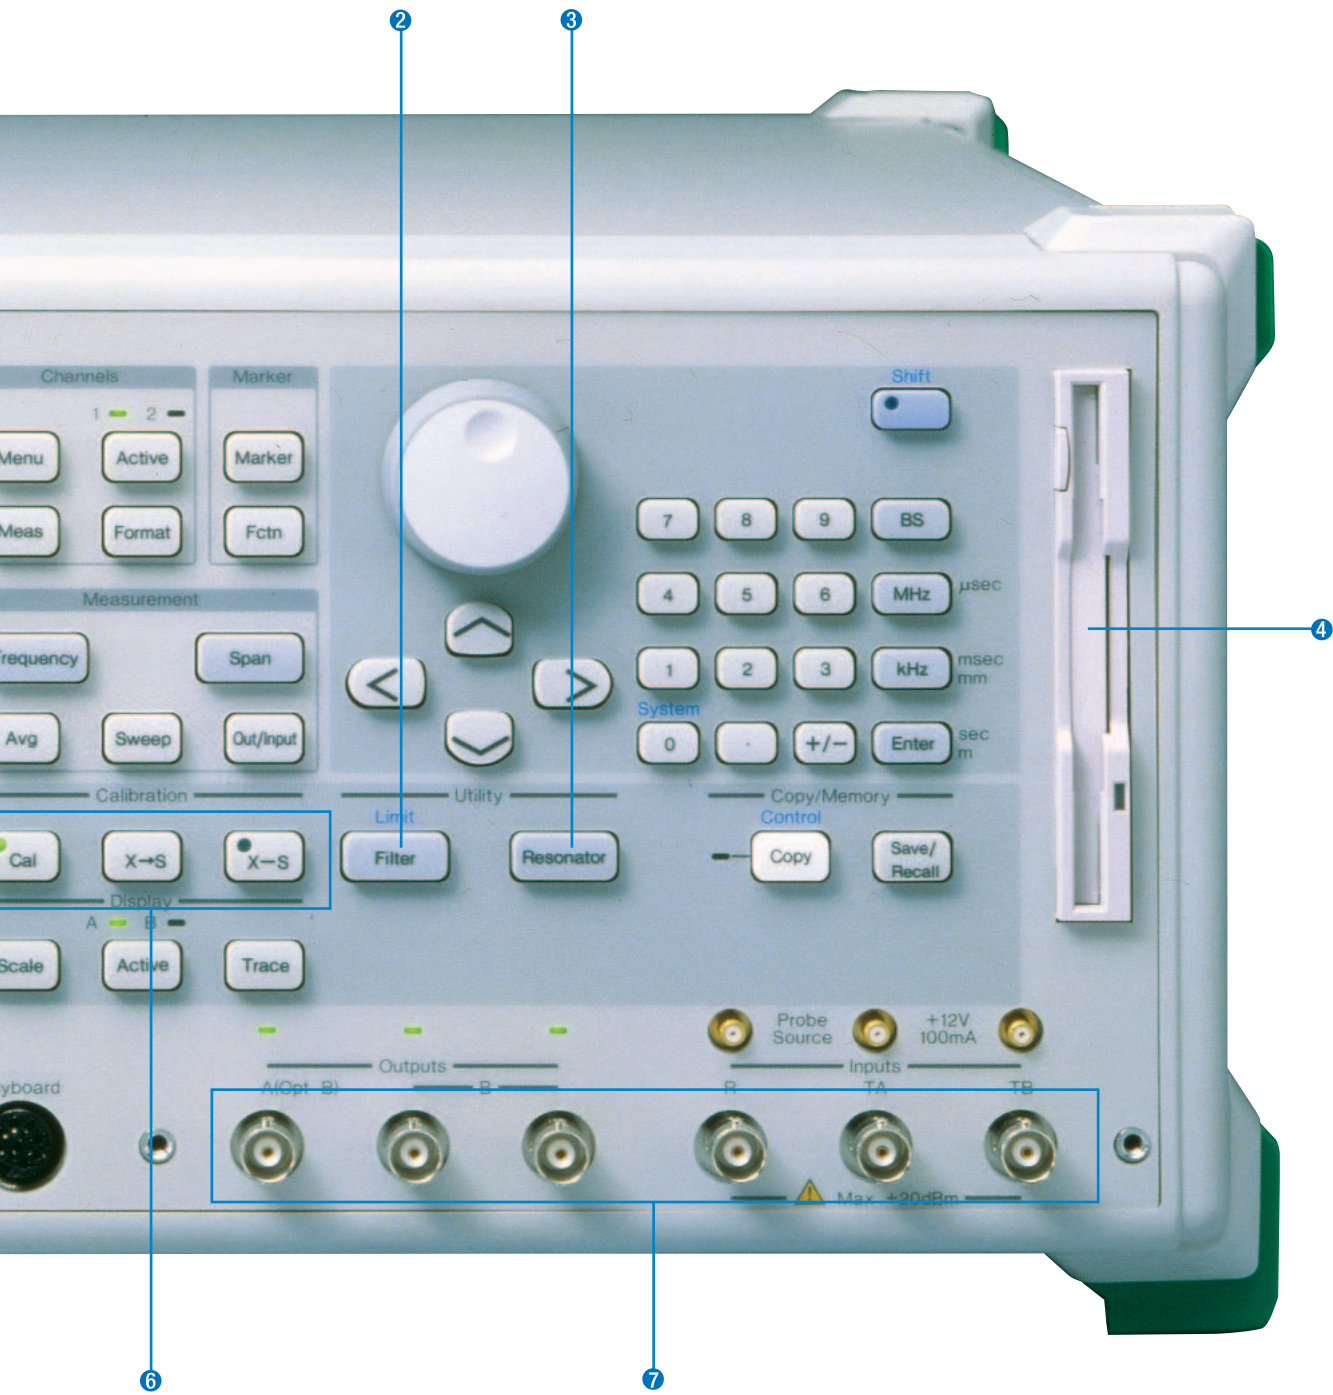

Specifications

Measurement items	Transmission characteristics (ratio measurement): Amplitude, phase, group delay Reflection/impedance characteristics: Amplitude, phase (with external transducer) Level characteristics: Absolute amplitude																					
Frequency	Range: 10 Hz to 300 MHz Resolution: 0.01 Hz Accuracy (standard) Aging rate: $\leq 1 \times 10^{-6}$ /day (15 minutes after power-on) Temperature characteristics: $\leq \pm 5 \times 10^{-6}$ (0° to $+50^\circ\text{C}$) Accuracy (Option 13: High-stability reference oscillator) Aging rate: $\leq \pm 2 \times 10^{-9}$ /day (24 h after power-on) Temperature characteristics: $\leq \pm 5 \times 10^{-8}$ (0° to $+50^\circ\text{C}$)																					
Input	Channel No. Standard: 2 (R, TA); Option 12: 3 (R, TA, TB) Impedance: 50 Ω , 1 M Ω switchable Input range (IRG): 0/+20 dBm Max. input power AC: +20 dBm; DC ± 2.2 V (50 Ω) AC: 0 dBm; DC: ± 20 V (1 M Ω) Connector: BNC-J Probe source: +12 ± 1 V, 100 mA (with protective circuit for shorts)																					
Average noise level	≤ -120 dBm (RBW: 1 kHz, 1 to 300 MHz), ≤ -110 dBm (RBW: 1 kHz, 80 kHz to 1 MHz)																					
Crosstalk	Between channels: ≥ 120 dB (80 kHz to 300 MHz), ≥ 110 dB (up to 80 kHz) Between transmitter and receiver: ≥ 125 dB																					
Resolution bandwidth	3, 10, 30, 100, 500 Hz, 1, 2, 3, 4, 5, 10, 20 kHz and automatic setting																					
Output	Output level range Output A: 0 to +21 dBm; Option 10: -70 to +21 dBm Output B: -6 to +15 dBm (-9.5 to +11.5 dB when Option 14 added); Option 10: -76 to +15 dBm (-79.5 to +11.5 dB when Option 14 added) Output resolution: 0.01 dB Output level accuracy: $\leq \pm 1.0$ dB (frequency: 100 MHz, Output A: +10 dBm) Output level linearity: $\leq \pm 0.5$ dB (0 dBm reference, frequency: 100 MHz, Output A: 0 to +21 dBm) Output level deviation: $\leq \pm 1.5$ dB (output A: +10 dBm, 100 MHz reference) Step error: ± 0.5 dB (Option 10) Output impedance: 50 Ω Connector: BNC-J																					
Amplitude measurement	Measurement range: ≥ 120 dB Measurement resolution: 0.001 dB Display scale: 0.01 dB/div to 50 dB/div (1-2-5 sequence) Dynamic accuracy <table border="1" data-bbox="453 1400 1294 1640"> <thead> <tr> <th>Level relative to IRG</th> <th>80 kHz to 100 MHz</th> <th>10 kHz to 300 MHz</th> </tr> </thead> <tbody> <tr> <td>0 to -10 dB</td> <td>± 0.20 dB</td> <td>± 0.20 dB</td> </tr> <tr> <td>-10 to -60 dB</td> <td>± 0.05 dB</td> <td>± 0.05 dB</td> </tr> <tr> <td>-60 to -70 dB</td> <td>± 0.10 dB</td> <td>± 0.30 dB</td> </tr> <tr> <td>-70 to -80 dB</td> <td>± 0.30 dB</td> <td>± 1.00 dB</td> </tr> <tr> <td>-80 to -90 dB</td> <td>± 1.20 dB</td> <td>± 4.00 dB</td> </tr> <tr> <td>-90 to -100 dB</td> <td>± 4.00 dB</td> <td>-</td> </tr> </tbody> </table>	Level relative to IRG	80 kHz to 100 MHz	10 kHz to 300 MHz	0 to -10 dB	± 0.20 dB	± 0.20 dB	-10 to -60 dB	± 0.05 dB	± 0.05 dB	-60 to -70 dB	± 0.10 dB	± 0.30 dB	-70 to -80 dB	± 0.30 dB	± 1.00 dB	-80 to -90 dB	± 1.20 dB	± 4.00 dB	-90 to -100 dB	± 4.00 dB	-
Level relative to IRG	80 kHz to 100 MHz	10 kHz to 300 MHz																				
0 to -10 dB	± 0.20 dB	± 0.20 dB																				
-10 to -60 dB	± 0.05 dB	± 0.05 dB																				
-60 to -70 dB	± 0.10 dB	± 0.30 dB																				
-70 to -80 dB	± 0.30 dB	± 1.00 dB																				
-80 to -90 dB	± 1.20 dB	± 4.00 dB																				
-90 to -100 dB	± 4.00 dB	-																				
Phase measurement	Measurement range: $\pm 180^\circ$ Measurement resolution: 0.001 $^\circ$ Display scale: 0.01 $^\circ$ to 50 $^\circ$ /div (1-2-5 sequence) Dynamic accuracy <table border="1" data-bbox="453 1774 1294 2015"> <thead> <tr> <th>Level relative to IRG</th> <th>80 kHz to 100 MHz</th> <th>10 kHz to 300 MHz</th> </tr> </thead> <tbody> <tr> <td>0 to -10 dB</td> <td>$\pm 1.5^\circ$</td> <td>$\pm 1.5^\circ$</td> </tr> <tr> <td>-10 to -60 dB</td> <td>$\pm 0.3^\circ$</td> <td>$\pm 0.3^\circ$</td> </tr> <tr> <td>-60 to -70 dB</td> <td>$\pm 0.8^\circ$</td> <td>$\pm 2.0^\circ$</td> </tr> <tr> <td>-70 to -80 dB</td> <td>$\pm 2.0^\circ$</td> <td>$\pm 6.0^\circ$</td> </tr> <tr> <td>-80 to -90 dB</td> <td>$\pm 6.0^\circ$</td> <td>$\pm 20.0^\circ$</td> </tr> <tr> <td>-90 to -100 dB</td> <td>$\pm 20.0^\circ$</td> <td>-</td> </tr> </tbody> </table>	Level relative to IRG	80 kHz to 100 MHz	10 kHz to 300 MHz	0 to -10 dB	$\pm 1.5^\circ$	$\pm 1.5^\circ$	-10 to -60 dB	$\pm 0.3^\circ$	$\pm 0.3^\circ$	-60 to -70 dB	$\pm 0.8^\circ$	$\pm 2.0^\circ$	-70 to -80 dB	$\pm 2.0^\circ$	$\pm 6.0^\circ$	-80 to -90 dB	$\pm 6.0^\circ$	$\pm 20.0^\circ$	-90 to -100 dB	$\pm 20.0^\circ$	-
Level relative to IRG	80 kHz to 100 MHz	10 kHz to 300 MHz																				
0 to -10 dB	$\pm 1.5^\circ$	$\pm 1.5^\circ$																				
-10 to -60 dB	$\pm 0.3^\circ$	$\pm 0.3^\circ$																				
-60 to -70 dB	$\pm 0.8^\circ$	$\pm 2.0^\circ$																				
-70 to -80 dB	$\pm 2.0^\circ$	$\pm 6.0^\circ$																				
-80 to -90 dB	$\pm 6.0^\circ$	$\pm 20.0^\circ$																				
-90 to -100 dB	$\pm 20.0^\circ$	-																				

Group delay measurement	<p>DRG: $\Delta\theta/(360 \times \Delta F)$ *$\Delta\theta$: phase measurement range; ΔF: frequency span x smoothing aperture (%); smoothing aperture: 20% to $\left(\frac{2}{\text{number measurement points}}\right) \times 100\%$ Measurement resolution: $2.78 \times 10^{-9}/\Delta F$ Display scale: 1 ps/div to 50 ms/div Dynamic accuracy: Phase measurement accuracy/(360 x aperture frequency)</p>
Calibration, correction	<p>Calibration types: Frequency response, 1 port, 1 path–2 port, frequency response/isolation calibration, π-network calibration Calibration data interpolation: Measurement frequency, when number of measurement points changed, based on calibration data before change, new calibration data interpolation possible (except at log frequency measurement and 1001 measurement points) Normalize: X–S Electrical length calibration Range: 0 to ± 999999.9999999 m, Resolution: 100 nm Phase offset range: $\pm 180^\circ$</p>
Sweeping	<p>Frequency sweep: LIN (CENTER/SPAN, START/STOP), LOG (START/STOP) Level sweep: LIN (START/STOP/STEP) List sweep: Frequency, level, RBW, wait time setting Number of measurement points: 11, 21, 51, 101, 251, 501, 1001 Break point: Between 1 and 1001 Sweep time: 150 μs/point, 38 ms/250 points full sweep (RBW: 20 kHz, normalize calibration, 1 trace) Setting range: 1 ms to 27.5 h Sweep functions Sweep range: Full sweep, part sweep (between markers) Sweep control: REPEAT/SINGLE, STOP/CONT Sweep trigger: INT/EXT (RISE, FALL, LEVEL)</p>
Display	<p>Max. display screens: 2 channels, 4 traces Display format: LOG MAG (M), PHASE (P), DELAY (D), M/P, M/D, LIN MAG (LIN), LIN/P, LIN/D, REAL (R), IMAG (I), R/I, Z, Z/θ, Q,Z/Q, POLAR, VSWR, IMPD (Z$\angle\theta$, Rs + Ls/Cs, Q/D, R + jx), ADMT (Y$\angle\theta$, Rp + Lp/Cp, Q/D, G + jB) Display: 640 x 480 dots, 6.5 inch color LCD</p>
Markers	<p>Marker functions: NORMAL MKR, Δ MKR, 0 MKR, MKR \rightarrow MAX, MKR \rightarrow MIN, MKR \rightarrow CF, Δ \rightarrow SPAN, MKR \rightarrow +PEAK, MKR \rightarrow –PEAK, MKR TRACK + PEAK, MKR TRACK–PEAK, MKR CHANGE, MKR OFFSET Setting: Set marker position to frequency or point Multi-marker: 10 markers max. for each trace Filter function: F0, IL, passband (L, R), attenuation band (L, R), Ripple, Q, SF Resonator function RESON 1: Fr, Fa, Zr, Za (0 PHASE), Fm, Fn, Zm, Zn (MAX/MIN) RESON 2: Fs, Fr, Fa, Zr, Za, Q, equivalence constant (R1, L1, C1, C0)</p>
Trace data calculation	<p>Averaging functions Method: SUM, MAX, MIN, Count: 1 to 1000 Measurement data memory (max. 1001 points each memory in same format as display format) Main trace (MT) memory: 2 each (XMEM) for Channel 1 and Channel 2 Calibration S memory: 2 each (SMEM) for Channel 1 and Channel 2 Image memory: 2 each (IMEM) for Channel 1 and Channel 2 Sub-trace (ST): Following calculation between MT and ST (traces calculation of same data as display format) MT \rightarrow ST, MT = MT–ST, MT = ST Limit line: Single or segment (10) limit line, pass/fail evaluation against limit line</p>
Measurement parameters auto-setting	<p>Receive bandwidth and sweep time: Receive bandwidth set automatically for set sweep time Automatically set to give minimum sweep time at set receive bandwidth</p>
Auxiliary media	<p>Saving/recalling data: Measurement parameters, measured data, calibration data, PTA application programs saved/recalled to/from FD, PMC and internal function memory Function memory FD: 100 functions max. PMC: 100 functions max. (depends on PMC capacity) Drive and capacity Internal memory: 512 kB (non-volatile) 3.5 inch FDD: 1 Capacity: 720 KB (2DD), 1.44 MB (2HD), MS-DOS format (BMP, text file) Option 01: PMC (32 to 512 KB)</p>

Printing	Video plotter, printer, and FD (bitmap format)
Rear-panel I/O	<p>Frequency: 5/10 MHz \pm10 ppm Level: \geq0.7 Vp-p (AC coupling) Input impedance: 50 Ω (connector: BNC-J) Reference oscillator output Frequency: 10 MHz Level: TTL (DC coupling, connector: BNC-J) External trigger input: TTL Level (connector: BNC-J) GPIB: IEEE488.2 (24-pin Amphenol connector) I/O Port: Parallel interface for PTA (36-pin Amphenol connector) RGB Output: For external monitor (15-pin D-Sub connector) Video output: Separate (8-pin DIN) Centronics (Option 02): Parallel interface for printer (25-pin D-Sub connector) RS-232C (Option 02): Serial interface (9-pin D-Sub connector)</p>
External control	Standard: GPIB and PTA; Option 02: RS-232C
Power	100 to 120/200 to 240 Vac ($-15\%/+10\%$, 250 Vac max., 100/200 V system auto-switching), 47.5 to 63 Hz, \leq 180 VA (max.)
Dimensions and mass	426 (W) x 177 (H) x 451 (D) mm, \leq 15 kg
Environmental conditions	Temperature range: 0° to +50°C (operating; FDD: +4° to +50°C), -20° to +60°C (storage)
EMC	EN61326: 1997/A2: 2001 (Class A) EN61000-3-2: 2000 (Class A) EN61326: 1997/A2: 2001 (Annex A)
LVD	EN61010-1: 2001 (Pollution Degree 2)

Ordering Information

Please specify the model/order number, name and quantity when ordering.

Model/Order No.	Name	Remarks
MS4630B	Mainframe Network Analyzer	10 Hz to 300 Hz
	Standard Accessories	
F0013	Power Cord, 2.6 m:	1 pc
W1534AE	Fuse, 5 A:	2 pcs
W1535AE	MS4630B Operation Manual (Mainframe):	1 copy
	MS4630B Operation Manual (Remote control):	1 copy
	Options	
MS4630B-01	PMC Interface	
MS4630B-02	RS-232C, Centronics Interface	Printer output, external control
MS4630B-10	Output Attenuator	70 dB, mechanical type
MS4630B-12	3-channel Receiver	
MS4630B-13	High-stability Reference Oscillator	Aging rate: $\leq \pm 2 \times 10^{-8}/\text{day}$
MS4630B-14	3-branch Output	For 3-channel receiver
	Optional Accessories	
SC4284	Reflection Bridge	10 to 1000 MHz BNC-J, 50 Ω , unbalanced [Calibration kit: MA8603A, MA8604A (sold separately)]
SC4288	Reflection Bridge	10 to 1000 MHz BNC-P, 50 Ω , unbalanced [Calibration kit: MA8603B, MA8604B (sold separately)]
SC6267	Reflection Bridge	10 to 1000 MHz BNC-J, 75 Ω , unbalanced [Calibration kit: MP669A, MP670A (sold separately)]
SC6289	Reflection Bridge	10 to 1000 MHz BNC-P, 75 Ω , unbalanced [Calibration kit: MP669B, MP670B (sold separately)]
MA2201A	Reflection Bridge	10 Hz to 250 kHz, 600 Ω , balanced, MA214 terminal
MA2203A	Reflection Bridge	10 Hz to 250 kHz, 900 Ω , balanced, MA214 terminal
MA2301A	Reflection Bridge	2 kHz to 2 MHz, 75 Ω , balanced, MA214 terminal
MA2302A	Reflection Bridge	2 kHz to 2 MHz, 135 Ω , balanced, MA214 terminal
MA2303A	Reflection Bridge	2 kHz to 2 MHz, 150 Ω , balanced, MA214 terminal
MA2204A	Impedance Probe	30 Hz to 300 kHz, 2 Ω to 1 M Ω
MA2403A	Impedance Probe	30 kHz to 30 MHz, 2 Ω to 1 M Ω
MA414A	Impedance Measurement Kit	For MA2403A
MA1506A	π -Network	1 to 125 MHz, for resonator measurement
MA8603A	50 Ω Termination	BNC-P
MA8603B	50 Ω Termination	BNC-J
MA8604A	50 Ω Open/Short	BNC-P
MA8604B	50 Ω Open/Short	BNC-J
MP669A	75 Ω Termination	BNC-P
MP669B	75 Ω Termination	BNC-J
MP670A	75 Ω Open/Short	BNC-P
MP670B	75 Ω Open/Short	BNC-J
J0127A	Coaxial Cord, 1.0 m	BNC-P • RG58A/U • BNC-P
J0127B	Coaxial Cord, 2.0 m	BNC-P • RG58A/U • BNC-P
J0127C	Coaxial Cord, 0.5 m	BNC-P • RG58A/U • BNC-P
P0005	Memory Card (32 KB)	
P0006	Memory Card (64 KB)	
P0007	Memory Card (128 KB)	
P0008	Memory Card (256 KB)	
P0009	Memory Card (512 KB)	
MC3305A	PTA Keyboard (JIS type)	
B0329C	Front Cover (1MW4U)	
B0333C	Rack Mount Kit	
B0334C	Carrying Case	Hard type

Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

● U.S.A.

Anritsu Company

1155 East Collins Blvd., Richardson, TX 75081, U.S.A.
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-671-1877

● Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

● Brazil

Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27 - 1 Andar
01327-010-Paraiso-São Paulo-Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

● U.K.

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

● Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49 89 442308-0
Fax: +49 89 442308-55

● France

Anritsu S.A.

9, Avenue du Québec Z.A. de Courtabœuf
91951 Les Ulis Cedex, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

● Italy

Anritsu S.p.A.

Via Elio Vittorini, 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

● Sweden

Anritsu AB

Borgafjordsgatan 13, 164 40 KISTA, Sweden
Phone: +46-853470700
Fax: +46-853470730

● Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

● Denmark

Anritsu A/S

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark
Phone: +45-72112200
Fax: +45-72112210

● Singapore

Anritsu Pte Ltd.

10, Hoe Chiang Road, #07-01/02, Keppel Towers,
Singapore 089315
Phone: +65-6282-2400
Fax: +65-6282-2533

● P.R. China (Hong Kong)

Anritsu Company Ltd.

Suite 923, 9/F., Chinachem Golden Plaza, 77 Mody
Road, Tsimshatsui East, Kowloon, Hong Kong, P.R.
China
Phone: +852-2301-4980
Fax: +852-2301-3545

● P.R. China (Beijing)

Anritsu Company Ltd.

Beijing Representative Office

Room 1515, Beijing Fortune Building,
No. 5, Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 10004, P.R. China
Phone: +86-10-6590-9230
Fax: +86-10-6590-9235

● Korea

Anritsu Corporation, Ltd.

8F Hyunjuk Building, 832-41, Yeoksam dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

● Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

● Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

● India

Anritsu Corporation

India Liaison Office

Unit No. S-3, Second Floor, Esteem Red Cross Bhavan,
No. 26, Race Course Road, Bangalore 560 001, India
Phone: +91-80-30944707

Please Contact: