


BULK CURRENT INJECTION

The F-140 is used for BCI testing from 100 kHz – 1 GHz.



Nominal

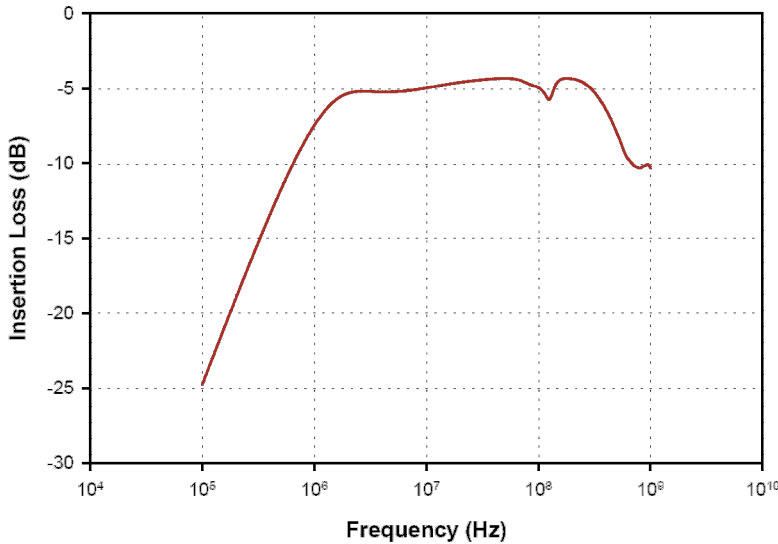

Specifications

Frequency: 100 kHz – 1 GHz
Inner diameter: 40 mm
Outer diameter: 127 mm
Height: 70 mm
Input Power rating: 100 watts (30 min)
Secondary Power Current Rating: DC - 400 Hz

- Differential Mode - Single Conductor: 100 Amps
- Common Mode - Total Cable Bundle: 500 Amps

Accessories

FCC-BCICF-2 • Calibration Fixture
Bandwidth: 100 kHz – 1 GHz
FCC-BCICF-1 • Calibration Fixture
Bandwidth: 100 kHz – 400 MHz

Specifications subject to change without notice



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.