

# R&S®FSW

## SIGNAL AND

## SPECTRUM ANALYZER

### Specifications

3  
year  
warranty



Data Sheet  
Version 10.01

**ROHDE & SCHWARZ**

Make ideas real



## CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Frequency .....	4
Sweep time.....	5
Resolution bandwidths.....	6
Level.....	7
Sensitivity .....	9
Spurious responses.....	20
Level measurement uncertainty .....	21
Adjacent channel power dynamic range .....	22
Trigger functions.....	23
Audio demodulator .....	23
I/Q data .....	24
Inputs and outputs .....	33
General data.....	36
<b>Options .....</b>	<b>38</b>
R&S®FSW-B10 external generator control.....	38
R&S®FSW-B13 highpass filters .....	38
R&S®FSW-B17 digital baseband interface.....	38
R&S®FSW-B517 DIG IQ 40G streaming out interface (not available with R&S®FSW-B4001/-B6001/-B8001 option) .....	39
R&S®FSW-B1017 DIG IQ 40G streaming out interface (max. 1 GHz bandwidth) (available with R&S®FSW-B1200/-B2001/-B800R option).....	39
R&S®FSW-B21 LO/IF connections for external mixers (not available for R&S®FSW8, R&S®FSW13) .....	39
R&S®FSW-B24 RF preamplifier.....	40
R&S®FSW-B25 electronic attenuator .....	40
R&S®FSW-B71 analog baseband inputs, R&S®FSW-B71E 80 MHz analysis bandwidth for analog baseband inputs .....	41
R&S®FSW-B2000 2 GHz analysis bandwidth (option available for all models except R&S®FSW8, R&S®FSW13) .....	43
R&S®FSW-B5000 5 GHz analysis bandwidth for R&S®FSW43 and R&S®FSW85 .....	45
R&S®FSW-B2071 oscilloscope baseband inputs (available for all R&S®FSW models).....	46
R&S®FSW-K980 health and utilization monitoring service (HUMS).....	47
<b>Ordering information .....</b>	<b>48</b>
Options for R&S®FSW with order no. 1331.5003.xx.....	48
Upgrades.....	55
Recommended extras.....	57
Power sensors supported .....	59
Probes supported by R&S®FSW-B71/-B71E option .....	60
Oscilloscopes supported by R&S®FSW-B2000/-B2071 option .....	60
Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option .....	60
Oscilloscopes supported by R&S®FSW-B2071 option.....	61
Service options .....	61

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

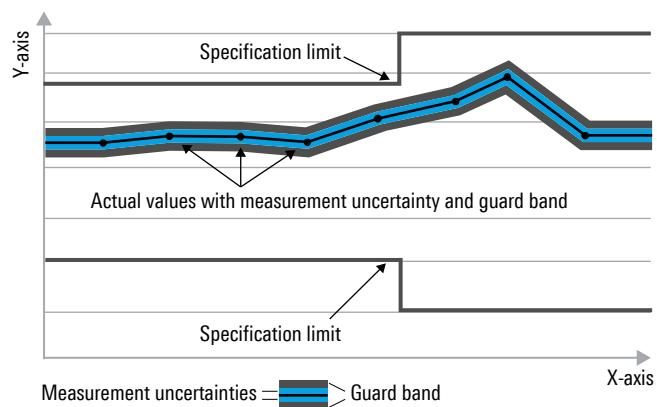

## Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under "Specifications with limits" above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP/3GPP2 standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bits per second (Gbps), million bits per second (Mbps), thousand bits per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

# Specifications

## Frequency


<b>Frequency range</b>	R&S®FSW8	
	DC coupled	2 Hz to 8 GHz
	AC coupled	10 MHz to 8 GHz
	R&S®FSW13	
	DC coupled	2 Hz to 13.6 GHz
	AC coupled	10 MHz to 13.6 GHz
	R&S®FSW26	
	DC coupled	2 Hz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®FSW43	
	DC coupled	2 Hz to 43.5 GHz
	AC coupled	10 MHz to 43.5 GHz
	R&S®FSW50	
	DC coupled	2 Hz to 50 GHz
	AC coupled	10 MHz to 50 GHz
	R&S®FSW67	
	DC coupled	2 Hz to 67 GHz
	AC coupled	10 MHz to 67 GHz
	R&S®FSW85 <sup>1</sup>	
	RF1 input standard	
	DC coupled	2 Hz to 85 GHz
	AC coupled	10 MHz to 85 GHz
	with R&S®FSW-B90G option, YIG preselector = off	
	DC coupled	2 Hz to 90 GHz
	AC coupled	10 MHz to 90 GHz
	RF2 input	
	DC coupled	2 Hz to 67 GHz
	AC coupled	10 MHz to 67 GHz
<b>Frequency resolution</b>		0.01 Hz

<b>Reference frequency, internal</b>		
Accuracy		$\pm(\text{time since last adjustment} \times \text{aging rate} + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-7}$
	with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 3 \times 10^{-8}$
Temperature drift (0 °C to +50 °C)	standard	$\pm 1 \times 10^{-7}$
	with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 1 \times 10^{-9}$
Achievable initial calibration accuracy	standard	$\pm 1 \times 10^{-8}$
	with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 5 \times 10^{-9}$

<b>Frequency readout</b>		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	1001
	range	101 to 100001
Marker tuning frequency step size	marker step size = sweep points	span / (sweep points - 1)
	marker step size = standard	span / (default sweep points - 1)
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Maximum span deviation		$\pm 0.1\%$

<sup>1</sup> For R&S®FSW85 all subsequent specifications apply to both RF1 input and RF2 input, unless otherwise stated.

<b>Spectral purity</b>	
SSB phase noise	frequency = 1000 MHz, carrier offset
	10 Hz, without R&S®FSW-B4 option
	-80 dBc (1 Hz), typ. -90 dBc (1 Hz)
	10 Hz, with R&S®FSW-B4 option
	-95 dBc (1 Hz), typ. -100 dBc (1 Hz)
	100 Hz
	-109 dBc (1 Hz), typ. -116 dBc (1 Hz)
	1 kHz
	< -127 dBc (1 Hz), typ. -132 dBc (1 Hz)
	10 kHz
	< -136 dBc (1 Hz), typ. -140 dBc (1 Hz)
	100 kHz
	< -139 dBc (1 Hz), typ. -143 dBc (1 Hz)
	1 MHz
	< -145 dBc (1 Hz), typ. -149 dBc (1 Hz)
	10 MHz
	-156 dBc (1 Hz) (nom.)
Residual FM	frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms
	< 0.1 Hz (nom.)

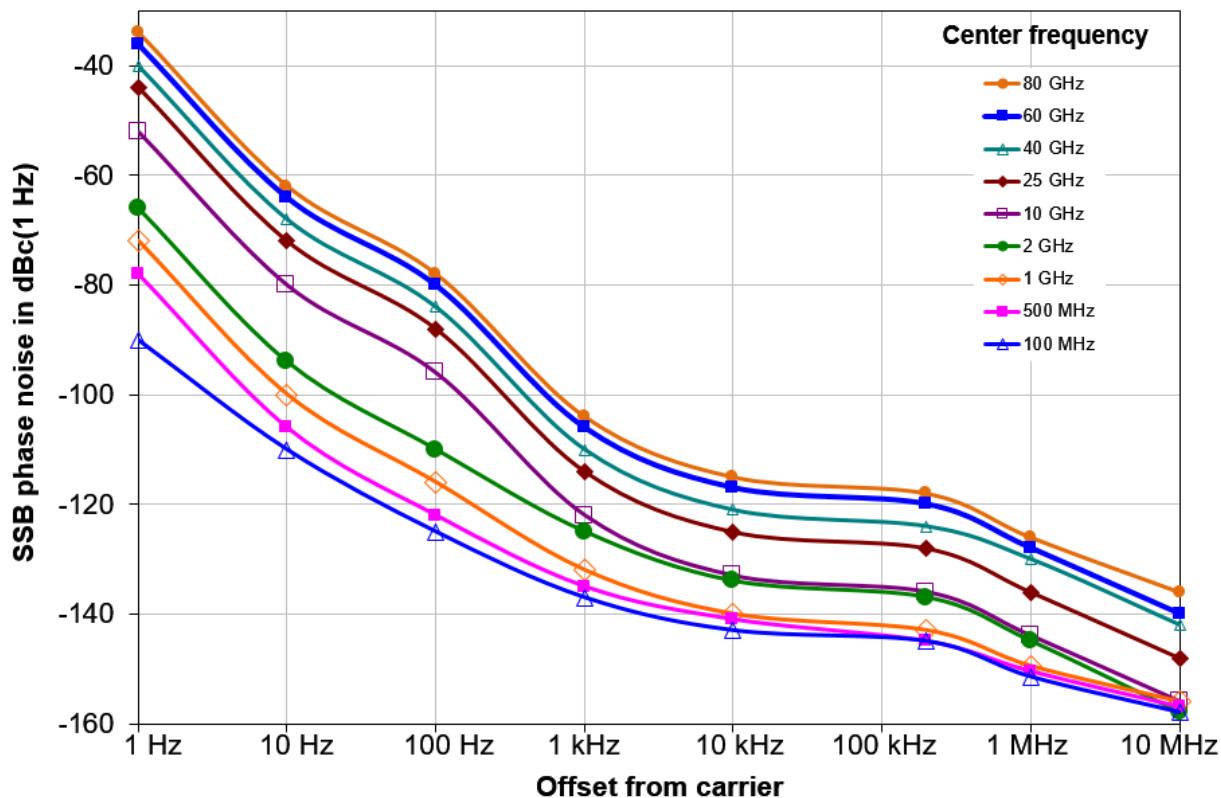

Typical phase noise at different center frequencies (with the R&S®FSW-B4 option for offsets  $\leq 10$  Hz)

## Sweep time

Sweep time range	span = 0 Hz	1 $\mu$ s to 16000 s
	span $\geq 10$ Hz	3 $\mu$ s to 16000 s <sup>2</sup>
Sweep time accuracy	span = 0 Hz, sweep points $\leq 10001$	$\pm 0.1\%$ (nom.)
	span $\geq 10$ Hz	$\pm 3\%$ (nom.)

<sup>2</sup> The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

## Resolution bandwidths

<b>Sweep filters and FFT filters</b>	
Resolution bandwidths ( $-3\text{ dB}$ )	1 Hz to 10 MHz in 1/2/3/5 sequence, 3.9 kHz, 6.25 kHz, 6 MHz additionally
	with R&S®FSW-B8E option 20 MHz, 40 MHz additionally
	with R&S®FSW-B8 option 20 MHz, 40 MHz, 50 MHz, 80 MHz additionally
Bandwidth uncertainty	< 3 % (nom.)
Shape factor 60 dB:3 dB	< 5 (nom.)

<b>Channel filters</b>	
Bandwidths ( $-3\text{ dB}$ )	standard (RRC = root raised cosine) 100 Hz, 200 Hz, 300 Hz, 500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/ 24.3 (RRC)/25/30/50/100/150/192/200/ 300/500 kHz 1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/10 MHz
	with R&S®FSW-B8E option 20 MHz, 28 MHz, 40 MHz additionally
	with R&S®FSW-B8 option 20 MHz, 28 MHz, 40 MHz, 80 MHz additionally
Bandwidth accuracy	$\pm 2\%$ (nom.)
Shape factor 60 dB:3 dB	< 2 (nom.)

<b>EMI filters (with R&amp;S®FSW-K54 only)</b>	
Bandwidths ( $-6\text{ dB}$ )	10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz
Bandwidth uncertainty	< 3 % (nom.)
Shape factor 60 dB:6 dB	< 4 (nom.)

<b>Video bandwidths</b>	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®FSW-B8 option	20 MHz, 50 MHz, 80 MHz additionally <sup>3</sup>

<b>Maximum signal analysis bandwidth</b>	equalized
	standard 28 MHz (nom.) <sup>4,5</sup>
	with R&S®FSW-B40 option 40 MHz (nom.) <sup>5</sup>
	with R&S®FSW-B80 option 80 MHz (nom.) <sup>5</sup>
	with R&S®FSW-B160 option 160 MHz (nom.) <sup>5</sup>
	with R&S®FSW-B320 option 320 MHz (nom.) <sup>5</sup>
	with R&S®FSW-B512/-B512R option 512 MHz (nom.) <sup>5</sup>
	with R&S®FSW-B1200 option 1200 MHz (nom.) <sup>6</sup>
	with R&S®FSW-B2001/-B800R option 2000 MHz (nom.) <sup>6</sup>
	with R&S®FSW-B4001 option 4400 MHz (nom.) <sup>6</sup>
	with R&S®FSW-B6001 option 6400 MHz (nom.) <sup>6</sup>
	with R&S®FSW-B8001 option 8312 MHz (nom.) <sup>6</sup>
	with R&S®FSW-B2000 option 2000 MHz (nom.) <sup>7</sup>
	with R&S®FSW-B5000 option 5000 MHz (nom.) <sup>7</sup>

<sup>3</sup> For video bandwidth settings > 20 MHz, the video bandwidth filter is bypassed.

<sup>4</sup> For instruments with serial numbers below R&S®FSW8: 101619, R&S®FSW13: 101533, R&S®FSW26: 102669, R&S®FSW43: 102176, R&S®FSW50: 101651, R&S®FSW67: 101698, R&S®FSW85: 101730 the standard maximum signal analysis bandwidth is 10 MHz and can be extended to 28 MHz with the R&S®FSW-B28 option.

<sup>5</sup> YIG preselector off for  $f \geq 8\text{ GHz}$ .

<sup>6</sup> YIG preselector off for  $f \geq 12\text{ GHz}$ .

<sup>7</sup> The R&S®FSW-B2000/-B5000 option use an external digitizer and can be combined with the base unit or any other analysis bandwidth option without the R&S®FSW-B4001/-B6001/-B8001 option. For detailed specifications, see section "R&S®FSW-B5000 5 GHz analysis bandwidth".

## Level

Level display		
Display range		displayed noise floor up to +30 dBm
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average
	with R&S®FSW-K54	quasi-peak, RMS average, CISPR average additionally
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

Maximum input level		
DC voltage	AC coupled	
	R&S®FSW8 to R&S®FSW67	50 V
	R&S®FSW85	25 V
	DC coupled	0 V
CW RF power	RF attenuation = 0 dB	20 dBm (= 0.1 W)
	RF attenuation $\geq$ 10 dB	
	without R&S®FSW-B25 option or with R&S®FSW-B25 option installed and mechanical attenuation $\geq$ 10 dB	30 dBm (= 1 W)
Pulse spectral density	RF attenuation = 0 dB, RF preamplifier off	97 dB $\mu$ V/MHz
Maximum pulse voltage	without R&S®FSW-B25 option or electronic attenuation off	
	RF attenuation $\geq$ 10 dB	150 V
	with R&S®FSW-B25 option installed, electronic attenuation on	
	mechanical attenuation = 0 dB	25 V
Maximum pulse energy, pulse duration $\tau = 10 \mu$ s	mechanical attenuation $\geq$ 10 dB	75 V
	without R&S®FSW-B25 option or electronic attenuation off	
	RF attenuation $\geq$ 10 dB	1 mWs
	with R&S®FSW-B25 option installed, electronic attenuation on	
	mechanical attenuation $\geq$ 10 dB	1 mWs

Intermodulation		
1 dB compression of input mixer (two-tone)	RF attenuation = 0 dB, RF preamplifier off	
	$f_{in} \leq 3 \text{ GHz}$	+15 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	+10 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	+7 dBm (nom.)
	with R&S®FSW-B24 option, RF attenuation = 0 dB, RF preamplifier on	
	$f_{in} \leq 3 \text{ GHz}$	-13 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	-20 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	-23 dBm (nom.)

Third-order intercept point (TOI)	R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, RF attenuation = 0 dB, level = -15 dBm (both), $\Delta f > 5 \times \text{RBW}$ , RF preamplifier off	
	$f_{in} < 10 \text{ MHz}$	28 dBm (nom.)
	$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	> 25 dBm, typ. 30 dBm
	$1 \text{ GHz} \leq f_{in} < 3 \text{ GHz}$	> 20 dBm, typ. 25 dBm <sup>8</sup>
	$3 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	> 17 dBm, typ. 20 dBm
	R&S®FSW85, RF attenuation = 0 dB, level = -15 dBm (both), $\Delta f > 5 \times \text{RBW}$ , RF preamplifier off	
	$f_{in} < 100 \text{ MHz}$	22 dBm (nom.)
	$100 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	> 22 dBm, typ. 30 dBm
	$1 \text{ GHz} \leq f_{in} < 3 \text{ GHz}$	> 20 dBm, typ. 25 dBm <sup>8</sup>
	$3 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	> 17 dBm, typ. 20 dBm
	R&S®FSW13, R&S®FSW26, RF attenuation = 0 dB, level = -15 dBm (both), $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier off	
	$8 \text{ GHz} \leq f_{in} < 10 \text{ GHz}$	> 14 dBm, typ. 17 dBm
	$10 \text{ GHz} \leq f_{in} < 12 \text{ GHz}$	> 16 dBm, typ. 20 dBm
	$12 \text{ GHz} \leq f_{in} < 17 \text{ GHz}$	> 18 dBm, typ. 23 dBm
	$17 \text{ GHz} \leq f_{in} < 19 \text{ GHz}$	> 16 dBm, typ. 20 dBm
	$19 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$	> 18 dBm, typ. 23 dBm
R&S®FSW43, R&S®FSW50, RF attenuation = 0 dB, level = -20 dBm (both), $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier off	R&S®FSW43, R&S®FSW50, RF attenuation = 0 dB, level = -20 dBm (both), $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier off	
	$8 \text{ GHz} \leq f_{in} < 13.6 \text{ GHz}$	> 8 dBm, typ. 11 dBm
	$13.6 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	> 10 dBm, typ. 15 dBm
	$f_{in} > 40 \text{ GHz}$	12 dBm (nom.)
	R&S®FSW67, R&S®FSW85, RF attenuation = 0 dB, level = -20 dBm (both), $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier off	
	$8 \text{ GHz} \leq f_{in} < 13.6 \text{ GHz}$	> 11 dBm, typ. 16 dBm
	$13.6 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	> 10 dBm, typ. 15 dBm
	$f_{in} > 40 \text{ GHz}$	12 dBm (nom.)
	R&S®FSW8, R&S®FSW13, R&S®FSW26 with R&S®FSW-B24 option, RF attenuation = 0 dB, level = -50 dBm (both), $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier on	
	$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	-10 dBm (nom.)
	$1 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	-13 dBm (nom.)
	$8 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$	-15 dBm (nom.)
	R&S®FSW43, R&S®FSW50, R&S®FSW67 with R&S®FSW-B24 option, RF attenuation = 0 dB, level = -55 dBm (both), $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier on	
	$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	-5 dBm (nom.)
	$1 \text{ GHz} \leq f_{in} \leq 4 \text{ GHz}$	-10 dBm (nom.)
	$f_{in} > 4 \text{ GHz}$	-20 dBm (nom.)
Second-harmonic intercept point (SHI)	R&S®FSW8, R&S®FSW13, R&S®FSW26, RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off	
	$1 \text{ MHz} < f_{in} \leq 350 \text{ MHz}$	> 50 dBm, typ. 62 dBm
	$350 \text{ MHz} < f_{in} \leq 500 \text{ MHz}$	> 70 dBm, typ. 80 dBm
	$500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>9</sup>	> 47 dBm, typ. 52 dBm
	$500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>10</sup>	> 62 dBm, typ. 70 dBm
	$1.5 \text{ GHz} \leq f_{in} \leq 4 \text{ GHz}$	> 62 dBm, typ. 70 dBm
	$4 \text{ GHz} < f_{in} \leq 13.5 \text{ GHz}$	65 dBm (nom.)
	R&S®FSW43, R&S®FSW50, R&S®FSW67, R&S®FSW85, RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off	
	$1 \text{ MHz} < f_{in} \leq 500 \text{ MHz}$	> 45 dBm, typ. 55 dBm <sup>11</sup>
	$500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>9</sup>	> 47 dBm, typ. 56 dBm
	$500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>10</sup>	> 52 dBm, typ. 60 dBm
	$1.5 \text{ GHz} \leq f_{in} \leq 4 \text{ GHz}$	> 62 dBm, typ. 70 dBm
	$4 \text{ GHz} < f_{in} \leq 42.5 \text{ GHz}$	65 dBm (nom.)
	R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, with R&S®FSW-B24 option, RF attenuation = 0 dB, level = -50 dBm, YIG preselector on, RF preamplifier on	
	$50 \text{ MHz} < f_{in} \leq 21.75 \text{ GHz}$	10 dBm (nom.)

<sup>8</sup> With R&S®FSW-B13 highpass filter option, highpass off. With highpass on, the TOI degrades by 5 dB (nom.).<sup>9</sup> Without R&S®FSW-B13 highpass filter option or highpass off.<sup>10</sup> With R&S®FSW-B13 highpass filter option, highpass on.<sup>11</sup> For  $1 \text{ MHz} < f_{in} \leq 100 \text{ MHz}$  the following limit applies for R&S®FSW85: > 42 dBm, typ. 47 dBm.

## Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

### Displayed average noise level of the R&S®FSW8

RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, without R&S®FSW-B25 electronic attenuator option		
9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm	
1 MHz < f ≤ 1 GHz	-150 dBm, typ. -154 dBm	
1 GHz < f < 3 GHz <sup>9</sup>	-152 dBm, typ. -156 dBm	
1 GHz < f < 3 GHz <sup>10</sup>	-155 dBm, typ. -160 dBm	
3 GHz ≤ f ≤ 8 GHz	-152 dBm, typ. -156 dBm	
add 1 dB to the above values if the R&S®FSW-B25 option is installed		
RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, with R&S®FSW-B24 option, without R&S®FSW-B25 electronic attenuator option	
	10 MHz < f ≤ 50 MHz	-154 dBm (nom.)
	50 MHz < f ≤ 150 MHz	-163 dBm, typ. -166 dBm
	150 MHz < f ≤ 8 GHz	-166 dBm, typ. -169 dBm
add 1 dB to the above values if the R&S®FSW-B25 option is installed		
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

### Displayed average noise level of the R&S®FSW13, R&S®FSW26, without R&S®FSW-B24 option

RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, without R&S®FSW-B25 electronic attenuator option		
9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm	
1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm	
1 GHz < f < 3 GHz <sup>9</sup>	-151 dBm, typ. -156 dBm	
1 GHz < f < 3 GHz <sup>10</sup>	-154 dBm, typ. -159 dBm	
3 GHz ≤ f < 8 GHz	-151 dBm, typ. -156 dBm	
8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -155 dBm	
13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -153 dBm	
18 GHz ≤ f < 25 GHz	-147 dBm, typ. -150 dBm	
25 GHz ≤ f < 26.5 GHz	-143 dBm, typ. -146 dBm	
add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed,		
add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed		
RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, without R&S®FSW-B25 electronic attenuator option	
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -155 dBm
	13.6 GHz ≤ f < 25 GHz	-149 dBm, typ. -153 dBm
	25 GHz ≤ f < 26.5 GHz	-147 dBm, typ. -150 dBm
add 2 dB to the above values if the R&S®FSW-B25 option is installed		
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW13, R&S®FSW26, with R&S®FSW-B24 option		
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C 2 Hz ≤ f ≤ 100 Hz      -110 dBm, typ. -120 dBm 100 Hz < f ≤ 1 kHz      -120 dBm, typ. -130 dBm 1 kHz < f < 9 kHz      -135 dBm, typ. -147 dBm RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, without R&S®FSW-B25 electronic attenuator option 9 kHz ≤ f ≤ 1 MHz      -145 dBm, typ. -150 dBm 1 MHz < f ≤ 1 GHz      -149 dBm, typ. -154 dBm 1 GHz < f < 3 GHz <sup>9</sup> -151 dBm, typ. -156 dBm 1 GHz < f < 3 GHz <sup>10</sup> -154 dBm, typ. -159 dBm 3 GHz ≤ f < 8 GHz      -151 dBm, typ. -156 dBm 8 GHz ≤ f < 13.6 GHz      -149 dBm, typ. -154 dBm 13.6 GHz ≤ f < 18 GHz      -148 dBm, typ. -152 dBm 18 GHz ≤ f < 25 GHz      -145 dBm, typ. -149 dBm 25 GHz ≤ f < 26.5 GHz      -141 dBm, typ. -145 dBm add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed, add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, without R&S®FSW-B25 electronic attenuator option 8 GHz ≤ f < 13.6 GHz      -149 dBm, typ. -154 dBm 13.6 GHz ≤ f < 25 GHz      -148 dBm, typ. -152 dBm 25 GHz ≤ f < 26.5 GHz      -145 dBm, typ. -149 dBm add 2 dB to the above values if the R&S®FSW-B25 option is installed	
RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on, without R&S®FSW-B25 electronic attenuator option 10 MHz < f ≤ 50 MHz      -154 dBm (nom.) 50 MHz < f ≤ 150 MHz      -163 dBm, typ. -166 dBm 150 MHz < f ≤ 8 GHz      -166 dBm, typ. -169 dBm 8 GHz < f ≤ 13.6 GHz      -164 dBm, typ. -168 dBm 13.6 GHz < f ≤ 22 GHz      -162 dBm, typ. -166 dBm 22 GHz < f ≤ 26.5 GHz      -157 dBm, typ. -161 dBm add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed	
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW43 without R&S®FSW-B24 option		
		RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
2 Hz ≤ f ≤ 100 Hz		-110 dBm, typ. -120 dBm
100 Hz < f ≤ 1 kHz		-120 dBm, typ. -130 dBm
1 kHz < f < 9 kHz		-135 dBm, typ. -147 dBm
RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on		
9 kHz ≤ f ≤ 1 MHz		-145 dBm, typ. -150 dBm
1 MHz < f ≤ 1 GHz		-149 dBm, typ. -154 dBm
1 GHz < f < 3 GHz <sup>9</sup>		-151 dBm, typ. -156 dBm
1 GHz < f < 3 GHz <sup>10</sup>		-154 dBm, typ. -159 dBm
3 GHz ≤ f < 8 GHz		-151 dBm, typ. -156 dBm
8 GHz ≤ f < 13.6 GHz		-150 dBm, typ. -154 dBm
13.6 GHz ≤ f < 18 GHz		-149 dBm, typ. -153 dBm
18 GHz ≤ f < 25 GHz		-147 dBm, typ. -151 dBm
25 GHz ≤ f ≤ 34 GHz		-143 dBm, typ. -147 dBm
34 GHz < f ≤ 40 GHz		-140 dBm, typ. -144 dBm
40 GHz < f ≤ 43.5 GHz		-138 dBm, typ. -142 dBm
add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed		
		RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off
8 GHz ≤ f < 13.6 GHz		-152 dBm, typ. -157 dBm
13.6 GHz ≤ f < 18 GHz		-151 dBm, typ. -156 dBm
18 GHz ≤ f < 25 GHz		-149 dBm, typ. -154 dBm
25 GHz ≤ f ≤ 34 GHz		-147 dBm, typ. -151 dBm
34 GHz < f ≤ 40 GHz		-144 dBm, typ. -148 dBm
40 GHz < f ≤ 43.5 GHz		-142 dBm, typ. -146 dBm
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW43 with R&S®FSW-B24 option		
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
	9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>9</sup>	-150 dBm, typ. -155 dBm
	1 GHz < f < 3 GHz <sup>10</sup>	-153 dBm, typ. -158 dBm
	3 GHz ≤ f < 8 GHz	-150 dBm, typ. -155 dBm
	8 GHz ≤ f < 13.6 GHz	-148 dBm, typ. -152 dBm
	13.6 GHz ≤ f < 18 GHz	-147 dBm, typ. -151 dBm
	18 GHz ≤ f < 25 GHz	-145 dBm, typ. -149 dBm
	25 GHz ≤ f < 34 GHz	-140 dBm, typ. -144 dBm
	34 GHz < f ≤ 40 GHz	-137 dBm, typ. -141 dBm
	40 GHz < f ≤ 43.5 GHz	-135 dBm, typ. -140 dBm
	add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off	
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -155 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -154 dBm
	18 GHz ≤ f < 25 GHz	-147 dBm, typ. -152 dBm
	25 GHz ≤ f < 34 GHz	-144 dBm, typ. -149 dBm
	34 GHz < f ≤ 40 GHz	-141 dBm, typ. -145 dBm
	40 GHz < f ≤ 43.5 GHz	-139 dBm, typ. -144 dBm
RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on	
	100 kHz < f ≤ 1 MHz	-160 dBm, typ. -163 dBm
	1 MHz < f ≤ 3 GHz	-165 dBm, typ. -169 dBm
	3 GHz < f ≤ 8 GHz	-162 dBm, typ. -166 dBm
	8 GHz < f ≤ 18 GHz	-162 dBm, typ. -167 dBm
	18 GHz < f ≤ 26.5 GHz	-161 dBm, typ. -166 dBm
	26.5 GHz < f ≤ 40 GHz	-160 dBm, typ. -164 dBm
	40 GHz < f ≤ 43.5 GHz	-157 dBm, typ. -162 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed	
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW50 without R&S®FSW-B24 option		
		RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
2 Hz ≤ f ≤ 100 Hz		-110 dBm, typ. -120 dBm
100 Hz < f ≤ 1 kHz		-120 dBm, typ. -130 dBm
1 kHz < f < 9 kHz		-135 dBm, typ. -147 dBm
		RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on
9 kHz ≤ f ≤ 1 MHz		-145 dBm, typ. -150 dBm
1 MHz < f ≤ 1 GHz		-149 dBm, typ. -154 dBm
1 GHz < f < 3 GHz <sup>9</sup>		-151 dBm, typ. -156 dBm
1 GHz < f < 3 GHz <sup>10</sup>		-154 dBm, typ. -159 dBm
3 GHz ≤ f < 8 GHz		-151 dBm, typ. -156 dBm
8 GHz ≤ f < 13.6 GHz		-150 dBm, typ. -154 dBm
13.6 GHz ≤ f < 18 GHz		-149 dBm, typ. -153 dBm
18 GHz ≤ f < 25 GHz		-147 dBm, typ. -151 dBm
25 GHz ≤ f < 34 GHz		-143 dBm, typ. -147 dBm
34 GHz < f ≤ 40 GHz		-140 dBm, typ. -144 dBm
40 GHz < f ≤ 43.5 GHz		-138 dBm, typ. -142 dBm
43.5 GHz < f ≤ 47 GHz		-136 dBm, typ. -140 dBm
47 GHz < f ≤ 49 GHz		-134 dBm, typ. -138 dBm
49 GHz < f ≤ 50 GHz		-132 dBm, typ. -136 dBm
		add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed
		RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off
8 GHz ≤ f < 13.6 GHz		-152 dBm, typ. -157 dBm
13.6 GHz ≤ f < 18 GHz		-151 dBm, typ. -156 dBm
18 GHz ≤ f < 25 GHz		-149 dBm, typ. -154 dBm
25 GHz ≤ f < 34 GHz		-147 dBm, typ. -151 dBm
34 GHz < f ≤ 40 GHz		-144 dBm, typ. -148 dBm
40 GHz < f ≤ 43.5 GHz		-142 dBm, typ. -146 dBm
43.5 GHz < f ≤ 47 GHz		-140 dBm, typ. -144 dBm
47 GHz < f ≤ 49 GHz		-138 dBm, typ. -142 dBm
49 GHz < f ≤ 50 GHz		-136 dBm, typ. -140 dBm
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

<b>Displayed average noise level of the R&amp;S®FSW50 with R&amp;S®FSW-B24 option</b>																																																					
RF preamplifier off	<p>RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C</p> <table> <tr><td>2 Hz ≤ f ≤ 100 Hz</td><td>-110 dBm</td></tr> <tr><td>100 Hz &lt; f ≤ 1 kHz</td><td>-120 dBm</td></tr> <tr><td>1 kHz &lt; f &lt; 9 kHz</td><td>-135 dBm</td></tr> </table> <p>RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on</p> <table> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-145 dBm</td></tr> <tr><td>1 MHz &lt; f ≤ 1 GHz</td><td>-149 dBm</td></tr> <tr><td>1 GHz &lt; f &lt; 3 GHz<sup>9</sup></td><td>-150 dBm</td></tr> <tr><td>1 GHz &lt; f &lt; 3 GHz<sup>10</sup></td><td>-153 dBm</td></tr> <tr><td>3 GHz ≤ f &lt; 8 GHz</td><td>-150 dBm</td></tr> <tr><td>8 GHz ≤ f &lt; 13.6 GHz</td><td>-148 dBm</td></tr> <tr><td>13.6 GHz ≤ f &lt; 18 GHz</td><td>-147 dBm</td></tr> <tr><td>18 GHz ≤ f &lt; 25 GHz</td><td>-145 dBm</td></tr> <tr><td>25 GHz ≤ f &lt; 34 GHz</td><td>-140 dBm</td></tr> <tr><td>34 GHz &lt; f ≤ 40 GHz</td><td>-137 dBm</td></tr> <tr><td>40 GHz &lt; f ≤ 43.5 GHz</td><td>-135 dBm</td></tr> <tr><td>43.5 GHz &lt; f ≤ 47 GHz</td><td>-133 dBm</td></tr> <tr><td>47 GHz &lt; f ≤ 49 GHz</td><td>-131 dBm</td></tr> <tr><td>49 GHz &lt; f ≤ 50 GHz</td><td>-129 dBm</td></tr> </table> <p>add 2 dB to the above values for frequencies &lt; 8 GHz, if the R&amp;S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed</p> <p>RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off</p> <table> <tr><td>8 GHz ≤ f &lt; 13.6 GHz</td><td>-150 dBm</td></tr> <tr><td>13.6 GHz ≤ f &lt; 18 GHz</td><td>-149 dBm</td></tr> <tr><td>18 GHz ≤ f &lt; 25 GHz</td><td>-147 dBm</td></tr> <tr><td>25 GHz ≤ f &lt; 34 GHz</td><td>-144 dBm</td></tr> <tr><td>34 GHz &lt; f ≤ 40 GHz</td><td>-141 dBm</td></tr> <tr><td>40 GHz &lt; f ≤ 43.5 GHz</td><td>-139 dBm</td></tr> <tr><td>43.5 GHz &lt; f ≤ 47 GHz</td><td>-137 dBm</td></tr> <tr><td>47 GHz &lt; f ≤ 49 GHz</td><td>-135 dBm</td></tr> <tr><td>49 GHz &lt; f ≤ 50 GHz</td><td>-133 dBm</td></tr> </table>	2 Hz ≤ f ≤ 100 Hz	-110 dBm	100 Hz < f ≤ 1 kHz	-120 dBm	1 kHz < f < 9 kHz	-135 dBm	9 kHz ≤ f ≤ 1 MHz	-145 dBm	1 MHz < f ≤ 1 GHz	-149 dBm	1 GHz < f < 3 GHz <sup>9</sup>	-150 dBm	1 GHz < f < 3 GHz <sup>10</sup>	-153 dBm	3 GHz ≤ f < 8 GHz	-150 dBm	8 GHz ≤ f < 13.6 GHz	-148 dBm	13.6 GHz ≤ f < 18 GHz	-147 dBm	18 GHz ≤ f < 25 GHz	-145 dBm	25 GHz ≤ f < 34 GHz	-140 dBm	34 GHz < f ≤ 40 GHz	-137 dBm	40 GHz < f ≤ 43.5 GHz	-135 dBm	43.5 GHz < f ≤ 47 GHz	-133 dBm	47 GHz < f ≤ 49 GHz	-131 dBm	49 GHz < f ≤ 50 GHz	-129 dBm	8 GHz ≤ f < 13.6 GHz	-150 dBm	13.6 GHz ≤ f < 18 GHz	-149 dBm	18 GHz ≤ f < 25 GHz	-147 dBm	25 GHz ≤ f < 34 GHz	-144 dBm	34 GHz < f ≤ 40 GHz	-141 dBm	40 GHz < f ≤ 43.5 GHz	-139 dBm	43.5 GHz < f ≤ 47 GHz	-137 dBm	47 GHz < f ≤ 49 GHz	-135 dBm	49 GHz < f ≤ 50 GHz	-133 dBm
2 Hz ≤ f ≤ 100 Hz	-110 dBm																																																				
100 Hz < f ≤ 1 kHz	-120 dBm																																																				
1 kHz < f < 9 kHz	-135 dBm																																																				
9 kHz ≤ f ≤ 1 MHz	-145 dBm																																																				
1 MHz < f ≤ 1 GHz	-149 dBm																																																				
1 GHz < f < 3 GHz <sup>9</sup>	-150 dBm																																																				
1 GHz < f < 3 GHz <sup>10</sup>	-153 dBm																																																				
3 GHz ≤ f < 8 GHz	-150 dBm																																																				
8 GHz ≤ f < 13.6 GHz	-148 dBm																																																				
13.6 GHz ≤ f < 18 GHz	-147 dBm																																																				
18 GHz ≤ f < 25 GHz	-145 dBm																																																				
25 GHz ≤ f < 34 GHz	-140 dBm																																																				
34 GHz < f ≤ 40 GHz	-137 dBm																																																				
40 GHz < f ≤ 43.5 GHz	-135 dBm																																																				
43.5 GHz < f ≤ 47 GHz	-133 dBm																																																				
47 GHz < f ≤ 49 GHz	-131 dBm																																																				
49 GHz < f ≤ 50 GHz	-129 dBm																																																				
8 GHz ≤ f < 13.6 GHz	-150 dBm																																																				
13.6 GHz ≤ f < 18 GHz	-149 dBm																																																				
18 GHz ≤ f < 25 GHz	-147 dBm																																																				
25 GHz ≤ f < 34 GHz	-144 dBm																																																				
34 GHz < f ≤ 40 GHz	-141 dBm																																																				
40 GHz < f ≤ 43.5 GHz	-139 dBm																																																				
43.5 GHz < f ≤ 47 GHz	-137 dBm																																																				
47 GHz < f ≤ 49 GHz	-135 dBm																																																				
49 GHz < f ≤ 50 GHz	-133 dBm																																																				
RF preamplifier = 30 dB	<p>RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on</p> <table> <tr><td>100 kHz &lt; f ≤ 1 MHz</td><td>-160 dBm</td></tr> <tr><td>1 MHz &lt; f ≤ 3 GHz</td><td>-165 dBm</td></tr> <tr><td>3 GHz &lt; f ≤ 8 GHz</td><td>-162 dBm</td></tr> <tr><td>8 GHz &lt; f ≤ 18 GHz</td><td>-162 dBm</td></tr> <tr><td>18 GHz &lt; f ≤ 26.5 GHz</td><td>-161 dBm</td></tr> <tr><td>26.5 GHz &lt; f ≤ 40 GHz</td><td>-160 dBm</td></tr> </table> <p>R&amp;S®FSW-B24 option, model .49</p> <table> <tr><td>40 GHz &lt; f ≤ 43 GHz</td><td>-157 dBm</td></tr> <tr><td>43 GHz &lt; f ≤ 50 GHz</td><td>-149 dBm</td></tr> </table> <p>R&amp;S®FSW-B24 option, model .51</p> <table> <tr><td>40 GHz &lt; f ≤ 43.5 GHz</td><td>-157 dBm</td></tr> <tr><td>43.5 GHz &lt; f ≤ 47 GHz</td><td>-155 dBm</td></tr> <tr><td>47 GHz &lt; f ≤ 50 GHz</td><td>-153 dBm</td></tr> </table> <p>add 1 dB to the above values for frequencies &lt; 8 GHz, if the R&amp;S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed</p>	100 kHz < f ≤ 1 MHz	-160 dBm	1 MHz < f ≤ 3 GHz	-165 dBm	3 GHz < f ≤ 8 GHz	-162 dBm	8 GHz < f ≤ 18 GHz	-162 dBm	18 GHz < f ≤ 26.5 GHz	-161 dBm	26.5 GHz < f ≤ 40 GHz	-160 dBm	40 GHz < f ≤ 43 GHz	-157 dBm	43 GHz < f ≤ 50 GHz	-149 dBm	40 GHz < f ≤ 43.5 GHz	-157 dBm	43.5 GHz < f ≤ 47 GHz	-155 dBm	47 GHz < f ≤ 50 GHz	-153 dBm																														
100 kHz < f ≤ 1 MHz	-160 dBm																																																				
1 MHz < f ≤ 3 GHz	-165 dBm																																																				
3 GHz < f ≤ 8 GHz	-162 dBm																																																				
8 GHz < f ≤ 18 GHz	-162 dBm																																																				
18 GHz < f ≤ 26.5 GHz	-161 dBm																																																				
26.5 GHz < f ≤ 40 GHz	-160 dBm																																																				
40 GHz < f ≤ 43 GHz	-157 dBm																																																				
43 GHz < f ≤ 50 GHz	-149 dBm																																																				
40 GHz < f ≤ 43.5 GHz	-157 dBm																																																				
43.5 GHz < f ≤ 47 GHz	-155 dBm																																																				
47 GHz < f ≤ 50 GHz	-153 dBm																																																				
Improvement with noise cancellation	<p>for noise-like signals</p> <p>R&amp;S®FSW-B24 option, model .49</p> <table> <tr><td>100 kHz &lt; f ≤ 43 GHz</td><td>13 dB (nom.)</td></tr> <tr><td>43 GHz &lt; f ≤ 50 GHz</td><td>0 dB (nom.)</td></tr> </table> <p>R&amp;S®FSW-B24 option, model .51</p> <table> <tr><td>100 kHz &lt; f ≤ 50 GHz</td><td>13 dB (nom.)</td></tr> </table>	100 kHz < f ≤ 43 GHz	13 dB (nom.)	43 GHz < f ≤ 50 GHz	0 dB (nom.)	100 kHz < f ≤ 50 GHz	13 dB (nom.)																																														
100 kHz < f ≤ 43 GHz	13 dB (nom.)																																																				
43 GHz < f ≤ 50 GHz	0 dB (nom.)																																																				
100 kHz < f ≤ 50 GHz	13 dB (nom.)																																																				


<b>Displayed average noise level of the R&amp;S®FSW67 without R&amp;S®FSW-B24 option</b>	
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on
9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm
1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm
1 GHz < f < 3 GHz <sup>9</sup>	-151 dBm, typ. -156 dBm
1 GHz < f < 3 GHz <sup>10</sup>	-154 dBm, typ. -159 dBm
3 GHz ≤ f < 8 GHz	-151 dBm, typ. -156 dBm
8 GHz ≤ f < 13.6 GHz	-146 dBm, typ. -150 dBm
13.6 GHz ≤ f < 18 GHz	-144 dBm, typ. -148 dBm
18 GHz ≤ f < 23 GHz	-141 dBm, typ. -145 dBm
23 GHz ≤ f < 30 GHz	-137 dBm, typ. -141 dBm
30 GHz ≤ f < 34 GHz	-135 dBm, typ. -139 dBm
34 GHz < f ≤ 43.5 GHz	-131 dBm, typ. -135 dBm
43.5 GHz < f ≤ 47 GHz	-127 dBm, typ. -131 dBm
47 GHz < f ≤ 49 GHz	-124 dBm, typ. -128 dBm
49 GHz < f ≤ 50 GHz	-122 dBm, typ. -126 dBm
50 GHz < f ≤ 55 GHz	-141 dBm, typ. -143 dBm
55 GHz < f ≤ 62 GHz	-137 dBm, typ. -139 dBm
62 GHz < f ≤ 67 GHz	-133 dBm, typ. -135 dBm
	add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off
8 GHz ≤ f < 13.6 GHz	-148 dBm, typ. -152 dBm
13.6 GHz ≤ f < 18 GHz	-146 dBm, typ. -150 dBm
18 GHz ≤ f < 23 GHz	-143 dBm, typ. -147 dBm
23 GHz ≤ f < 30 GHz	-139 dBm, typ. -142 dBm
30 GHz ≤ f < 34 GHz	-137 dBm, typ. -140 dBm
34 GHz < f ≤ 43.5 GHz	-133 dBm, typ. -136 dBm
43.5 GHz < f ≤ 47 GHz	-129 dBm, typ. -132 dBm
47 GHz < f ≤ 49 GHz	-126 dBm, typ. -129 dBm
49 GHz < f ≤ 50 GHz	-125 dBm, typ. -128 dBm
50 GHz < f ≤ 55 GHz	-141 dBm, typ. -142 dBm
55 GHz < f ≤ 62 GHz	-137 dBm, typ. -139 dBm
62 GHz < f ≤ 67 GHz	-133 dBm, typ. -135 dBm
Improvement with noise cancellation	for noise-like signals
	2 Hz < f ≤ 43 GHz
	43 GHz < f ≤ 67 GHz
	13 dB (nom.)
	8 dB (nom.)

<b>Displayed average noise level of the R&amp;S®FSW67 with R&amp;S®FSW-B24 option</b>	
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
2 Hz ≤ f ≤ 100 Hz	−110 dBm
100 Hz < f ≤ 1 kHz	−120 dBm
1 kHz < f < 9 kHz	−135 dBm
RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
9 kHz ≤ f ≤ 1 MHz	−145 dBm
1 MHz < f ≤ 1 GHz	−149 dBm
1 GHz < f < 3 GHz <sup>9</sup>	−150 dBm
1 GHz < f < 3 GHz <sup>10</sup>	−153 dBm
3 GHz ≤ f < 8 GHz	−150 dBm
8 GHz ≤ f < 13.6 GHz	−144 dBm
13.6 GHz ≤ f < 18 GHz	−142 dBm
18 GHz ≤ f < 23 GHz	−139 dBm
23 GHz ≤ f < 30 GHz	−135 dBm
30 GHz ≤ f < 34 GHz	−132 dBm
34 GHz < f ≤ 43.5 GHz	−128 dBm
43.5 GHz < f ≤ 47 GHz	−124 dBm
47 GHz < f ≤ 49 GHz	−121 dBm
49 GHz < f ≤ 50 GHz	−119 dBm
50 GHz < f ≤ 55 GHz	−138 dBm
55 GHz < f ≤ 62 GHz	−134 dBm
62 GHz < f ≤ 67 GHz	−130 dBm
add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed	
RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off	
8 GHz ≤ f < 13.6 GHz	−146 dBm
13.6 GHz ≤ f < 18 GHz	−144 dBm
18 GHz ≤ f < 23 GHz	−141 dBm
23 GHz ≤ f < 30 GHz	−137 dBm
30 GHz ≤ f < 34 GHz	−134 dBm
34 GHz < f ≤ 43.5 GHz	−130 dBm
43.5 GHz < f ≤ 47 GHz	−126 dBm
47 GHz < f ≤ 49 GHz	−123 dBm
49 GHz < f ≤ 50 GHz	−122 dBm
50 GHz < f ≤ 55 GHz	−138 dBm
55 GHz < f ≤ 62 GHz	−134 dBm
62 GHz < f ≤ 67 GHz	−130 dBm

RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = $50 \Omega$ , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on	
	100 kHz < f ≤ 1 MHz	-160 dBm
	1 MHz < f ≤ 3 GHz	-165 dBm
	3 GHz < f ≤ 8 GHz	-162 dBm
	8 GHz < f ≤ 18 GHz	-161 dBm
	18 GHz < f ≤ 26.5 GHz	-160 dBm
	26.5 GHz < f ≤ 35 GHz	-159 dBm
	35 GHz < f ≤ 42 GHz	-157 dBm
	R&S®FSW-B24 option, model .66	
	42 GHz < f ≤ 43 GHz	-150 dBm
Improvement with noise cancellation	43 GHz < f ≤ 47 GHz	-146 dBm
	47 GHz < f ≤ 50 GHz	-144 dBm
	50 GHz < f ≤ 54 GHz	-148 dBm
	54 GHz < f ≤ 56 GHz	-146 dBm
	56 GHz < f ≤ 62 GHz	-144 dBm
	62 GHz < f ≤ 65 GHz	-142 dBm
	65 GHz < f ≤ 67 GHz	-140 dBm
	R&S®FSW-B24 option, model .67	
	42 GHz < f ≤ 47 GHz	-150 dBm
	47 GHz < f ≤ 50 GHz	-146 dBm
	50 GHz < f ≤ 52 GHz	-154 dBm
	52 GHz < f ≤ 54 GHz	-152 dBm
	54 GHz < f ≤ 62 GHz	-150 dBm
	62 GHz < f ≤ 67 GHz	-147 dBm
add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed		
for noise-like signals		
R&S®FSW-B24 option, model .66		
100 kHz < f ≤ 43 GHz	13 dB (nom.)	
43 GHz < f ≤ 67 GHz	0 dB (nom.)	
R&S®FSW-B24 option, model .67		
100 kHz < f ≤ 67 GHz	13 dB (nom.)	


Displayed average noise level of the R&S®FSW85	
	RF input 1, RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
2 Hz ≤ f ≤ 100 Hz	-105 dBm, typ. -115 dBm
100 Hz < f ≤ 1 kHz	-110 dBm, typ. -120 dBm
1 kHz < f < 9 kHz	-125 dBm, typ. -137 dBm
RF input 1, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
9 kHz ≤ f ≤ 1 MHz	-135 dBm, typ. -140 dBm
1 MHz < f ≤ 1 GHz	-145 dBm, typ. -150 dBm
1 GHz < f < 3 GHz <sup>9</sup>	-151 dBm, typ. -156 dBm
1 GHz < f < 3 GHz <sup>10</sup>	-154 dBm, typ. -159 dBm
3 GHz ≤ f < 8 GHz	-151 dBm, typ. -156 dBm
8 GHz ≤ f < 13.6 GHz	-146 dBm, typ. -150 dBm
13.6 GHz ≤ f < 18 GHz	-144 dBm, typ. -148 dBm
18 GHz ≤ f < 23 GHz	-141 dBm, typ. -145 dBm
23 GHz ≤ f < 30 GHz	-137 dBm, typ. -141 dBm
30 GHz ≤ f < 34 GHz	-135 dBm, typ. -139 dBm
34 GHz < f ≤ 44 GHz	-129 dBm, typ. -133 dBm
44 GHz < f ≤ 58 GHz	-137 dBm, typ. -141 dBm
58 GHz < f ≤ 70 GHz	-132 dBm, typ. -136 dBm
70 GHz < f ≤ 75 GHz	-127 dBm, typ. -130 dBm
75 GHz < f ≤ 80 GHz	-122 dBm, typ. -125 dBm
80 GHz < f ≤ 85 GHz	-120 dBm, typ. -123 dBm
add 2 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 option is installed	
RF input 1, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, R&S®FSW-B90G option for f > 85 GHz	
8 GHz ≤ f < 13.6 GHz	-148 dBm
13.6 GHz ≤ f < 18 GHz	-146 dBm
18 GHz ≤ f < 23 GHz	-143 dBm
23 GHz ≤ f < 30 GHz	-139 dBm
30 GHz ≤ f < 34 GHz	-137 dBm
34 GHz < f ≤ 44 GHz	-131 dBm
44 GHz < f ≤ 58 GHz	-147 dBm
58 GHz < f ≤ 70 GHz	-143 dBm
70 GHz < f ≤ 78 GHz	-135 dBm
78 GHz < f ≤ 85 GHz	-130 dBm
85 GHz < f ≤ 88 GHz	-125 dBm
88 GHz < f ≤ 90 GHz	-120 dBm
RF input 2, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C	
add 1 dB to the above values for frequencies > 44 GHz	
Improvement with noise cancellation	for noise-like signals
	f ≤ 43 GHz
	13 dB (nom.)
	f > 43 GHz
	YIG preselector on
	13 dB (nom.)
	YIG preselector off
	0 dB (nom.)

dBm

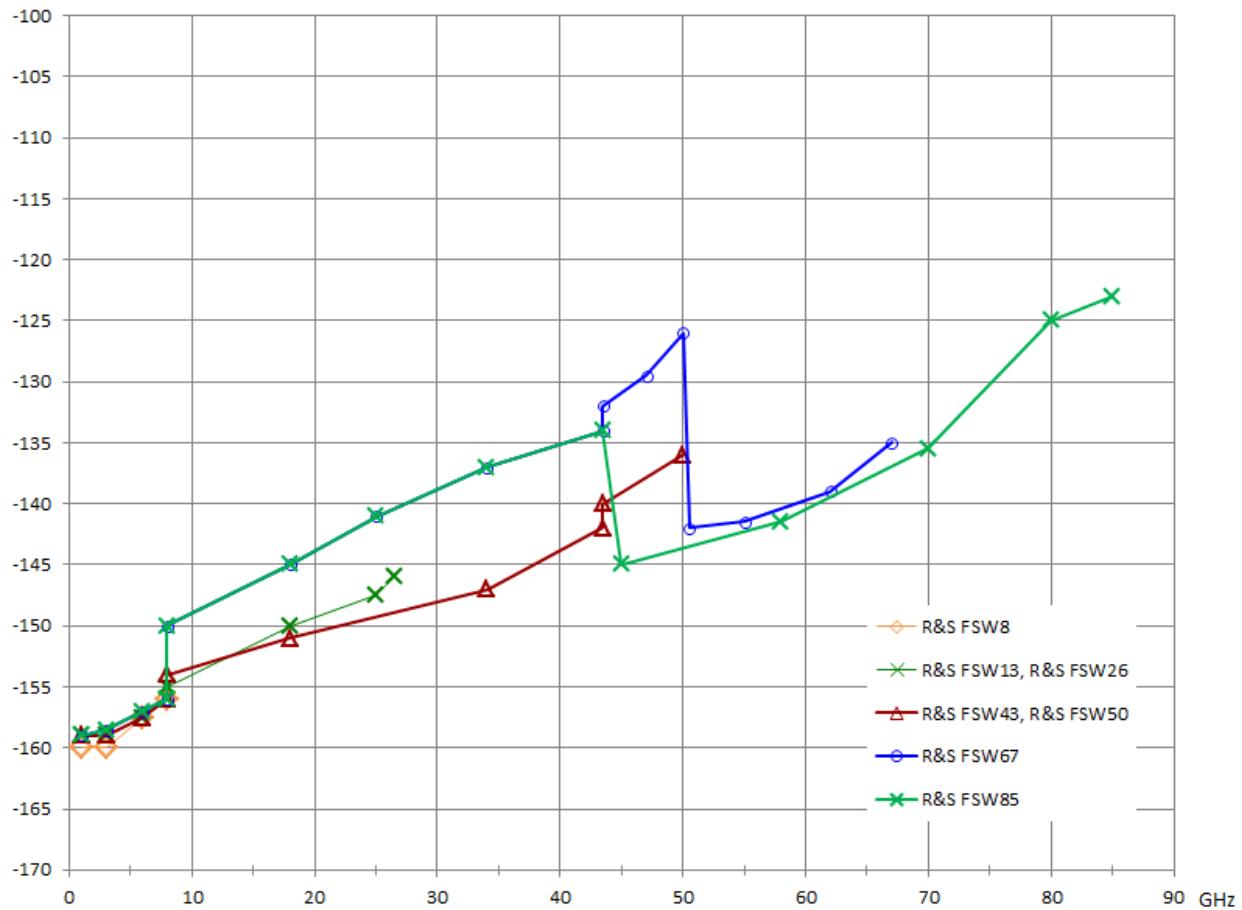

Typical displayed average noise level of the R&S®FSW models for  $f > 1$  GHz without R&S®FSW-B24 RF preamplifier option

dBm

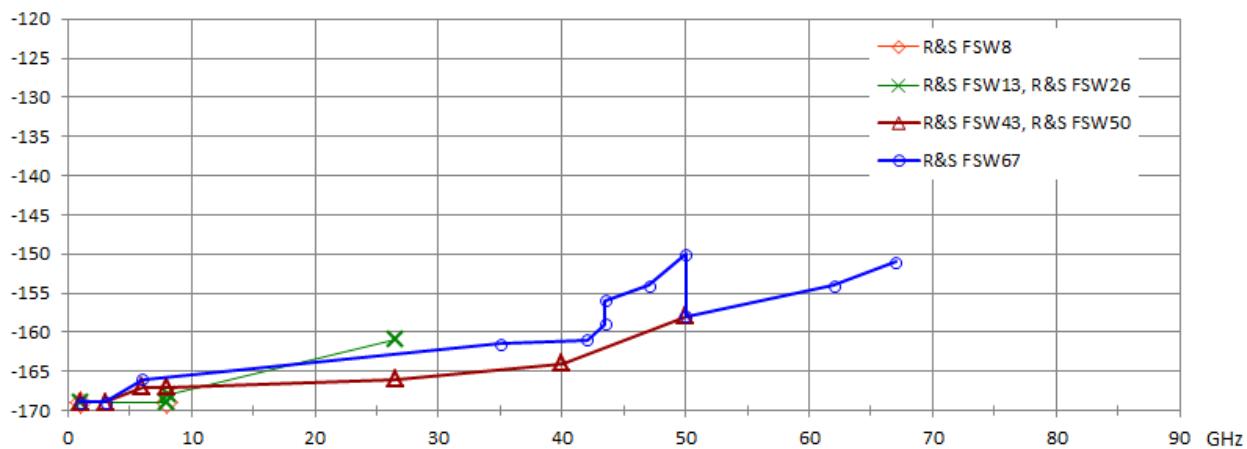

Typical displayed average noise level of the R&S®FSW models for  $f > 1$  GHz with R&S®FSW-B24<sup>12</sup> RF preamplifier option,  
preamplifier gain = 30 dB

<sup>12</sup> For frequencies > 43 GHz, the curve shown for the R&S®FSW50 applies to the R&S®FSW-B24 option model .51, the curve shown for the R&S®FSW67 applies to the R&S®FSW-B24 option model .67.

## Spurious responses

<b>Spurious responses</b>	YIG preselector on for $f \geq 8$ GHz, mixer level $\leq -10$ dBm <sup>13</sup> , sweep type: auto, sweep optimization: auto or dynamic	
Image response	$f_{in} - 2 \times 8997$ MHz (1st IF)	< -90 dBc
	$f_{in} - 2 \times 1317$ MHz (2nd IF)	< -90 dBc
	$f_{in} - 2 \times 37$ MHz (3rd IF)	< -90 dBc
	$f_{in}$ = external interfering signal frequency	
Intermediate frequency response	$f_{in}$ = 1st IF (8997 MHz)	< -90 dBc
	$f_{in}$ = 2nd IF (1317 MHz)	< -90 dBc
	$f_{in}$ = 3rd IF (37 MHz)	< -90 dBc
	$f_{in}$ = external interfering signal frequency	
Residual spurious response	RF attenuation = 0 dB	
	$f \leq 1$ MHz	< -90 dBm
	1 MHz < $f \leq 8900$ MHz	< -110 dBm
	8900 MHz < $f \leq 26.5$ GHz	< -100 dBm
	26.5 GHz < $f \leq 85$ GHz	< -100 dBm
	$f$ = receive frequency	
Local oscillator related spurious	$f_{in} < 1$ GHz	
	10 Hz $\leq$ offset from carrier < 200 Hz	< -90 dBc
	offset from carrier > 200 Hz	< -100 dBc
	$f_{in} \geq 1$ GHz	
	10 Hz $\leq$ offset from carrier < 200 Hz	< -90 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	offset from carrier > 200 Hz	
	$f \leq 50$ GHz	< -100 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	$f > 50$ GHz, RBW $\leq 10$ kHz	< -100 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	$f > 50$ GHz, RBW > 10 kHz	< -80 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	$f$ = receive frequency	
Vibrational environmental stimuli	max. 0.21 g RMS	< -60 dBc + 20 log ( $f_{in}/\text{GHz}$ ) (nom.)

<sup>13</sup> Mixer level = signal level – RF attenuation + preamplifier gain.

## Level measurement uncertainty

Absolute level uncertainty at 64 MHz	RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB without R&S®FSW-B25 option or electronic attenuator off	< 0.2 dB ( $\sigma = 0.07$ dB)
	with R&S®FSW-B25 option, electronic attenuator on	< 0.4 dB ( $\sigma = 0.14$ dB)
Frequency response, referenced to 64 MHz, YIG preselector on	RF attenuation = 10/20/30/40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off  2 Hz ≤ f < 9 kHz 9 kHz ≤ f < 10 MHz 10 MHz ≤ f < 3.6 GHz <sup>14</sup> 10 MHz ≤ f < 3.6 GHz <sup>15</sup> 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 22 GHz, span < 1 GHz 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 50 GHz, span < 1 GHz 50 GHz < f ≤ 67 GHz, span < 1 GHz 67 GHz < f ≤ 85 GHz, span < 1 GHz  any RF attenuation or electronic attenuator on, +15 °C to +40 °C 2 Hz ≤ f < 9 kHz 9 kHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 22 GHz, span < 1 GHz 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 50 GHz, span < 1 GHz 50 GHz < f ≤ 67 GHz, span < 1 GHz 67 GHz < f ≤ 85 GHz, span < 1 GHz  RF attenuation ≤ 20 dB, RF preamplifier on, +20 °C to +30 °C 10 MHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 22 GHz, span < 1 GHz 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 50 GHz, span < 1 GHz 50 GHz < f ≤ 67 GHz, span < 1 GHz	< 1 dB (nom.) < 0.45 dB ( $\sigma = 0.17$ dB) < 0.3 dB ( $\sigma = 0.10$ dB) < 0.5 dB ( $\sigma = 0.17$ dB) < 0.5 dB ( $\sigma = 0.17$ dB) < 1.5 dB ( $\sigma = 0.50$ dB) < 2 dB ( $\sigma = 0.67$ dB) < 2.5 dB ( $\sigma = 0.83$ dB) < 3.0 dB ( $\sigma = 1.0$ dB) < 3.5 dB ( $\sigma = 1.17$ dB) < 1 dB (nom.) < 0.6 dB ( $\sigma = 0.20$ dB) < 0.8 dB ( $\sigma = 0.27$ dB) < 2 dB ( $\sigma = 0.67$ dB) < 2.5 dB ( $\sigma = 0.83$ dB) < 3 dB ( $\sigma = 1.0$ dB) < 3.5 dB ( $\sigma = 1.17$ dB) < 0.6 dB ( $\sigma = 0.2$ dB) < 0.8 dB ( $\sigma = 0.27$ dB) < 2 dB ( $\sigma = 0.67$ dB) < 2.5 dB ( $\sigma = 0.83$ dB) < 3 dB ( $\sigma = 1.0$ dB) < 3.5 dB ( $\sigma = 1.17$ dB)
Frequency response, referenced to 64 MHz, YIG preselector off (requires R&S®FSW-B90G option for f > 85 GHz)	RF attenuation = 10/20/30/40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off  f < 8 GHz 8 GHz ≤ f < 22 GHz 22 GHz ≤ f ≤ 26.5 GHz 26.5 GHz < f ≤ 67 GHz, span < 1 GHz 67 GHz < f ≤ 90 GHz, span < 1 GHz  any RF attenuation or electronic attenuator on, +15 °C to +40 °C f < 8 GHz 8 GHz ≤ f < 22 GHz 22 GHz ≤ f ≤ 26.5 GHz 26.5 GHz < f ≤ 67 GHz, span < 1 GHz 67 GHz < f ≤ 90 GHz, span < 1 GHz  RF attenuation ≤ 20 dB, RF preamplifier on, +20 °C to +30 °C f < 8 GHz 8 GHz ≤ f < 22 GHz 22 GHz ≤ f ≤ 26.5 GHz 26.5 GHz < f ≤ 67 GHz, span < 1 GHz	same values as with preselector on < 1.5 dB ( $\sigma = 0.5$ dB) < 2 dB ( $\sigma = 0.6$ dB) < 2.5 dB ( $\sigma = 0.83$ dB) < 3 dB ( $\sigma = 1.0$ dB) same values as with preselector on < 2 dB ( $\sigma = 0.6$ dB) < 2.5 dB ( $\sigma = 0.75$ dB) < 3 dB ( $\sigma = 1.0$ dB) < 3.5 dB ( $\sigma = 1.17$ dB) same values as with preselector on < 2 dB ( $\sigma = 0.6$ dB) < 2.5 dB ( $\sigma = 0.75$ dB) < 3 dB ( $\sigma = 1.0$ dB)
Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ( $\sigma = 0.07$ dB)
Uncertainty of reference level setting	input mixer level ≤ -15 dBm	0 dB <sup>16</sup>
Bandwidth switching uncertainty	input mixer level > -15 dBm referenced to RBW = 10 kHz	< 0.1 dB (nom.) < 0.1 dB ( $\sigma = 0.04$ dB) <sup>17</sup>

<sup>14</sup> With R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67.<sup>15</sup> With R&S®FSW85.<sup>16</sup> The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself.

The reference level setting causes no additional uncertainty in measurement results.

<sup>17</sup> Nominal values for RBW = 3.9 kHz and RBW = 6.25 kHz.

<b>Nonlinearity of displayed level</b>		
Logarithmic level display	S/N > 16 dB, 0 dB ≤ level ≤ -70 dB	< 0.1 dB ( $\sigma = 0.04$ dB)
	S/N > 16 dB, -70 dB < level ≤ -90 dB	< 0.2 dB ( $\sigma = 0.08$ dB)
Linear level display	S/N > 16 dB, 0 dB to -70 dB	< 5 % of reference level (nom.)

<b>Total measurement uncertainty</b>		
YIG preselector on	signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz ≤ f ≤ 10 MHz	±0.37 dB
	10 MHz < f ≤ 3.6 GHz	±0.27 dB
	3.6 GHz < f ≤ 8 GHz	±0.37 dB
	8 GHz < f ≤ 22 GHz	±1.4 dB
	22 GHz < f ≤ 26.5 GHz	±1.7 dB
	26.5 GHz < f ≤ 50 GHz	±2.5 dB
	50 GHz < f ≤ 67 GHz	±2.8 dB
	67 GHz < f ≤ 85 GHz	±3.1 dB
YIG preselector off (requires R&S®FSW-B90G option for f > 85 GHz)	signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	8 GHz ≤ f ≤ 22 GHz	±1.0 dB
	22 GHz < f ≤ 26.5 GHz	±1.2 dB
	26.5 GHz < f ≤ 67 GHz	±1.7 dB
	67 GHz < f ≤ 90 GHz	±2.0 dB

## Adjacent channel power dynamic range

Adjacent channel leakage ratio (ACLR)	3GPP WCDMA, single carrier, 1 DPCH, carrier frequency = 2 GHz	
	noise cancellation off <sup>18</sup>	
	1st adjacent channel	-76 dB (nom.)
	2nd adjacent channel	-82 dB (nom.)
	noise cancellation on	
	1st adjacent channel	-88 dB (nom.)
	2nd adjacent channel	-90 dB (nom.)

Optimum mixer level	3GPP WCDMA, single carrier, 1 DPCH, carrier frequency = 2 GHz	
	noise cancellation off	
	1st adjacent channel	-5 dBm (nom.)
	2nd adjacent channel	0 dBm (nom.)
	noise cancellation on	
	1st adjacent channel	-12 dBm (nom.)
	2nd adjacent channel	-5 dBm (nom.)

<sup>18</sup> Noise cancellation off represents the raw performance of the R&S®FSW without numeric compensation for its inherent noise.

## Trigger functions

<b>Trigger</b>		
Trigger source	spectrum analysis	free run, video, external, IF power, RF power, periodic time
	I/Q analyzer or modulation analysis	I/Q trigger additionally <sup>19</sup>
Trigger offset	span ≥ 10 Hz	5 ns to 20 s
	span = 0 Hz	(–sweep time) to 20 s
Minimum trigger offset resolution	span > 0 Hz	5 ns
	span = 0 Hz, trigger offset > 0	5 ns
	span = 0 Hz, trigger offset < 0	sweep time/number of sweep points
Maximum deviation of trigger offset		5 ns
<b>IF power trigger</b>		
Sensitivity	min. signal power	
	spectrum analysis	–60 dBm + RF attenuation – RF preamplifier gain (nom.)
	I/Q analyzer or modulation analysis	
	set analysis bandwidth ≤ 80 MHz	–60 dBm + RF attenuation – RF preamplifier gain (nom.)
	set analysis bandwidth > 80 MHz	–30 dBm + RF attenuation – RF preamplifier gain (nom.)
	max. signal power	–10 dBm + RF attenuation – RF preamplifier gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz	20 MHz (nom.) <sup>20</sup>
	RBW ≤ 500 kHz, FFT	20 MHz (nom.)
	RBW ≤ 500 kHz, swept	6 MHz (nom.)
<b>RF power trigger</b>		
Sensitivity	min. signal power	–30 dBm + RF attenuation – RF preamplifier gain (nom.)
	max. signal power	+10 dBm + RF attenuation – RF preamplifier gain (nom.)
RF power trigger frequency range	f ≤ 8 GHz	8 GHz (nom.)
	f > 8 GHz	center frequency ± 250 MHz (nom.) <sup>21</sup>
<b>Gated sweep</b>		
Gate source		video, external, IF power, RF power
Gate delay		5 ns to 20 s, min. resolution 5 ns
Gate length		5 ns to 20 s, min. resolution 5 ns
Maximum deviation of gate length		±5 ns

## Audio demodulator

<b>Demodulation</b>		
AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

<sup>19</sup> Not available for analysis bandwidth > 160 MHz if the R&S®FSW-B320 option is installed.

<sup>20</sup> Sweep optimization = auto.

<sup>21</sup> YIG preselector off for f ≥ 8 GHz.

## I/Q data

The specifications in this section apply to the base unit and the R&S®FSW-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options.

For specifications of the R&S®FSW-B2000/-B5000 options, see sections "R&S®FSW-B2000 2 GHz analysis bandwidth" and "R&S®FSW-B5000 5 GHz analysis bandwidth".

Record length	standard	
	with R&S®FSW-B40/-B80/-B160/-B512/-B512R options	max. 440 Msample I and Q
	with R&S®FSW-B320 option	max. 195 Msample I and Q
	with R&S®FSW-B1200/-B2001/-B800R options	max. 220 Msample I and Q
	with R&S®FSW-B4001/-B6001/-B8001 options	max. 1039 Msample I and Q
	R&S®FSW-B106 option (requires R&S®FSW-B160/-B320 options)	
	160 MHz analysis bandwidth	max. 1320 Msample I and Q
	320 MHz analysis bandwidth	max. 600 Msample I and Q
	R&S®FSW-B108 option (requires R&S®FSW-B1200/-B2001/-B800R options)	
	512 MHz analysis bandwidth	max. 1800 Msample I and Q
	1000 MHz analysis bandwidth	max. 900 Msample I and Q
	1200 MHz analysis bandwidth	max. 630 Msample I and Q
	2000 MHz analysis bandwidth	max. 900 Msample I and Q
	R&S®FSW-B124 option (requires R&S®FSW-B4001/-B6001/-B8001 options)	
	80 MHz analysis bandwidth	max. 440 Msample I and Q
	512 MHz analysis bandwidth	max. 5600 Msample I and Q
	4400 MHz, 6400 MHz, 8312 MHz analysis bandwidth	max. 6440 Msample I and Q
Word length of I/Q samples	sampling rate ≤ 100 MHz and number of samples ≤ 300 Msample	24 bit
	without R&S®FSW-B4001/-B6001/-B8001 options	
	sampling rate > 100 MHz or number of samples > 300 Msample	18 bit
	with R&S®FSW-B4001/-B6001/-B8001 options	
	sampling rate ≤ 100 MHz and number of samples > 300 Msample	18 bit
	100 MHz < sampling rate < 5.32 GHz	18 bit
	sampling rate ≥ 5.32 GHz	16 bit

Sampling rate	standard, with R&S®FSW-B40/-B80 options	100 Hz to 200 MHz
	with R&S®FSW-B160/-B320 options	100 Hz to 1 GHz
	with R&S®FSW-B512/-B512R options	100 Hz to 1.2 GHz
	with R&S®FSW-B1200 options	100 Hz to 2.4 GHz
	with R&S®FSW-B2001/-B800R options	100 Hz to 2.4 GHz
	with R&S®FSW-B4001/-B6001/-B8001 options	100 Hz to 10.64 GHz
Maximum signal analysis bandwidth (equalized)	standard <sup>4</sup>	28 MHz (nom.) <sup>21</sup>
	with R&S®FSW-B40 option	40 MHz (nom.) <sup>21</sup>
	with R&S®FSW-B80 option	80 MHz (nom.) <sup>21</sup>
	with R&S®FSW-B160 option	160 MHz (nom.) <sup>21</sup>
	with R&S®FSW-B320 option	320 MHz (nom.) <sup>21</sup>
	with R&S®FSW-B512/-B512R option	512 MHz (nom.) <sup>21</sup>
	with R&S®FSW-B1200 option	1200 MHz (nom.) <sup>22</sup>
	with R&S®FSW-B2001/-B800R option	2000 MHz (nom.) <sup>22</sup>
	with R&S®FSW-B4001 option	4400 MHz (nom.) <sup>22</sup>
	with R&S®FSW-B6001 option	6400 MHz (nom.) <sup>22, 23</sup>
	with R&S®FSW-B8001 option	8312 MHz (nom.) <sup>22, 23</sup>

<sup>22</sup> YIG preselector off for  $f \geq 12$  GHz.

<sup>23</sup> Only available for  $f \geq 18$  GHz.

<b>Signal analysis bandwidth <math>\leq</math> 80 MHz</b>		
Amplitude flatness	$(1.25 \times \text{signal analysis BW}) \leq f_{\text{center}} < 8 \text{ GHz}$	$\pm 0.3 \text{ dB} (\text{nom.})$ <sup>24</sup>
	$f_{\text{center}} \geq 8 \text{ GHz}$ , YIG preselector off	$\pm 0.5 \text{ dB} (\text{nom.})$
Deviation from linear phase	$(1.25 \times \text{signal analysis BW}) \leq f_{\text{center}} < 8 \text{ GHz}$	$\pm 1^\circ (\text{nom.})$
	$f_{\text{center}} \geq 8 \text{ GHz}$ , YIG preselector off	$\pm 2^\circ (\text{nom.})$
Nonlinearity of displayed level		see section "Level measurement uncertainty – Nonlinearity of displayed level"
Level measurement uncertainty		see "Total measurement uncertainty – YIG preselector off"
Third-order intermodulation distortion		see "Third-order intercept point (TOI)"
ADC related spurious response	mixer level = $-30 \text{ dBm}$ <sup>25</sup>	
	analysis bandwidth $< 17 \text{ MHz}$	$-100 \text{ dBc} (\text{nom.})$
	$17 \text{ MHz} \leq \text{analysis bandwidth} < 80 \text{ MHz}$	$-80 \text{ dBc} (\text{nom.})$
Other spurious responses		see section "Spurious responses"

<sup>24</sup> For R&S®FSW67 and R&S®FSW85:  $100 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ .

<sup>25</sup> Level of a tone at the input mixer (also abbreviated as mixer level) = signal level – RF attenuation + preamplifier gain.

<b>Signal analysis bandwidth 80 MHz to 160 MHz<sup>26</sup></b>		
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	$150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 0.5 \text{ dB}$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$	$\pm 0.7 \text{ dB}$ (nom.)
	$8 \text{ GHz} \leq f_{\text{center}} < 26.5 \text{ GHz}$	$\pm 1 \text{ dB}$ (nom.)
	$26.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2 \text{ dB}$ (nom.)
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{27}$	$\pm 2.5 \text{ dB}$ (nom.)
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	$150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1^\circ$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$	$\pm 2^\circ$ (nom.)
	$8 \text{ GHz} \leq f_{\text{center}} < 43.5 \text{ GHz}$	$\pm 1.5^\circ$ (nom.)
	$43.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2^\circ$ (nom.)
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{27}$	$\pm 8^\circ$ (nom.)
Nonlinearity of displayed level	0 dB to -70 dB	< 0.15 dB (nom.)
Level measurement uncertainty at center frequency		add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"
Third-order intermodulation distortion	reference level = signal level + 6 dB	
	$150 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ : two -20 dBm tones at input mixer within analysis bandwidth <sup>25</sup> , $f_{\text{center}} \geq 8 \text{ GHz}$ : two -30 dBm tones at input mixer within analysis bandwidth <sup>25</sup>	-75 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $f_{\text{center}} \geq 150$ MHz	-90 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = -10 dBm <sup>25</sup> , reference level = signal level, $f_{\text{center}} \geq 150$ MHz	-78 dBc (nom.)
Other spurious responses		see section "Spurious responses"

<b>Signal analysis bandwidth <math>\leq 96</math> MHz within R&amp;S®FSW-K193 DOCSIS 3.1 OFDM upstream option<sup>28</sup></b>		
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off	
	$5 \text{ MHz} \leq f \leq 204 \text{ MHz}$	$\pm 0.6 \text{ dB}$ (nom.)
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off	
	$5 \text{ MHz} \leq f \leq 204 \text{ MHz}$	$\pm 2^\circ$ (nom.)
Nonlinearity of displayed level	0 dB to -70 dB	< 0.15 dB (nom.)
Level measurement uncertainty at center frequency		add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"
Third-order intermodulation distortion	reference level = signal level + 6 dB	
	$5 \text{ MHz} \leq f \leq 204 \text{ MHz}$ : two -20 dBm tones at input mixer within analysis bandwidth <sup>25</sup>	-75 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$	-90 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = -10 dBm <sup>25</sup> , reference level = signal level, $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$	-78 dBc (nom.)
Other spurious responses		see section "Spurious responses"

<sup>26</sup> The specifications for 80 MHz to 160 MHz analysis bandwidth in this section apply to the following options: R&S®FSW-B160, R&S®FSW-B320.

<sup>27</sup>  $f_{\text{center}} > 85$  GHz requires R&S®FSW-B90G option.

<sup>28</sup> The specifications in this section apply in combination with the R&S®FSW-B320 option or R&S®FSW-B512 option.

Signal analysis bandwidth 160 MHz to 320 MHz <sup>29</sup>		
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	$200 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 0.7 \text{ dB}$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} < 7 \text{ GHz}$	$\pm 1.2 \text{ dB}$ (nom.)
	$7 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$ <sup>30</sup>	$\pm 1.4 \text{ dB}$ (nom.)
	$8 \text{ GHz} \leq f_{\text{center}} < 22 \text{ GHz}$	$\pm 1.6 \text{ dB}$ (nom.)
	$22 \text{ GHz} \leq f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 2 \text{ dB}$ (nom.)
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2.5 \text{ dB}$ (nom.)
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}$ <sup>27</sup>	$\pm 2.5 \text{ dB}$ (nom.)
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	$200 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 2.5^\circ$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$ <sup>30</sup>	$\pm 4^\circ$ (nom.)
	$8 \text{ GHz} \leq f_{\text{center}} < 43.5 \text{ GHz}$	$\pm 2.5^\circ$ (nom.)
	$43.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 4^\circ$ (nom.)
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}$ <sup>27</sup>	$\pm 8^\circ$ (nom.)
Nonlinearity of displayed level	0 dB to -70 dB	
Level measurement uncertainty at center frequency	add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"	
Third-order intermodulation distortion	reference level = signal level + 6 dB	
	$200 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ : two -20 dBm tones at input mixer within analysis bandwidth <sup>25</sup> , $f_{\text{center}} \geq 8 \text{ GHz}$ : two -30 dBm tones at input mixer within analysis bandwidth <sup>25</sup>	-75 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $f_{\text{center}} \geq 200$ MHz	-90 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = -10 dBm <sup>25</sup> , reference level = signal level	
	$200 \text{ MHz} \leq f_{\text{center}} \leq 460 \text{ MHz}$	-70 dBc (nom.)
	$f_{\text{center}} > 460 \text{ MHz}$	-72 dBc (nom.)
Other spurious responses	see section "Spurious responses"	

<sup>29</sup> The specifications for 160 MHz to 320 MHz analysis bandwidth in this section apply to the R&S®FSW-B320 option.<sup>30</sup> To obtain the set analysis bandwidth,  $(f_{\text{center}} + \frac{1}{2} \text{ analysis bandwidth}) \leq 8 \text{ GHz}$  must be met.

Signal analysis bandwidth 80 MHz to 512 MHz with R&S®FSW-B512 option or R&S®FSW-B512R option		
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz analysis bandwidth $\leq 160$ MHz $150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$ $\pm 0.4 \text{ dB}$ (nom.) $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$ $\pm 0.6 \text{ dB}$ (nom.) analysis bandwidth $\leq 500$ MHz $260 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$ $\pm 0.5 \text{ dB}$ (nom.) $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$ <sup>30</sup> $\pm 0.7 \text{ dB}$ (nom.) analysis bandwidth $\leq 512$ MHz $460 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$ $\pm 0.5 \text{ dB}$ (nom.) $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$ <sup>30</sup> $\pm 0.7 \text{ dB}$ (nom.) any analysis bandwidth $8 \text{ GHz} < f_{\text{center}} \leq 26.5 \text{ GHz}$ $\pm 1.0 \text{ dB}$ (nom.) $26.5 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$ $\pm 1.5 \text{ dB}$ (nom.) $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$ $\pm 2 \text{ dB}$ (nom.) $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}$ <sup>27</sup> $\pm 2.5 \text{ dB}$ (nom.)	
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz analysis bandwidth $\leq 160$ MHz $150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$ $\pm 1^\circ$ (nom.) $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$ $\pm 2^\circ$ (nom.) $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$ $\pm 1.5^\circ$ (nom.) $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$ $\pm 2^\circ$ (nom.) $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}$ <sup>27</sup> $\pm 8^\circ$ (nom.) analysis bandwidth $\leq 500$ MHz $260 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$ $\pm 1.5^\circ$ (nom.) $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$ $\pm 2^\circ$ (nom.) $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$ $\pm 3^\circ$ (nom.) $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$ $\pm 5^\circ$ (nom.) $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}$ <sup>27</sup> $\pm 8^\circ$ (nom.) analysis bandwidth $\leq 512$ MHz $460 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$ $\pm 1.5^\circ$ (nom.) $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$ $\pm 2^\circ$ (nom.) $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$ $\pm 3^\circ$ (nom.) $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$ $\pm 5^\circ$ (nom.) $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}$ <sup>27</sup> $\pm 8^\circ$ (nom.)	
Nonlinearity of displayed level	0 dB to -70 dB	
Level measurement uncertainty at center frequency	add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"	
Third-order intermodulation distortion	reference level = signal level + 6 dB $f_{\text{center}} \leq 8 \text{ GHz}$ : two -20 dBm tones at input mixer within analysis bandwidth <sup>25</sup> $f_{\text{center}} > 8 \text{ GHz}$ : two -25 dBm tones at input mixer within analysis bandwidth <sup>25</sup> , YIG preselector off	
Residual spurious response	RF attenuation 0 dB, analysis bandwidth $\leq 160$ MHz and $f_{\text{center}} \geq 150$ MHz, or analysis bandwidth $\leq 512$ MHz and $f_{\text{center}} \geq 650$ MHz, YIG preselector off for $f \geq 8$ GHz	
ADC related spurious response	single tone at center frequency single tone within analysis bandwidth, mixer level = -15 dBm <sup>25</sup> , reference level = signal level, analysis bandwidth $\leq 160$ MHz and $f_{\text{center}} \geq 150$ MHz, or analysis bandwidth $\leq 512$ MHz and $f_{\text{center}} \geq 260$ MHz, YIG preselector off for $f \geq 8$ GHz	
Other spurious responses	see section "Spurious responses"	

<b>Signal analysis bandwidth 80 MHz to 1200 MHz with R&amp;S®FSW-B1200 option and 80 MHz to 2000 MHz with R&amp;S®FSW-B2001/-B800R option (options available for all models except R&amp;S®FSW8, R&amp;S®FSW13)</b>		
The specifications in this section apply to the following conditions: YIG preselector off for $f \geq 12$ GHz, +20 °C to +30 °C.		
Frequency range (center frequency)	analysis bandwidth = 1200 MHz	650 MHz to maximum receiving frequency – 600 MHz
	analysis bandwidth = 2000 MHz	1050 MHz to maximum receiving frequency – 1000 MHz
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off analysis bandwidth ≤ 1200 MHz 650 MHz <sup>31</sup> ≤ $f_{\text{center}}$ < 8 GHz 8 GHz ≤ $f_{\text{center}}$ < 22 GHz 22 GHz ≤ $f_{\text{center}}$ ≤ 26.5 GHz 26.5 GHz < $f_{\text{center}}$ ≤ 42.9 GHz 42.9 GHz < $f_{\text{center}}$ ≤ 50 GHz 50 GHz < $f_{\text{center}}$ ≤ 67 GHz 67 GHz < $f_{\text{center}}$ ≤ 85 GHz/90 GHz <sup>27</sup>	±1.0 dB, ( $\sigma = 0.33$ dB) ±1.2 dB, ( $\sigma = 0.40$ dB) ±1.4 dB, ( $\sigma = 0.47$ dB) ±1.6 dB, ( $\sigma = 0.53$ dB) ±1.7 dB, ( $\sigma = 0.57$ dB) ±2.0 dB, ( $\sigma = 0.67$ dB) ±2.5 dB, ( $\sigma = 0.83$ dB)
	analysis bandwidth ≤ 2000 MHz 1050 MHz <sup>31</sup> ≤ $f_{\text{center}}$ < 4 GHz 4 GHz ≤ $f_{\text{center}}$ < 42.5 GHz 42.5 GHz < $f_{\text{center}}$ ≤ 66.5 GHz 66.5 GHz < $f_{\text{center}}$ ≤ 85 GHz/90 GHz <sup>32</sup>	±1.0 dB, ( $\sigma = 0.33$ dB) ±2.0 dB, ( $\sigma = 0.67$ dB) ±2.5 dB, ( $\sigma = 0.83$ dB) ±3.0 dB, ( $\sigma = 1.0$ dB)
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off analysis bandwidth ≤ 160 MHz 150 MHz <sup>31</sup> ≤ $f_{\text{center}}$ < 4 GHz 4 GHz ≤ $f_{\text{center}}$ ≤ 8 GHz 8 GHz < $f_{\text{center}}$ ≤ 43.5 GHz 43.5 GHz < $f_{\text{center}}$ ≤ 67 GHz 67 GHz < $f_{\text{center}}$ ≤ 85 GHz analysis bandwidth ≤ 500 MHz 260 MHz <sup>31</sup> ≤ $f_{\text{center}}$ < 4 GHz 4 GHz ≤ $f_{\text{center}}$ ≤ 8 GHz 8 GHz < $f_{\text{center}}$ ≤ 43.5 GHz 43.5 GHz < $f_{\text{center}}$ ≤ 67 GHz 67 GHz < $f_{\text{center}}$ ≤ 85 GHz analysis bandwidth ≤ 512 MHz 460 MHz <sup>31</sup> ≤ $f_{\text{center}}$ < 4 GHz 4 GHz ≤ $f_{\text{center}}$ ≤ 8 GHz 8 GHz < $f_{\text{center}}$ ≤ 43.5 GHz 43.5 GHz < $f_{\text{center}}$ ≤ 67 GHz 67 GHz < $f_{\text{center}}$ ≤ 85 GHz analysis bandwidth ≤ 1200 MHz 650 MHz <sup>31</sup> ≤ $f_{\text{center}}$ < 4 GHz 4 GHz ≤ $f_{\text{center}}$ < 13 GHz 13 GHz ≤ $f_{\text{center}}$ ≤ 37 GHz 37 GHz < $f_{\text{center}}$ ≤ 40 GHz 40.0 GHz < $f_{\text{center}}$ ≤ 42.9 GHz 42.9 GHz < $f_{\text{center}}$ ≤ 85 GHz analysis bandwidth ≤ 2000 MHz 1050 MHz <sup>31</sup> ≤ $f_{\text{center}}$ < 4 GHz 4 GHz ≤ $f_{\text{center}}$ < 13 GHz 13 GHz ≤ $f_{\text{center}}$ ≤ 37 GHz 37 GHz < $f_{\text{center}}$ ≤ 40 GHz 40.0 GHz < $f_{\text{center}}$ ≤ 42.5 GHz 42.5 GHz < $f_{\text{center}}$ ≤ 85 GHz	±1° (nom.) ±2° (nom.) ±1.5° (nom.) ±2° (nom.) ±8° (nom.) ±1.5° (nom.) ±2° (nom.) ±3° (nom.) ±5° (nom.) ±8° (nom.) ±1.5° (nom.) ±2° (nom.) ±3° (nom.) ±5° (nom.) ±8° (nom.) ±2.5° (nom.) ±5° (nom.) ±3.5° (nom.) ±4° (nom.) ±6° (nom.) ±7° (nom.) ±3° (nom.) ±7° (nom.) ±5° (nom.) ±6° (nom.) ±8° (nom.) ±10° (nom.)

<sup>31</sup> For R&S®FSW85 instruments the specification starts at 1 GHz center frequency for analysis bandwidths ≤ 1200 MHz and at 1.5 GHz center frequency for analysis bandwidths > 1200 MHz.

<sup>32</sup>  $f_{\text{center}} > 66.5$  GHz requires R&S®FSW85.  $f_{\text{center}} > 85$  GHz requires R&S®FSW-B90G option.

Nonlinearity of displayed level	0 dB to –70 dB	< 0.15 dB (nom.)
Level measurement uncertainty at center frequency		add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"
Third-order intermodulation distortion	reference level = signal level + 6 dB $f_{center} \leq 8 \text{ GHz}$ : two –20 dBm tones at input mixer within analysis bandwidth <sup>25</sup> , $f_{center} > 8 \text{ GHz}$ : two –25 dBm tones at input mixer within analysis bandwidth <sup>25</sup> , YIG preselector off	–70 dBc (nom.)
Residual spurious response	RF attenuation = 0 dB analysis bandwidth ≤ 160 MHz $f_{center} \geq 150 \text{ MHz}$ analysis bandwidth ≤ 512 MHz $f_{center} \geq 650 \text{ MHz}$ analysis bandwidth ≤ 1200 MHz 700 MHz ≤ $f_{center} < 8.1 \text{ GHz}$ 8.1 GHz ≤ $f_{center} < 9.4 \text{ GHz}$ 9.4 GHz ≤ $f_{center} \leq 12 \text{ GHz}$ 12 GHz < $f_{center} \leq 30 \text{ GHz}$ 30 GHz < $f_{center}$ analysis bandwidth ≤ 2000 MHz 1100 MHz ≤ $f_{center} < 7.75 \text{ GHz}$ 7.75 GHz ≤ $f_{center} < 9.8 \text{ GHz}$ 9.8 GHz ≤ $f_{center} \leq 12 \text{ GHz}$ 12 GHz < $f_{center} \leq 30 \text{ GHz}$ 30 GHz < $f_{center}$	–90 dBm (nom.) –90 dBm (nom.) –80 dBm (nom.) –60 dBm (nom.) –80 dBm (nom.) –90 dBm (nom.) –80 dBm (nom.) –80 dBm (nom.) –80 dBm (nom.) –55 dBm (nom.) –80 dBm (nom.) –90 dBm (nom.) –80 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = –20 dBm <sup>25</sup> , reference level = signal level analysis bandwidth < 200 MHz 200 MHz ≤ analysis bandwidth ≤ 512 MHz 512 MHz < analysis bandwidth ≤ 1200 MHz 1200 MHz < analysis bandwidth ≤ 2000 MHz	–80 dBc (nom.) –75 dBc (nom.) –65 dBc (nom.) –60 dBc (nom.)
Other spurious responses		see section "Spurious responses"

**Signal analysis bandwidth 80 MHz to 4.4 GHz with R&S®FSW-B4001 option, 80 MHz to 6.4 GHz with R&S®FSW-B6001 option and 80 MHz to 8.312 GHz with R&S®FSW-B8001 option (option available only for R&S®FSW43, R&S®FSW50, R&S®FSW67 and R&S®FSW85)**

The specifications in this section apply to the following conditions: YIG preselector off, +20 °C to +30 °C.

Frequency range (center frequency)	analysis bandwidth = 4.4 GHz	
	R&S®FSW43	2.2 GHz to 41.5 GHz
	R&S®FSW50	2.2 GHz to 50.1 GHz
	R&S®FSW67	2.2 GHz to 68 GHz
	R&S®FSW85	2.2 GHz to 84 GHz
	R&S®FSW85 with R&S®FSW-B90G option	2.2 GHz to 86 GHz
	analysis bandwidth = 6.4 GHz	
	R&S®FSW43	18 GHz to 40.5 GHz
	R&S®FSW50	18 GHz to 49.1 GHz
	R&S®FSW67	18 GHz to 57 GHz
	R&S®FSW85	18 GHz to 83 GHz
	R&S®FSW85 with R&S®FSW-B90G option	18 GHz to 86 GHz
	analysis bandwidth = 8.312 GHz	
	R&S®FSW43	18.5 GHz to 39.5 GHz
	R&S®FSW50	18.5 GHz to 48.1 GHz
	R&S®FSW67	18.5 GHz to 57 GHz
	R&S®FSW85	18.5 GHz to 82 GHz
	R&S®FSW85 with R&S®FSW-B90G option	18.5 GHz to 85.8 GHz
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off	
	analysis bandwidth ≤ 8312 MHz	
	2100 MHz ≤ $f_{\text{center}}$ < 5 GHz	±1.5 dB, ( $\sigma = 0.50$ dB)
	5 GHz ≤ $f_{\text{center}}$ ≤ 43.5 GHz	±2.5 dB, ( $\sigma = 0.83$ dB)
Deviation from linear phase	43.5 GHz < $f_{\text{center}}$ ≤ max. center frequency <sup>33</sup>	±3.0 dB, ( $\sigma = 1.00$ dB)
	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off	
	analysis bandwidth ≤ 4000 MHz	
	3 GHz ≤ $f_{\text{center}}$ < 15 GHz	±8° (nom.)
	15 GHz ≤ $f_{\text{center}}$ ≤ 37 GHz	±6° (nom.)
	37 GHz < $f_{\text{center}}$ ≤ 40 GHz	±8° (nom.)
	40 GHz < $f_{\text{center}}$ ≤ max. center frequency <sup>33</sup>	±8° (nom.)
Nonlinearity of displayed level	analysis bandwidth ≤ 6000 MHz	add ±1° (nom.) to the values for analysis bandwidth ≤ 4000 MHz
	analysis bandwidth ≤ 8000 MHz	add ±2° (nom.) to the values for analysis bandwidth ≤ 4000 MHz
Level measurement uncertainty at center frequency	0 dB to -70 dB	< 0.15 dB (nom.) add 0.5 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off" <sup>33</sup>
Third-order intermodulation distortion	reference level = signal level + 6 dB $f_{\text{center}} \leq 8$ GHz: two -20 dBm tones at input mixer within analysis bandwidth <sup>25</sup> , $f_{\text{center}} > 8$ GHz: two -25 dBm tones at input mixer within analysis bandwidth <sup>25</sup> , YIG preselector off	-70 dBc (nom.)
Residual spurious response	RF attenuation = 0 dB, mixer level ≤ -20 dBm <sup>25</sup>	
	analysis bandwidth ≤ 80 MHz	
	$f_{\text{center}} \geq 50$ MHz	-90 dBm (nom.)
	80 MHz < analysis bandwidth ≤ 2000 MHz	
	1100 MHz ≤ $f_{\text{center}}$ < 43 GHz	-80 dBm (nom.)
	43 GHz ≤ $f_{\text{center}}$ ≤ max. center frequency	-75 dBm (nom.)
	2000 MHz < analysis bandwidth ≤ 8312 MHz	
	4.2 GHz ≤ $f_{\text{center}}$ < 36.6 GHz	-65 dBm (nom.)
	36.6 GHz ≤ $f_{\text{center}}$ < 38.2 GHz	-55 dBm (nom.)
	38.2 GHz ≤ $f_{\text{center}}$ ≤ max. center frequency	-60 dBm (nom.)

<sup>33</sup> For R&S®FSW85 the maximum specified frequency is 83 GHz.

ADC related spurious response	single tone at center frequency, mixer level = $-20 \text{ dBm}$ <sup>25, 34</sup> reference level = signal level	
	analysis bandwidth $\leq 1200 \text{ MHz}$	$-65 \text{ dBc}$ (nom.)
	$1200 \text{ MHz} < \text{analysis bandwidth} \leq 2000 \text{ MHz}$	$-60 \text{ dBc}$ (nom.)
	$2000 \text{ MHz} < \text{analysis bandwidth} \leq 8312 \text{ MHz}$	$-50 \text{ dBc}$ (nom.)
Other spurious responses	see section "Spurious responses"	

<sup>34</sup> Mixer level =  $-35 \text{ dBm}$  for bandwidth  $> 2000 \text{ MHz}$  and  $18 \text{ GHz} < \text{center frequency} < 24 \text{ GHz}$ .

## Inputs and outputs

RF input		
Impedance	50 Ω	
Connector	R&S®FSW8, R&S®FSW13	N female
	R&S®FSW26	APC 3.5 mm male (compatible with SMA)
	R&S®FSW43	2.92 mm male (compatible with SMA)
	R&S®FSW50, R&S®FSW67	1.85 mm male (compatible with 2.4 mm)
	R&S®FSW85, RF1 input	1.00 mm male
	R&S®FSW85, RF2 input	1.85 mm male (compatible with 2.4 mm)
VSWR of R&S®FSW8	RF attenuation ≤ 4 dB	
	10 MHz ≤ f ≤ 8 GHz	typ. 1.87 <sup>35</sup>
	5 dB ≤ RF attenuation ≤ 9 dB	
	10 MHz ≤ f < 1 GHz	< 1.5, typ. 1.20 <sup>35</sup>
	10 MHz ≤ f < 3.6 GHz	< 1.5, typ. 1.31 <sup>35</sup>
	3.6 GHz ≤ f ≤ 8 GHz	< 2.0, typ. 1.51 <sup>35</sup>
	RF attenuation ≥ 10 dB	
	10 MHz ≤ f < 1 GHz	< 1.2, typ. 1.09 <sup>35</sup>
	1 GHz ≤ f < 3.6 GHz	< 1.5, typ. 1.19 <sup>35</sup>
	3.6 GHz ≤ f ≤ 8 GHz	< 2.0, typ. 1.42 <sup>35</sup>
VSWR of R&S®FSW13	RF attenuation ≤ 4 dB	
	10 MHz ≤ f ≤ 13.6 GHz	typ. 1.87 <sup>35</sup>
	5 dB ≤ RF attenuation ≤ 9 dB	
	10 MHz ≤ f < 3.6 GHz	< 1.5, typ. 1.25 <sup>35</sup>
	3.6 GHz ≤ f ≤ 13.6 GHz	< 2.0, typ. 1.29 <sup>35</sup>
	RF attenuation ≥ 10 dB	
	10 MHz ≤ f < 1 GHz	< 1.2, typ. 1.10 <sup>35</sup>
	1 GHz ≤ f < 3.6 GHz	< 1.5, typ. 1.14 <sup>35</sup>
	3.6 GHz ≤ f ≤ 13.6 GHz	< 2.0, typ. 1.22 <sup>35</sup>
VSWR of R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, R&S®FSW85	RF attenuation ≤ 4 dB	
	10 MHz ≤ f ≤ 26.5 GHz	typ. 1.87 <sup>35, 36</sup>
	26.5 GHz < f ≤ 40 GHz	typ. 2.0 <sup>35</sup>
	40 GHz < f ≤ 70 GHz	2.0 (nom.)
	70 GHz < f ≤ 85 GHz/90 GHz <sup>27</sup>	2.4 (nom.)
	5 dB ≤ RF attenuation ≤ 9 dB	
	10 MHz ≤ f ≤ 3.5 GHz	< 1.5, typ. 1.24 <sup>35, 36</sup>
	3.5 GHz < f ≤ 8 GHz	< 1.8, typ. 1.26 <sup>35</sup>
	8 GHz < f ≤ 18 GHz	< 1.8, typ. 1.39 <sup>35</sup>
	18 GHz < f ≤ 26.5 GHz	< 2.0, typ. 1.43 <sup>35</sup>
	26.5 GHz < f ≤ 40 GHz	< 2.5, typ. 1.8 <sup>35</sup>
	40 GHz < f ≤ 70 GHz	2.0 (nom.)
	70 GHz < f ≤ 85 GHz/90 GHz <sup>27</sup>	2.4 (nom.)
	RF attenuation ≥ 10 dB	
	10 MHz ≤ f ≤ 3.5 GHz	< 1.2, typ. 1.12 <sup>35, 36</sup>
	3.5 GHz < f ≤ 8 GHz	< 1.5, typ. 1.19 <sup>35</sup>
	8 GHz < f ≤ 18 GHz	< 1.5, typ. 1.25 <sup>35</sup>
	18 GHz < f ≤ 26.5 GHz	< 2.0, typ. 1.37 <sup>35</sup>
	26.5 GHz < f ≤ 40 GHz	< 2.5, typ. 1.7 <sup>35</sup>
	40 GHz < f ≤ 70 GHz	2.0 (nom.)
	70 GHz < f ≤ 85 GHz/90 GHz <sup>27</sup>	2.4 (nom.)
	R&S®FSW85, input coupling AC, RF attenuation ≥ 10 dB	
	50 MHz ≤ f ≤ 3.5 GHz	< 1.5, typ. 1.19 <sup>35</sup>
	R&S®FSW85 RF input 2	
	add 0.2 to the above values (nom.)	
Setting range of attenuator	0 dB to 79 dB, in 1 dB steps <sup>37, 38</sup>	

<sup>35</sup> Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.

<sup>36</sup> R&S®FSW85: specification applies to input coupling DC.

<sup>37</sup> R&S®FSW8 to R&S®FSW67: Mechanical RF attenuator: 5 dB steps. Electronic IF attenuator: 1 dB steps.

<sup>38</sup> R&S®FSW85: Mechanical RF attenuator: 10 dB steps. Electronic IF attenuator: 1 dB steps.

<b>Probe power supply</b>		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)
<b>Noise source control</b>		
Connector		BNC female
Output voltage		0 V/28 V, switchable, max. 100 mA (nom.)
<b>Power sensor/noise source control</b>		
Connector		7-pin LEMOSA female for R&S®FS-SNSxx smart noise sources and R&S®NRP-Zxx power sensors
Noise source control output voltage		0 V/28 V, switchable, max. 100 mA (nom.)
<b>USB interface</b>		
		7 ports, type A plug, version 2.0
		1 port, type B plug, version 2.0
<b>AF output</b>		
Connector		3.5 mm mini-jack
Output impedance		10 Ω (nom.)
Open-circuit voltage		up to 1.5 V, adjustable
<b>External trigger/gate</b>		
Number of ports		1 × input, 2 × input/output, selectable
Connector		BNC female
Trigger input voltage		0.5 V to 3.5 V (nom.)
Trigger output voltage		TTL-compatible, 0 V/5 V (nom.)
Impedance		10 kΩ (nom.)
<b>Reference input 1 MHz to 50 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		1 MHz ≤ f <sub>in</sub> ≤ 50 MHz, in 1 Hz steps
Required level		> 0 dBm
<b>Reference input 100 MHz/1 GHz</b>		
Connector		SMA female
Impedance		50 Ω (nom.)
Input frequency range		100 MHz, 1 GHz
Required level		0 dBm to 10 dBm
<b>Reference output 10 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency		10 MHz
Level		10 dBm (nom.)
<b>Reference output 1 MHz to 50 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency	internal reference external reference	not active same as reference input signal
Level		same as reference input signal
<b>Reference output 100 MHz</b>		
Connector		SMA female
Impedance		50 Ω (nom.)
Output frequency		100 MHz
Level		6 dBm (nom.)

<b>Reference output 640 MHz</b>		
Connector		SMA female
Impedance		50 Ω (nom.)
Output frequency		640 MHz
Level		16 dBm (nom.)

<b>IF/video output</b>		
Connector		BNC female, 50 Ω (nom.)
<b>IF out</b>		
Bandwidth		equal to RBW setting (RBW/2) to (240 MHz – RBW/2)
IF frequency		
Output level	center frequency > 10 MHz, span = 0 Hz or I/Q analyzer on, signal at reference level and center frequency	0 dBm (nom.)
<b>Video out</b>		
Bandwidth		equal to VBW setting
Output scaling	log. display scale lin. display scale	logarithmic linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V at 50 Ω load (nom.)

<b>IF wide output (with R&amp;S®FSW-B160/B320/-B512/-B512R option only)</b>		
Connector	R&S®FSW-B160 or R&S®FSW-B320	BNC female, 50 Ω (nom.)
	R&S®FSW-B512	SMA female, 50 Ω (nom.)
IF frequency	center frequency ≥ 200 MHz	50 MHz to 550 MHz (nom.)
Maximum bandwidth (6 dB)	YIG preselector off	500 MHz
Output level	RF attenuation = auto, reference level ≥ –15 dBm, signal level = reference level	–20 dBm (nom.)
<b>Aux port</b>		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V (nom.), max. 15 mA (nom.)
Input		TTL-compatible, max. 5 V (nom.)

<b>IF output 2 GHz (R&amp;S®FSW26, R&amp;S®FSW43, R&amp;S®FSW50, R&amp;S®FSW67 and R&amp;S®FSW85 only)</b>		
Connector		SMA female, 50 Ω (nom.)
RF frequency range	span = 0 Hz	8 GHz to the maximum frequency of the instrument model
IF frequency	center	2 GHz

<b>IEC/IEEE bus control</b>		
Command set		SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		
Connector		10/100/1000BASE-T RJ-45

<b>External monitor</b>		
Connector		DVI-D, DisplayPort Rev 1.1

<b>Synchronization input</b>		
Connector		HDMI™

<b>Synchronization output</b>		
Connector		HDMI™

## General data

<b>Display</b>	30.7 cm (12.1") WXGA color touchscreen	
<b>Resolution</b>	1280 × 800 pixel (WXGA resolution)	
<b>Pixel failure rate</b>	< 1 × 10 <sup>-5</sup>	

<b>Data storage</b>		
Internal	standard	solid state disk ≥ 128 Gbyte
External		supports USB 2.0 compatible memory devices

<b>Temperature</b>		
Temperature	operating temperature range	+5 °C to +50 °C <sup>39</sup>
	permissible temperature range	0 °C to +55 °C <sup>39</sup>
	storage temperature range	-40 °C to +70 °C
Climatic loading	+40 °C at 90 % rel. humidity, in line with EN 60068-2-30, without condensation	

<b>Altitude</b>		
Maximum operating altitude	above sea level	4600 m (approx. 15100 feet)

<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz, displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz, acceleration: 0.5 g constant, in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration: 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E method no. 516.4, procedure I, MIL-PRF-28800F, class 3

<b>EMC</b>		<ul style="list-style-type: none"> <li>• IEC/EN 61326-1 <sup>40, 41</sup></li> <li>• IEC/EN 61326-2-1</li> <li>• CISPR 11/EN 55011 <sup>40</sup></li> <li>• IEC/EN 61000-3-2</li> <li>• IEC/EN 61000-3-3</li> </ul>
------------	--	---

<b>Recommended calibration interval</b>		1 year
---	--	--------

<b>Warranty</b>	base unit	3 years
	accessories	1 year

<sup>39</sup> With built-in R&S®FSW-B512R option, the upper operating and permissible temperature with active real-time analysis is limited to +45 °C.

With built-in R&S®FSW-B800R option, the upper operating and permissible temperature with active real-time analysis is limited to +40 °C.

<sup>40</sup> Emission limits for class A equipment apply.

<sup>41</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

<b>Power supply</b>		
AC input voltage range		100 V to 240 V
AC supply frequency		50 Hz to 60 Hz/400 Hz
Maximum input current		7.3 A (100 V) to 4.6 A (240 V)
Power consumption	R&S®FSW8	150 W without options, 250 W with all options (meas.) <sup>42</sup>
	R&S®FSW13, R&S®FSW26	175 W without options, 275 W with all options (meas.) <sup>42</sup>
	R&S®FSW43, R&S®FSW50	200 W without options, 300 W with all options (meas.) <sup>42</sup>
	R&S®FSW67	220 W without options, 320 W with all options (meas.) <sup>42</sup>
	R&S®FSW85	230 W without options, 330 W with all options (meas.) <sup>42</sup>
Safety		in line with IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1
Test marks		VDE, CE, cCSA <sub>us</sub> , KCC

<b>Dimensions and weight</b>		
Dimensions (nom.) (W × H × D, including front handles and rear feet)	R&S®FSW8 to R&S®FSW67	462 mm × 240 mm × 504 mm (18.15 in × 9.44 in × 19.81 in)
	R&S®FSW85	462 mm × 240 mm × 610 mm (18.15 in × 9.44 in × 24.01 in)
Net weight without options (nom.)	R&S®FSW8	18.6 kg (41.01 lb)
	R&S®FSW13	20.2 kg (44.53 lb)
	R&S®FSW26	20.2 kg (44.53 lb)
	R&S®FSW43, R&S®FSW50	20.9 kg (46.07 lb)
	R&S®FSW67	23.6 kg (52.03 lb)
	R&S®FSW85	26.6 kg (58.64 lb)

<sup>42</sup> All options except R&S®FSW-B512R/-B1200/-B2001/-B800R.

For R&S®FSW-B512R add 130 W to the power consumption.

For R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 add 200 W to the power consumption.

## Options

### R&S®FSW-B10 external generator control

<b>Interface</b>	
IEC/IEEE bus control	24-pin Amphenol female
Aux control	9-pin D-Sub female

<b>Supported signal generators</b>	R&S®SGS100A, R&S®SGT100A, R&S®SMA100A, R&S®SMA100B, R&S®SMB100A, R&S®SMB100B, R&S®SMBV100A, R&S®SMBV100B, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMW200A, R&S®SMX, R&S®SMY
------------------------------------	---

### R&S®FSW-B13 highpass filters

<b>Frequency</b>	
Frequency range	filter 1
	1 GHz to 1.75 GHz
	filter 2
	1.75 GHz to 3 GHz

<b>Stopband attenuation</b>	
500 MHz to 875 MHz	filter 1
875 MHz to 1.5 GHz	filter 2
	> 20 dB (nom.)
	> 20 dB (nom.)

<b>Other specifications</b>	
Level measurement uncertainty	see base unit specification
Displayed average noise level	
Intermodulation	
Measurement uncertainty	

### R&S®FSW-B17 digital baseband interface

<b>I/Q data IN</b>	
Interface	LVDS
	connector
Transfer protocol	R&S®Digital I/Q Interface <sup>43</sup>
User data	sample rate
	resolution
	general purpose signals

<b>I/Q data OUT</b>	
Interface	LVDS
	connector
Transfer protocol	R&S®Digital I/Q Interface <sup>43</sup>
User data	sample rate
	resolution
Maximum I/Q bandwidth	standard
	with R&S®FSW-B40 option
	with R&S®FSW-B80 option
	with R&S®FSW-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R option
	40 MHz
	80 MHz
	160 MHz

<sup>43</sup> R&S®Digital I/Q Interface is a Rohde & Schwarz company standard for the transmission of digital I/Q data.  
It is supported by a wide range of instruments (signal generators, signal analyzers and communications testers).

## R&S®FSW-B517 DIG IQ 40G streaming out interface (not available with R&S®FSW-B4001/-B6001/-B8001 option)

Interface	direction	I/Q data OUT
	connector	QSFP+
	transfer data rate	40 Gbps
Output channel		16 bit, 600 Msample/s
User data	sample rate	100.1 Msample/s to 600 Msample/s (nom.)
	resolution	16 bit for I and 16 bit for Q
Minimum I/Q bandwidth		80 MHz
Maximum I/Q bandwidth	with R&S®FSW-B512/-B512R/-B1200/-B2001/-B800R option	512 MHz

## R&S®FSW-B1017 DIG IQ 40G streaming out interface (max. 1 GHz bandwidth) (available with R&S®FSW-B1200/-B2001/-B800R option)

Interface	direction	I/Q data OUT
	connector	QSFP+
	transfer data rate	40 Gbps
Output channel	I/Q bandwidth 80 MHz to 512 MHz	see R&S®FSW-B517
	I/Q bandwidth 1000 MHz	12 bit, 1200 Msample/s
User data	sample rate	see R&S®FSW-B517; 1200 Msample/s additionally (nom.)
	resolution	
	I/Q bandwidth 80 MHz to 512 MHz	see R&S®FSW-B517
	I/Q bandwidth 1000 MHz	12 bit for I and 12 bit for Q
I/Q bandwidth		see R&S®FSW-B517; 1000 MHz additionally

## R&S®FSW-B21 LO/IF connections for external mixers (not available for R&S®FSW8, R&S®FSW13)

LO signal		
Frequency range		7.65 GHz to 17.45 GHz
Output level		+13 dBm to 17 dBm (nom.)
Accuracy of set LO level	+20 °C to +30 °C	±1.5 dB
	+5 °C to +40 °C	±3 dB

IF input		
IF frequency	set signal analysis bandwidth	
	≤ 80 MHz, bandwidth-dependent	1310 MHz to 1330 MHz
	80 MHz to 160 MHz/320 MHz with R&S®FSW-B160/-B320	1530 MHz
	80 MHz to 512 MHz with R&S®FSW-B512/-B512R/-B1200/-B2001/-B800R	1580 MHz
	> 512 MHz with R&S®FSW-B1200/-B2001/-B800R	3290 MHz
	> 80 MHz with R&S®FSW-B4001	2660 MHz
	> 80 MHz with R&S®FSW-B6001/-B8001	
	analysis bandwidth ≤ 4.4 GHz	2660 MHz
	analysis bandwidth > 4.4 GHz	9933 MHz
	> 80 MHz with R&S®FSW-B2000	2000 MHz
	> 80 MHz with R&S®FSW-B5000	
	analysis bandwidth ≤ 4.4 GHz	2800 MHz
	analysis bandwidth > 4.4 GHz	3500 MHz
Full-scale level	compression < 1 dB	
	2-port mixer (LO output/IF input, front panel) <sup>44</sup>	-20 dBm (nom.)
	3-port mixer (IF input, front panel)	-20 dBm (nom.)

<sup>44</sup> 2-port mixers are not supported by the R&S®FSW-B800R/-B1200/-B2001/-B4001/-B6001/-B8001/-B2000/-B5000 options.

Level uncertainty at IF frequency	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 2-port mixer, LO output/IF input connector (front panel) <sup>44</sup>	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 3-port mixer, IF input connector (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

<b>Inputs and outputs</b>		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

## R&S®FSW-B24 RF preamplifier

<b>Frequency</b>		
Frequency range	R&S®FSW8	100 kHz to 8 GHz
	R&S®FSW13	100 kHz to 13.6 GHz
	R&S®FSW26	100 kHz to 26.5 GHz
	R&S®FSW43	100 kHz to 43.5 GHz
	R&S®FSW50	100 kHz to 50 GHz
	R&S®FSW67	100 kHz to 67 GHz

<b>Setting range</b>		
RF preamplifier gain		15 dB/30 dB (nom.) (selectable) <sup>45</sup>

<b>Other specifications</b>		
Level measurement uncertainty		see base unit specification
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

## R&S®FSW-B25 electronic attenuator

<b>Frequency</b>		
Frequency range	R&S®FSW8	10 MHz to 8 GHz
	R&S®FSW13, R&S®FSW26	10 MHz to 13.6 GHz

<b>Setting range</b>	0 dB to 30 dB, in 1 dB steps <sup>46</sup>
----------------------	--

<b>Level measurement uncertainty</b>	see base unit specification
--------------------------------------	-----------------------------

<b>Displayed average noise level</b>	electronic attenuator on	specification of base unit degrades by 3 dB + 0.25 dB × f / 1 GHz (nom.)
--------------------------------------	--------------------------	--

<b>Intermodulation</b>		
Third-order intercept point (TOI)	electronic attenuator off or electronic attenuator on and RF attenuation = 0 dB	see base unit specification
	electronic attenuator on, RF attenuation = 30 dB	
	10 MHz to 500 MHz	30 dBm (nom.)
	500 MHz to 13.6 GHz	40 dBm (nom.)

<sup>45</sup> 15 dB gain is only available for R&S®FSW8, R&S®FSW13, R&S®FSW26 and instruments starting from the following serial numbers:  
R&S®FSW43: 102163, R&S®FSW50: 101663, R&S®FSW67: 101715.

<sup>46</sup> Electronic RF attenuator: 5 dB steps.  
Electronic IF attenuator: 1 dB steps.

## R&S®FSW-B71 analog baseband inputs, R&S®FSW-B71E 80 MHz analysis bandwidth for analog baseband inputs

<b>Frequency</b>		
Frequency range (equalized)	R&S®FSW-B71	
	I only, Q only	DC to 40 MHz
	I + jQ	-40 MHz to +40 MHz
R&S®FSW-B71E		
	I only, Q only	DC to 80 MHz
	I + jQ	-80 MHz to +80 MHz

<b>Spectral purity</b>		
Phase noise	offset 1 kHz	-134 dBc (1 Hz) (nom.)
	offset 10 kHz	-138 dBc (1 Hz) (nom.)
	offset $\geq$ 100 kHz	-144 dBc (1 Hz) (nom.)

<b>Inputs</b>		
Connectors	I and Q	BNC female, $50 \Omega$ (nom.)
	T and $\bar{Q}$ <sup>47</sup>	BNC female, $50 \Omega$ (nom.)
Maximum safe input voltage	any input, sum of DC + AC	$\pm 4$ V
Input voltage range (full scale)	peak voltage	$\pm 2$ V, $\pm 1$ V, $\pm 0.5$ V, $\pm 0.25$ V
Maximum common mode input range		-3 V to +3 V
Input impedance	single-ended	$50 \Omega$ (nom.)
	differential	$100 \Omega$ (nom.)
	common mode at DC	$20 k\Omega$ (nom.)
Input return loss	0 Hz to 40 MHz	-35 dB (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	-30 dB (nom.)

<b>Amplitude</b>		
Absolute amplitude accuracy	$f_{\text{input}} = 1$ MHz, input voltage = full scale - 6 dB	$\pm 0.15$ dB
Amplitude linearity	0 dB to -80 dB relative to full scale	$\pm 0.1$ dB (nom.)
Frequency response		
Amplitude	relative to 1 MHz	
	0 Hz to 40 MHz	$\pm 0.15$ dB
	40 MHz to 80 MHz (R&S®FSW-B71E only)	$\pm 0.25$ dB
Deviation from linear phase	0 Hz to 40 MHz	$\pm 1^\circ$ (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	$\pm 2^\circ$ (nom.)
Channel match (I/Q imbalance)		
Amplitude match accuracy	0 Hz to 20 MHz	$\pm 0.06$ dB ( $2\sigma$ )
	20 MHz to 40 MHz	$\pm 0.1$ dB ( $2\sigma$ )
	40 MHz to 80 MHz (R&S®FSW-B71E only)	$\pm 0.15$ dB ( $2\sigma$ )
Phase match accuracy	0 Hz to 20 MHz	$\pm 0.3^\circ$ (nom.)
	20 MHz to 40 MHz	$\pm 0.6^\circ$ (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	$\pm 1^\circ$ (nom.)

<sup>47</sup> Not available for the R&S®FSW85.

<b>Dynamic range</b>		
Crosstalk		-80 dB (nom.)
Signal-to-noise ratio	any input range, relative to full scale	145 dBc (1 Hz) (nom.)
Displayed average noise level (RMS)	2 MHz to 80 MHz range	
	±2 V peak	-130 dBm (1 Hz) (72 nV ( $\sqrt{1 \text{ Hz}}$ ) (nom.)
	±1 V peak	-136 dBm (1 Hz) (36 nV ( $\sqrt{1 \text{ Hz}}$ ) (nom.)
	±0.5 V peak	-142 dBm (1 Hz) (18 nV ( $\sqrt{1 \text{ Hz}}$ ) (nom.)
	±0.25 V peak	-148 dBm (1 Hz) (9 nV ( $\sqrt{1 \text{ Hz}}$ ) (nom.)
Residual DC (I/Q offset)	relative to full scale	-54 dB (nom.)
Residual response	range ± 0.25 V peak	-90 dBm (nom.)
Spurious response	with full scale input signal	
	0 Hz to 40 MHz	-75 dBc (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	-70 dBc (nom.)
Third-order intermodulation distortion	two CW signals, voltage = full scale – 6 dB (each signal)	
	0 Hz to 40 MHz	-80 dBc (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	
	differential	-80 dBc (nom.)
	single-ended	-74 dBc (nom.)

<b>Probes</b>		
Probes supported on connectors I and Q	active single-ended probes	R&S®RT-ZS10E R&S®RT-ZS10 R&S®RT-ZS20 R&S®RT-ZS30 R&S®RT-ZS60
	active differential probes	R&S®RT-ZD20 R&S®RT-ZD30 R&S®RT-ZD40
<b>RF measurements using probes<sup>48</sup></b>		
Supported connector	input source RF set to baseband input I	I
Maximum input frequency		5 GHz <sup>49</sup>
Frequency response	see probe specification for frequency response of probe	add the probe frequency response to the R&S®FSW frequency response specified in section “Total measurement uncertainty”

<sup>48</sup> Feature not available for R&S®FSW67 and R&S®FSW85.

<sup>49</sup> Maximum frequency supported by the connector. To identify the maximum achievable input frequency when using a probe, the probe specification must be taken into account.

## R&S®FSW-B2000 2 GHz analysis bandwidth (option available for all models except R&S®FSW8, R&S®FSW13) <sup>50</sup>

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B2000 option. "B2000" must be configured as data source in the INPUT menu. When using other input settings for I/Q data recording, i.e. in relation with the R&S®FSW-B40/-B80/-B160/-B320/-B512/-B512R options, see section "I/Q data" in the base unit specification. The R&S®FSW-B2000 option uses an oscilloscope as external digitizer. An R&S®RTO1044, R&S®RTO1014 with R&S®RTO-B204 option, R&S®RTO2044 or R&S®RTO2064 with R&S®RTO-B4 option is required to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 option" and "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option".

Frequency range	setting range of center frequency	
	standard, dependent on instrument model	5.5 GHz to 26/43/50/67/86 GHz
	R&S®FSW85 with R&S®FSW-B90G option	5.5 GHz to 90 GHz
Record length <sup>51</sup>	2 GHz analysis bandwidth, sampling rate 2.5 GHz, R&S®RTO-1044 with R&S®RTO-B104 option	
		max. 200 Msample I and Q <sup>52</sup>
	2 GHz analysis bandwidth, sampling rate 2.5 GHz, R&S®RTO-2044/2064 with R&S®RTO-B110 option	
		max. 500 Msample I and Q <sup>52</sup>
Sampling rate	setting range	10 kHz to 10 GHz
	default for 2 GHz analysis bandwidth	2.5 GHz
Signal analysis bandwidth (equalized)	dependent on sampling rate, YIG preselector off	8 kHz to 2 GHz
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>53</sup> , +20 °C to +30 °C	
	analysis bandwidth ≤ 2 GHz	
	5.5 GHz ≤ f <sub>center</sub> < 8 GHz	±1.5 dB
	8 GHz ≤ f <sub>center</sub> < 22 GHz	±1.2 dB
	22 GHz ≤ f <sub>center</sub> ≤ 26.5 GHz	±1.4 dB
	26.5 GHz < f <sub>center</sub> ≤ 43.5 GHz	±1.6 dB
	43.5 GHz < f <sub>center</sub> ≤ 50.0 GHz	±1.7 dB
	50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz <sup>54</sup>	±2.0 dB
	67 GHz < f <sub>center</sub> ≤ 85 GHz	±2.5 dB
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>53</sup> , +20 °C to +30 °C	
	analysis bandwidth ≤ 500 MHz	
	5.5 GHz ≤ f <sub>center</sub> < 13 GHz	±4° (nom.)
	13 GHz ≤ f <sub>center</sub> ≤ 37 GHz	±2° (nom.)
	37 GHz < f <sub>center</sub> ≤ 40 GHz	±4° (nom.)
	40.0 GHz < f <sub>center</sub> ≤ 50.0 GHz	±6° (nom.)
	50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz	±4° (nom.)
	67 GHz < f <sub>center</sub> ≤ 85 GHz	±6° (nom.)
	analysis bandwidth ≤ 1 GHz	
	5.5 GHz ≤ f <sub>center</sub> < 13 GHz	±6° (nom.)
	13 GHz ≤ f <sub>center</sub> ≤ 37 GHz	±4° (nom.)
	37 GHz < f <sub>center</sub> ≤ 40 GHz	±6° (nom.)
	40.0 GHz < f <sub>center</sub> ≤ 50.0 GHz	±8° (nom.)
	50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz	±6° (nom.)
	67 GHz < f <sub>center</sub> ≤ 85 GHz	±8° (nom.)

<sup>50</sup> The R&S®FSW-B2000 option is not available in combination with the R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001/-B5000 option.

<sup>51</sup> The maximum record length with the R&S®FSW-B2000 option depends on the R&S®RTO memory configuration.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample) × R&S®FSW sample rate/R&S®RTO sample rate.

This equation is valid for oscilloscopes equipped with R&S®RTO-B104 or R&S®RTO-B110 option. For other memory option configurations divide the values by two when using external trigger or power splitter mode on. The sample rate for the R&S®RTO can be set to 10 GHz (default) or 20 GHz.

At 2 GHz analysis bandwidth the R&S®FSW default sample rate is 2.5 GHz.

<sup>52</sup> Rounded to Msample.

<sup>53</sup> For power splitter mode on add ±0.3 dB to the amplitude flatness specification and ±2° to the deviation from linear phase values.

<sup>54</sup> f<sub>center</sub> ≤ 66.5 GHz for 2 GHz analysis bandwidth with R&S®FSW67.

Deviation from linear phase (continued)	analysis bandwidth $\leq$ 2 GHz	
	R&S®FSW26	
	$f_{center} \geq 8 \text{ GHz}$	$\pm 8^\circ$ (nom.)
	R&S®FSW43 to R&S®FSW85	
	$5.5 \text{ GHz} \leq f_{center} < 13 \text{ GHz}$	$\pm 8^\circ$ (nom.)
	$13 \text{ GHz} \leq f_{center} \leq 37 \text{ GHz}$	$\pm 6^\circ$ (nom.)
	$37 \text{ GHz} < f_{center} \leq 40 \text{ GHz}$	$\pm 8^\circ$ (nom.)
	$40.0 \text{ GHz} < f_{center} \leq 50.0 \text{ GHz}$	$\pm 10^\circ$ (nom.)
Level measurement uncertainty at center frequency	$50.0 \text{ GHz} < f_{center} \leq 67.0 \text{ GHz}$ <sup>54</sup>	$\pm 8^\circ$ (nom.)
	$67 \text{ GHz} < f_{center} \leq 85 \text{ GHz}$	$\pm 10^\circ$ (nom.)
add 1 dB (nom.) to the values in “Total measurement uncertainty – YIG preselector off”		

## R&S®FSW-B5000 5 GHz analysis bandwidth for R&S®FSW43 and R&S®FSW85<sup>55</sup>

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B5000 option. "B5000" must be configured as data source in the INPUT menu. When using other input settings for I/Q data recording, i.e. in relation with the R&S®FSW-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001 options, see section "I/Q data" in the base unit specification. The R&S®FSW-B5000 option uses an oscilloscope as external digitizer. An R&S®RTO 2064 with R&S®RTO-B4 option is required to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option".

Frequency range	setting range of center frequency	
R&S®FSW43		
RF preamplifier off	9.5 GHz to 43 GHz	
RF preamplifier on	9.5 GHz to 41 GHz	
R&S®FSW85		
without R&S®FSW-B90G option	9.5 GHz to 85 GHz	
with R&S®FSW-B90G option	9.5 GHz to 90 GHz	
Record length <sup>56</sup>	R&S®RTO 2064 with R&S®RTO-B110 option	
2 GHz analysis bandwidth, 2.5 GHz sampling rate	max. 250 Msample I and Q <sup>52</sup>	
5 GHz analysis bandwidth, 6.25 GHz sampling rate	max. 625 Msample I and Q <sup>52</sup>	
Sampling rate	setting range	10 kHz to 20 GHz
	default for 2 GHz analysis bandwidth	2.5 GHz
	default for 5 GHz analysis bandwidth	6.25 GHz
Signal analysis bandwidth (equalized)	dependent on sampling rate, YIG preselector off	8 kHz to 5 GHz
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>57</sup> , +20 °C to +30 °C	
analysis bandwidth ≤ 5 GHz		
9.5 GHz ≤ f <sub>center</sub> < 22 GHz	±1.2 dB	
22 GHz ≤ f <sub>center</sub> ≤ 26.5 GHz	±1.4 dB	
26.5 GHz < f <sub>center</sub> ≤ 43.5 GHz	±1.6 dB	
43.5 GHz < f <sub>center</sub> ≤ 50.0 GHz	±1.7 dB	
50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz	±2.0 dB	
67 GHz < f <sub>center</sub> ≤ 85 GHz/87.5 GHz <sup>58</sup>	±2.5 dB	
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>57</sup> , +20 °C to +30 °C	
analysis bandwidth ≤ 500 MHz		
9.5 GHz ≤ f <sub>center</sub> < 13 GHz	±4° (nom.)	
13 GHz ≤ f <sub>center</sub> ≤ 37 GHz	±2° (nom.)	
37 GHz < f <sub>center</sub> ≤ 40 GHz	±4° (nom.)	
40.0 GHz < f <sub>center</sub> ≤ 50.0 GHz	±6° (nom.)	
50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz	±4° (nom.)	
67 GHz < f <sub>center</sub> ≤ 83.0 GHz	±6° (nom.)	
analysis bandwidth ≤ 1 GHz		
9.5 GHz ≤ f <sub>center</sub> < 13 GHz	±6° (nom.)	
13 GHz ≤ f <sub>center</sub> ≤ 37 GHz	±4° (nom.)	
37 GHz < f <sub>center</sub> ≤ 40 GHz	±6° (nom.)	
40.0 GHz < f <sub>center</sub> ≤ 50.0 GHz	±8° (nom.)	
50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz	±6° (nom.)	
67 GHz < f <sub>center</sub> ≤ 83.0 GHz	±8° (nom.)	

<sup>55</sup> The R&S®FSW-B5000 option is not available in combination with the R&S®FSW-B2000/-B4001/-B6001/-B8001 option.

<sup>56</sup> The maximum record length with the R&S®FSW-B5000 option depends on the R&S®RTO memory configuration.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample) × R&S®FSW sample rate/R&S®RTO sample rate.

This equation is valid for oscilloscopes equipped with R&S®RTO-B104 or R&S®RTO-B110 option. For other memory option configurations divide the values by two when using external trigger or power splitter mode on.

The sample rate for the R&S®RTO is 20 GHz. At 5 GHz analysis bandwidth the R&S®FSW default sample rate is 6.25 GHz.

<sup>57</sup> For power splitter mode on add ±0.3 dB to the amplitude flatness specification and ±5° to the deviation from linear phase values.

<sup>58</sup> f<sub>center</sub> > 85 GHz requires R&S®FSW-B90G option.

Deviation from linear phase (continued)	analysis bandwidth $\leq$ 2 GHz	
	9.5 GHz $\leq f_{center} < 13$ GHz	$\pm 8^\circ$ (nom.)
	13 GHz $\leq f_{center} \leq 37$ GHz	$\pm 6^\circ$ (nom.)
	37 GHz $< f_{center} \leq 40$ GHz	$\pm 8^\circ$ (nom.)
	40.0 GHz $< f_{center} \leq 50.0$ GHz	$\pm 10^\circ$ (nom.)
	50.0 GHz $< f_{center} \leq 67.0$ GHz	$\pm 8^\circ$ (nom.)
	67 GHz $< f_{center} \leq 83.0$ GHz	$\pm 10^\circ$ (nom.)
	analysis bandwidth $\leq$ 4.4 GHz	
	9.5 GHz $\leq f_{center} < 13$ GHz	$\pm 10^\circ$ (nom.)
	13 GHz $\leq f_{center} \leq 37$ GHz	$\pm 8^\circ$ (nom.)
	37 GHz $< f_{center} \leq 40$ GHz	$\pm 10^\circ$ (nom.)
	40.0 GHz $< f_{center} \leq 50.0$ GHz	$\pm 12^\circ$ (nom.)
	50.0 GHz $< f_{center} \leq 67.0$ GHz	$\pm 10^\circ$ (nom.)
	67 GHz $< f_{center} \leq 82.0$ GHz <sup>59</sup>	$\pm 12^\circ$ (nom.)
	analysis bandwidth $\leq$ 5 GHz	
	9.5 GHz $\leq f_{center} \leq 80.0$ GHz <sup>59</sup>	add $\pm 3^\circ$ (nom.) to the values for analysis bandwidth $\leq$ 4.4 GHz
Level measurement uncertainty at center frequency	add 1 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"	

## R&S®FSW-B2071 oscilloscope baseband inputs (available for all R&S®FSW models)

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B2071 option. An R&S®RTO1044, R&S®RTO2044 or R&S®RTO 2064 with R&S®RTO-B4 option is required to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 option" and "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option".

Frequency range	dependent on R&S®RTO model	
R&S®RTO 1044/2044	I + jQ	-4 GHz to +4 GHz
	I only	DC to 4 GHz
R&S®RTO 2064	I + jQ	-6 GHz to +6 GHz
	I only	DC to 6 GHz
Record length <sup>60</sup>	sampling rate 2.5 GHz, R&S®RTO 1044 with R&S®RTO-B104 option	
	I + jQ, differential	max. 100 Msample <sup>61</sup>
	I + jQ, single ended	max. 200 Msample <sup>61</sup>
	I only	max. 200 Msample <sup>61</sup>
	sampling rate 2.5 GHz, R&S®RTO 2044/2064 with R&S®RTO-B110 option	
	I + jQ, differential	max. 250 Msample <sup>61</sup>
	I + jQ, single ended	max. 500 Msample <sup>61</sup>
	I only	max. 500 Msample <sup>61</sup>
Sampling rate	setting range	10 kHz to 20 GHz
	default for 2 GHz analysis bandwidth	2.5 GHz
Signal analysis bandwidth	dependent on R&S®RTO model and I/Q mode	
	R&S®RTO 1044/2044, R&S®RTO6 with R&S®RTO6-B94 option	8 kHz to 8 GHz
	R&S®RTO 2064, R&S®RTO6 with R&S®RTO6-B96 option	8 kHz to 12 GHz
Amplitude	see datasheet R&S®RTO	
Dynamic range	see datasheet R&S®RTO	

<sup>59</sup> Phase alignment is performed up to  $f = 83$  GHz.

<sup>60</sup> The maximum record length with the R&S®FSW-B2071 option depends on the R&S®RTO memory configuration and the number of active R&S®RTO channels.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate for 1 active channel:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample)  $\times$  R&S®FSW sample rate/R&S®RTO sample rate.

Divide the values by two with R&S®RTO-B104 or R&S®RTO-B110 for differential mode. For other memory option configurations divide the value by two when using differential mode or I/Q single ended mode.

The sample rate for the R&S®RTO will be set to 10 GHz in differential mode and 20 GHz for all other modes.

At 2 GHz analysis bandwidth the R&S®FSW default sample rate is 2.5 GHz.

<sup>61</sup> Rounded to Msample.

## R&S®FSW-K980 health and utilization monitoring service (HUMS)

Health and utilization monitoring service (HUMS) <sup>62, 63</sup>		
Interfaces	protocols and interfaces supported for data readout and display	<ul style="list-style-type: none"> <li>• SNMP (v1, v2c, v3)</li> <li>• REST (JSON)</li> <li>• SCPI</li> <li>• device web</li> </ul>
Services	information provided	<ul style="list-style-type: none"> <li>• device information (model, serial number, BIOS, date, time, system, HUMS and software information)</li> <li>• user-defined information tags (e.g. for asset management)</li> <li>• equipment information (hardware, options, software, licenses)</li> <li>• system operating status</li> <li>• instrument security information</li> <li>• service related information (due dates etc.)</li> <li>• mass storage related information</li> <li>• instrument utilization data</li> <li>• device history (event log)</li> </ul>

<sup>62</sup> For details, see application note: [www.rohde-schwarz.com/appnote/GFM336](http://www.rohde-schwarz.com/appnote/GFM336)

<sup>63</sup> For use with common available asset management tools.

## Ordering information

Designation	Type	Order No.
Signal and spectrum analyzer, 2 Hz to 8 GHz	R&S®FSW8	1331.5003.08
Signal and spectrum analyzer, 2 Hz to 13.6 GHz	R&S®FSW13	1331.5003.13
Signal and spectrum analyzer, 2 Hz to 26.5 GHz	R&S®FSW26	1331.5003.26
Signal and spectrum analyzer, 2 Hz to 43.5 GHz	R&S®FSW43	1331.5003.43
Signal and spectrum analyzer, 2 Hz to 50 GHz	R&S®FSW50	1331.5003.50
Signal and spectrum analyzer, 2 Hz to 67 GHz	R&S®FSW67	1331.5003.67
Signal and spectrum analyzer, 2 Hz to 85 GHz <sup>64</sup>	R&S®FSW85	1331.5003.85
<b>Accessories supplied</b>		
Power cable, quick start guide		
R&S®FSW26:	adapter 3.5 mm (APC3.5-compatible) female/female	
R&S®FSW43:	adapter 2.92 mm female/female	
R&S®FSW50 and R&S®FSW67:	adapter 1.85 mm female/female	
R&S®FSW85:	adapter 1.0 mm female/female, torque wrench for 1.0 mm connectors with 0.23 Nm coupling torque, adapter 1.85 mm female/female	

## Options for R&S®FSW with order no. 1331.5003.xx

Designation	Type	Order No.	Retro-fittable	Remarks
OCXO precision frequency reference	R&S®FSW-B4	1313.0703.02	yes	user-retrofittable
Resolution bandwidth up to 40 MHz	R&S®FSW-B8E	1338.6911.02	yes	for R&S®FSW8/13/26/43/50/67/85; the signal analysis bandwidth is defined by the R&S®FSW-B40/-B80/-B160/ -B320/-B512/-B512R/-B1200/-B2001/ -B800R/-B4001/-B6001/-B8001/-B2000/ -B5000 options, not by the R&S®FSW-B8E option; user-retrofittable <sup>65</sup>
Resolution bandwidth up to 80 MHz	R&S®FSW-B8	1313.2464.26	yes	for R&S®FSW8/13/26; the signal analysis bandwidth is defined by the R&S®FSW-B40/-B80/-B160/ -B320/-B512/-B512R/-B1200/-B2001/ -B800R/-B4001/-B6001/-B8001/-B2000/ -B5000 options, not by the R&S®FSW-B8 option; contact service center
Resolution bandwidth up to 80 MHz	R&S®FSW-B8	1313.2464.02	yes	for R&S®FSW43/50/67/85; the signal analysis bandwidth is defined by the R&S®FSW-B40/-B80/-B160/ -B320/-B512/-B512R/-B1200/-B2001/ -B800R/-B4001/-B6001/-B8001/-B2000/ -B5000 options, not by the R&S®FSW-B8 option; contact service center; export license required
External generator control	R&S®FSW-B10	1313.1622.02	yes	contact service center
Highpass filter for harmonic measurements	R&S®FSW-B13	1313.0761.02	yes	user-retrofittable
Digital baseband Interface	R&S®FSW-B17	1313.0784.02	yes	user-retrofittable
Spare solid state drive (removable hard drive)	R&S®FSW-B18	1313.0790.10	yes	user-retrofittable
LO/IF connections for external mixers	R&S®FSW-B21	1313.1100.28	yes	for R&S®FSW26/43/50/67; contact service center
LO/IF connections for external mixers	R&S®FSW-B21	1313.1100.86	yes	for R&S®FSW85; contact service center

<sup>64</sup> Frequency range for R&S®FSW85 with R&S®FSW-B90G option: 2 Hz to 90 GHz (YIG preselector off).

<sup>65</sup> For instruments starting from the following serial numbers: R&S®FSW8: 101342, R&S®FSW13: 101344, R&S®FSW26: 101664, R&S®FSW43: 101450, R&S®FSW50: 101322, R&S®FSW67: 101409, R&S®FSW85: 101573.

Designation	Type	Order No.	Retro-fittable	Remarks
RF preamplifier, 100 kHz to 13.6 GHz	R&S®FSW-B24	1313.0832.13	yes	for R&S®FSW8/13; contact service center
RF preamplifier, 100 kHz to 26.5 GHz	R&S®FSW-B24	1313.0832.26	yes	for R&S®FSW26; contact service center
RF preamplifier, 100 kHz to 43.5 GHz	R&S®FSW-B24	1313.0832.43	yes	for R&S®FSW43; no export license required; contact service center
RF preamplifier, 100 kHz to 50 GHz	R&S®FSW-B24	1313.0832.49	yes	for R&S®FSW50; no export license required; contact service center
RF preamplifier, 100 kHz to 50 GHz	R&S®FSW-B24	1313.0832.51	yes	for R&S®FSW50; export license required; contact service center
RF preamplifier, 100 kHz to 67 GHz	R&S®FSW-B24	1313.0832.66	yes	for R&S®FSW67; no export license required; contact service center
RF preamplifier, 100 kHz to 67 GHz	R&S®FSW-B24	1313.0832.67	yes	for R&S®FSW67; export license required; contact service center
Electronic attenuator, 1 dB steps	R&S®FSW-B25	1313.0990.02	yes	for R&S®FSW8/13/26; contact service center
USB mass memory write protection	R&S®FSW-B33	1313.3602.02	no	pre-installed in factory
40 MHz analysis bandwidth	R&S®FSW-B40	1313.0861.02	yes	user-retrofittable
80 MHz analysis bandwidth	R&S®FSW-B80	1313.0878.02	yes	user-retrofittable
160 MHz analysis bandwidth	R&S®FSW-B160	1325.4850.14	yes	contact service center
320 MHz analysis bandwidth	R&S®FSW-B320	1325.4867.14	yes	includes 200 MHz IF filter; contact service center
512 MHz analysis bandwidth	R&S®FSW-B512	1331.7106.14	yes	includes 200 MHz IF filter; contact service center
1.2 GHz analysis bandwidth	R&S®FSW-B1200	1331.6400.14	yes	for R&S®FSW26/43/50/67/85 ex-factory and for later upgrade of R&S®FSW instruments without analysis bandwidth option; for later upgrade of R&S®FSW instruments with analysis bandwidth option use R&S®FSW-U1200; not available in combination with R&S®FSW-B2000; contact service center
2 GHz analysis bandwidth	R&S®FSW-B2001	1331.6916.14	yes	for R&S®FSW26/43/50/67/85 ex-factory and for later upgrade of R&S®FSW instruments without analysis bandwidth option; for later upgrade of R&S®FSW instruments with R&S®FSW-B1200 option use R&S®FSW-U2001; not available in combination with R&S®FSW-B2000; contact service center
4.4 GHz analysis bandwidth	R&S®FSW-B4001	1338.5215.14	yes	for R&S®FSW43/50/67/85 ex-factory and for later upgrade of R&S®FSW instruments without analysis bandwidth option; for later upgrade of R&S®FSW instruments with R&S®FSW-B80-/B160-/B320-/B512 option use R&S®FSW-U4001; for R&S®FSW instruments with R&S®FSW-B1200-/B2001 option use R&S®FSW-U4002; not available in combination with R&S®FSW-B2000/-B5000; contact service center <sup>66</sup>

<sup>66</sup> The option is only retrofittable for instruments starting from the following serial numbers: R&S®FSW43: 101587, R&S®FSW50: 101420, R&S®FSW67: 101540, R&S®FSW85: 101650.

Designation	Type	Order No.	Retro-fittable	Remarks
6.4 GHz analysis bandwidth	R&S®FSW-B6001	1338.5221.14	yes	for R&S®FSW43/50/67/85 ex-factory and for later upgrade of R&S®FSW instruments without analysis bandwidth option; for later upgrade of R&S®FSW instruments with R&S®FSW-B80/-B160/-B320/-B512 option use R&S®FSW-U4001 and -U6001; for R&S®FSW instruments with R&S®FSW-B1200/-B2001 option use R&S®FSW-U4002 and -U6001; not available in combination with R&S®FSW-B2000/-B5000; contact service center <sup>66</sup>
8.312 GHz analysis bandwidth	R&S®FSW-B8001	1338.5238.14	yes	for R&S®FSW43/50/67/85 ex-factory and for later upgrade of R&S®FSW instruments without analysis bandwidth option; for later upgrade of R&S®FSW instruments with R&S®FSW-B80/-B160/-B320/-B512 option use R&S®FSW-U4001, -U6001 and -U8001; for R&S®FSW instruments with R&S®FSW-B1200/-B2001 option use R&S®FSW-U4002, -U6001 and -U8001; not available in combination with R&S®FSW-B2000/-B5000; contact service center <sup>66</sup>
2 GHz analysis bandwidth with external digitizer	R&S®FSW-B2000	1325.4750.02	yes	for R&S®FSW26/43/50/67/85; not available in combination with R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001/-B5000; uses RTO oscilloscope as digitizer; contact service center
5 GHz analysis bandwidth with external digitizer	R&S®FSW-B5000	1331.6997.43/ 1331.6997.85	yes	for R&S®FSW43/85 only; not available in combination with R&S®FSW-B2000/-B4001/-B6001/-B8001; uses R&S®RTO oscilloscope as digitizer; contact service center
Analog baseband inputs, 40 MHz analysis bandwidth	R&S®FSW-B71	1313.1651.13	yes	for R&S®FSW8/13; contact service center
Analog baseband inputs, 40 MHz analysis bandwidth	R&S®FSW-B71	1313.1651.26	yes	for R&S®FSW26/43/50; contact service center
Analog baseband inputs, 40 MHz analysis bandwidth	R&S®FSW-B71	1313.1651.67	yes	for R&S®FSW67; contact service center
Analog baseband inputs, 40 MHz analysis bandwidth	R&S®FSW-B71	1313.1651.86	yes	for R&S®FSW85; contact service center
80 MHz analysis bandwidth for analog baseband inputs	R&S®FSW-B71E	1313.6547.02	yes	R&S®FSW-B71 required; user-retrofittable
Oscilloscope baseband inputs	R&S®FSW-B2071	1331.8302.02	yes	user-retrofittable
Real-time spectrum analyzer 512 MHz, POI ≤ 15 µs	R&S®FSW-B512R	1331.7106.16	yes	contact service center includes 512 MHz analysis bandwidth and 200 MHz IF filter; export license required
Real-time spectrum analyzer 800 MHz, POI ≤ 15 µs	R&S®FSW-B800R	1331.6400.16	yes	for R&S®FSW26/43/50/67/85; contact service center includes 2000 MHz analysis bandwidth; not available in combination with R&S®FSW-B2000; export license required
Frequency extension 90 GHz	R&S®FSW-B90G	1331.7693.02	no	for R&S®FSW85 only; without preselection for f > 85 GHz

Designation	Type	Order No.	Retro-fittable	Remarks
I/Q memory extension 6 GB	R&S®FSW-B106	1331.6451.02	yes	R&S®FSW-B160/-U160/-B320 required; user-retrofittable
I/Q memory extension 8 GB	R&S®FSW-B108	1331.6751.02	yes	R&S®FSW-B1200/-U1200/-B2001/-U2001/ -B800R required; user-retrofittable
I/Q memory extension 24 GB	R&S®FSW-B124	1338.5273.02	yes	R&S®FSW-B4001/-U4001/-B6001/-U6001/ -B8001/-U8001 required; user-retrofittable
DIG IQ 40G streaming out interface	R&S®FSW-B517	1331.6980.02	yes	R&S®FSW-B512/-U512/-B1200/-U1200/ -B2001/-U2001/-B800R required; user-retrofittable
DIG IQ 40G streaming out interface, max. 1 GHz bandwidth	R&S®FSW-B1017	1350.7008.02	yes	R&S®FSW-B1200/-U1200/-B2001/-U2001/ -B800R required; user-retrofittable
Floating license smart card, with USB adapter	R&S®FSW-FL	1345.1940.02		

**Firmware**

Designation	Type	Order No.	Retro-fittable	Remarks
Pulse measurements	R&S®FSW-K6	1313.1322.02		
Time side lobe measurement	R&S®FSW-K6S	1325.3738.02		R&S®FSW-K6 option required
AM/FM/PM modulation analysis	R&S®FSW-K7	1313.1339.02		
GSM/EDGE/EDGE evolution/ VAMOS measurements <sup>67</sup>	R&S®FSW-K10	1313.1368.02		
VOR/ILS measurements	R&S®FSW-K15	1331.4388.02		contact service center
Multicarrier group delay measurements	R&S®FSW-K17	1313.4150.02		
Frequency subspan measurements for multi carrier group delay measurements	R&S®FSW-K17S	1338.5896.02		R&S®FSW-K17 option and one of the R&S®FSW-B512/-B512R/ -B1200/-B2001/-B800R/-B4001/ -B6001/-B8001 options required
Amplifier measurements	R&S®FSW-K18	1325.2170.02		
Direct DPD measurements	R&S®FSW-K18D	1331.6845.02		R&S®FSW-K18 option required
Frequency response measurements	R&S®FSW-K18F	1338.7230.02		R&S®FSW-K18 option required
Memory polynomial DPD	R&S®FSW-K18M	1345.1470.02		R&S®FSW-K18 and R&S®FSW-K18D options required
Noise power ratio measurements	R&S®FSW-K19	1331.8283.02		
Noise figure measurements <sup>67</sup>	R&S®FSW-K30	1313.1380.02		
Security write protection of solid state drive	R&S®FSW-K33	1322.7936.02		
Phase noise measurements <sup>67</sup>	R&S®FSW-K40	1313.1397.02		
Spurious measurements	R&S®FSW-K50	1325.2893.02		
EMI measurements	R&S®FSW-K54	1313.1400.02		
CISPR calibration for R&S®FSW-K54	R&S®FSW-K54CAL	1331.5932.02		in line with ISO 17025 and ISO 9000; R&S®FSW-K54 option required
Transient measurement application	R&S®FSW-K60	1313.7495.02		
Transient hop measurement	R&S®FSW-K60H	1322.9916.02		R&S®FSW-K60 option required
Transient chirp measurement	R&S®FSW-K60C	1322.9745.02		R&S®FSW-K60 option required
Vector signal analysis <sup>67</sup>	R&S®FSW-K70	1313.1416.02		
Multi-modulation analysis <sup>67</sup>	R&S®FSW-K70M	1338.4177.02		R&S®FSW-K70 option required
BER PRBS measurements <sup>67</sup>	R&S®FSW-K70P	1338.3893.02		R&S®FSW-K70 option required
3GPP FDD (WCDMA) BS measurements (incl. HSDPA and HSDPA+) <sup>67</sup>	R&S®FSW-K72	1313.1422.02		
3GPP FDD (WCDMA) MS measurements (incl. HSUPA and HSUPA+) <sup>67</sup>	R&S®FSW-K73	1313.1439.02		
TD-SCDMA BS measurements	R&S®FSW-K76	1313.1445.02		
TD-SCDMA UE measurements	R&S®FSW-K77	1313.1451.02		
CDMA2000® BS measurements	R&S®FSW-K82	1313.1468.02		
CDMA2000® MS measurements	R&S®FSW-K83	1313.1474.02		
1xEV-DO BS measurements	R&S®FSW-K84	1313.1480.02		
1xEV-DO MS measurements	R&S®FSW-K85	1313.1497.02		
WLAN 802.11a/b/g measurements <sup>67</sup>	R&S®FSW-K91	1313.1500.02		to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B40/-B80/-B160/ -B320/-B512/-B512R/-B1200/ -B2001/-B800R/-B4001/-B6001/ -B8001 options required
WLAN 802.11n measurements <sup>67</sup>	R&S®FSW-K91N	1313.1516.02		R&S®FSW-K91 required;
WLAN 802.11ac measurements <sup>67</sup>	R&S®FSW-K91AC	1313.4209.02		to support signal analysis bandwidths > 10 MHz, one of the
WLAN 802.11ax measurements <sup>67</sup>	R&S®FSW-K91AX	1331.6345.02		R&S®FSW-B40/-B80/-B160/ -B320/-B512/-B512R/-B1200/ -B2001/-B800R/-B4001/-B6001/ -B8001 options required
WLAN 802.11be measurements <sup>67</sup>	R&S®FSW-K91BE	1350.6730.02		
WLAN 802.11p measurements <sup>67</sup>	R&S®FSW-K91P	1321.5646.02		
WLAN 802.11ad measurements <sup>67</sup>	R&S®FSW-K95	1313.1639.02		R&S®FSW-B2001/-B800R/ -B2000/-B5000/-B4001/-B6001/ -B8001 option required
OFDM signal analysis	R&S®FSW-K96	1313.1539.02		
WLAN 802.11ay measurements <sup>67</sup>	R&S®FSW-K97	1338.4902.02		R&S®FSW-B2001/-B800R/ -B2000/-B5000/-B4001/-B6001/ -B8001 option required

<sup>67</sup> Also available as floating license. Order number is xxxx.xxxx.51 instead of xxxx.xxxx.02 and requires R&S®FSW-FL hardware option.

Designation	Type	Order No.	Retro-fittable	Remarks
EUTRA/LTE FDD BS measurements <sup>67</sup>	R&S®FSW-K100	1313.1545.02		to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options required
EUTRA/LTE FDD UE measurements <sup>67</sup>	R&S®FSW-K101	1313.1551.02		
EUTRA/LTE BS MIMO measurements <sup>67</sup>	R&S®FSW-K102	1313.1568.02		R&S®FSW-K100 or R&S®FSW-K104 option required to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options required
EUTRA/LTE-Advanced uplink measurements <sup>67</sup>	R&S®FSW-K103	1313.2478.02		R&S®FSW-K101 or R&S®FSW-K105 option required to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options required
EUTRA/LTE TDD BS measurements <sup>67</sup>	R&S®FSW-K104	1313.1574.02		to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options required
EUTRA/LTE TDD uplink measurements <sup>67</sup>	R&S®FSW-K105	1313.1580.02		
EUTRA/LTE NB-IoT downlink measurements <sup>67</sup>	R&S®FSW-K106	1331.6351.02		R&S®FSW-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options required
VERIZON 5GTF DL	R&S®FSW-K118	1331.7370.02		one of the R&S®FSW-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options required
VERIZON 5GTF UL	R&S®FSW-K119	1331.8060.02		
5G NR Rel. 15 downlink measurements <sup>67</sup>	R&S®FSW-K144	1338.3606.02		
5G NR Rel. 15 uplink measurements <sup>67</sup>	R&S®FSW-K145	1338.3612.02		
5G NR combined ACLR/SEM/EVM measurements <sup>67</sup>	R&S®FSW-K147	1338.6486.02		R&S®FSW-K144 or R&S®FSW-K145 option required
5G NR Rel. 16 extension for uplink/downlink <sup>67</sup>	R&S®FSW-K148	1350.6624.02		R&S®FSW-K144 or R&S®FSW-K145 option required
HRP UWB measurements <sup>67</sup>	R&S®FSW-K149	1350.6930.02		R&S®FSW-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options required
5G NR Rel. 17 extension for uplink/downlink	R&S®FSW-K171	1350.7108.02		R&S®FSW-K144/-145 and R&S®FSW-K148 options required
DOCSIS 3.1 OFDM downstream	R&S®FSW-K192	1325.4138.02		one of the R&S®FSW-B320/-B512 options required
DOCSIS 3.1 OFDMA upstream	R&S®FSW-K193	1325.4144.02		
OneWeb reverse link measurements	R&S®FSW-K201	1331.7387.02		one of the R&S®FSW-B40/-B80/-B160/-B320/-B512/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options required
160 MHz real-time measurement application, POI ≤ 15 µs	R&S®FSW-K161R	1338.2700.02		one of the R&S®FSW-B160/-B320 options required; not available for R&S®FSW-B512/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options no export license required
512 MHz real-time measurement application, POI > 15 µs	R&S®FSW-K512RE	1338.4731.02		R&S®FSW-B512 required; not available for R&S®FSW-B160/-B320/-B512R/-B1200/-B2001/-B800R/-B4001/-B6001/-B8001 options no export license required

Designation	Type	Order No.	Retro-fittable	Remarks
User-defined frequency correction by SnP file <sup>67</sup>	R&S®FSW-K544	1338.2716.02		corrects frequency response (amplitude and phase) of measurement setup
Custom digital baseband connection	R&S®FSW-K552	1338.4554.02		R&S®FSW-B517 or R&S®FSW-K1017 option required
External frontend control	R&S®FSW-K553	1350.6118.02		
800 MHz real-time measurement application, POI > 15 µs	R&S®FSW-K800RE	1338.7801.02		one of the R&S®FSW-B1200/-B2001 options required; not available for R&S®FSW-B160/-B320/-B512/-B512R/-B800R/-B4001/-B6001/-B8001 options no export license required
Health and utilization monitoring service (HUMS)	R&S®FSW-K980	1350.6718.02		

**PC software**

Designation	Type	Order No. <sup>68</sup>
R&S®VSE basic edition <sup>69, 70</sup>	R&S®VSE	1345.1011.06
R&S®VSE enterprise edition <sup>71</sup>	R&S®VSE	1345.1105.06
Pulse measurement application <sup>71, 72</sup>	R&S®VSE-K6	1320.7516.06
AM/FM/PM modulation analysis <sup>71, 72</sup>	R&S®VSE-K7	1320.7539.06
GSM measurements <sup>71, 72</sup>	R&S®VSE-K10	1313.1368.06
Transient measurements <sup>71, 72</sup>	R&S®VSE-K60	1320.7868.06
Transient chirp measurements <sup>71, 72</sup>	R&S®VSE-K60C	1320.7874.06
Transient hop measurements <sup>71, 72</sup>	R&S®VSE-K60H	1320.7880.06
Vector signal analysis <sup>71, 72</sup>	R&S®VSE-K70	1320.7522.06
3GPP FDD measurements <sup>71, 72</sup>	R&S®VSE-K72	1320.7580.06
IEEE 802.11a/b/g measurements <sup>71, 72</sup>	R&S®VSE-K91	1320.7597.06
IEEE 802.11p measurements <sup>71, 72</sup>	R&S®VSE-K91p	1320.7680.06
IEEE 802.11n measurements <sup>71, 72</sup>	R&S®VSE-K91n	1320.7600.06
IEEE 802.11ac measurements <sup>71, 72</sup>	R&S®VSE-K91ac	1320.7616.06
OFDM signal analysis <sup>71, 72</sup>	R&S®VSE-K96	1320.7922.06
EUTRA/LTE FDD uplink and downlink measurement application <sup>71, 72</sup>	R&S®VSE-K100	1320.7545.06
EUTRA/LTE Advanced and MIMO (downlink) <sup>71, 72, 73</sup>	R&S®VSE-K102	1320.7551.06
EUTRA/LTE TDD uplink and downlink measurement application <sup>71, 72</sup>	R&S®VSE-K104	1320.7568.06
EUTRA/LTE narrowband IoT analysis <sup>71, 72</sup>	R&S®VSE-K106	1320.7900.06
5G NR downlink/uplink measurements <sup>71, 72</sup>	R&S®VSE-K144	1309.9574.06
User-defined frequency correction by SnP file <sup>71, 72</sup>	R&S®VSE-K544	1309.9580.06
<b>License dongle</b>		
License dongle	R&S®FSPC	1310.0002.03
Floating license dongle	R&S®FSPC-FL	1310.0002.04
<b>Service option</b>		
R&S®VSE software maintenance	R&S®VSE-SWM	1320.7622.81

<sup>68</sup> To obtain the floating license of the product R&S®FSPC-FL is required and order number xxxx.xxxx.51 must be used instead of xxxx.xxxx.06.<sup>69</sup> Requires R&S®FSPC.<sup>70</sup> Not available for R&S®FSPC-FL.<sup>71</sup> Requires R&S®FSPC or R&S®FSPC-FL.<sup>72</sup> Requires R&S®VSE or R&S®VSE Enterprise.<sup>73</sup> Requires R&S®VSE-K100 or R&S®VSE-K104.

## Upgrades

Designation	Type	Order No.	Retro-fittable	Remarks
Upgrade kit for enhanced dynamic range preamplifier <sup>74</sup>	R&S®FSW-B24U	1350.7443.43	yes	for R&S®FSW43
		1350.7443.49	yes	for R&S®FSW50
		1350.7443.51	yes	for R&S®FSW50; export license required
		1350.7443.66	yes	for R&S®FSW67
		1350.7443.67	yes	for R&S®FSW67; export license required
		1350.7443.70	yes	for R&S®FSW67
		1350.7443.71	yes	for R&S®FSW67; export license required
Analysis bandwidth upgrade from 28 MHz to 40 MHz	R&S®FSW-U40	1313.5205.02	yes	user-retrofittable;
Analysis bandwidth upgrade from 40 MHz to 80 MHz	R&S®FSW-U80	1313.5211.02	yes	user-retrofittable; R&S®FSW-B40 or R&S®FSW-U40 required
Analysis bandwidth upgrade from 80 MHz to 160 MHz	R&S®FSW-U160	1325.5357.14	yes	contact service center; R&S®FSW-B80 or R&S®FSW-U80 required
Analysis bandwidth upgrade from 160 MHz to 320 MHz	R&S®FSW-U320	1313.7189.02	yes	user-retrofittable; R&S®FSW-B160/-U160 required
Analysis bandwidth upgrade from 80 MHz to 512 MHz	R&S®FSW-U512	1321.6320.24	yes	contact service center; R&S®FSW-B80 or R&S®FSW-U80 required; excludes R&S®FSW-B160/-U160/-B320
Analysis bandwidth upgrade from 80 MHz, 160 MHz, 320 MHz, 512 MHz to 1.2 GHz	R&S®FSW-U1200	1331.7006.14	yes	contact service center; for R&S®FSW26/43/50/67/85; R&S®FSW-B80 or R&S®FSW-B160/-U160 or R&S®FSW-B320/-U320 or R&S®FSW-B512/-U512 required. Not available for instruments with R&S®FSW-B512R, R&S®FSW-U512R, R&S®FSW-B2000
Analysis bandwidth upgrade from 1.2 GHz to 2 GHz	R&S®FSW-U2001	1331.7070.02	yes	R&S®FSW-B1200 or R&S®FSW-U1200 required; user-retrofittable, calibration recommended to verify specifications
Upgrade Real-time spectrum analyzer 512 MHz POI ≤ 15 µs	R&S®FSW-U512R	1321.6320.26	yes	contact service center; includes 512 MHz analysis bandwidth; R&S®FSW-B80 or R&S®FSW-U80 required; export license required
Analysis bandwidth upgrade from 80 MHz, 160 MHz, 320 MHz, 512 MHz to 4.4 GHz	R&S®FSW-U4001	1338.5244.43	yes	contact service center <sup>66</sup> for R&S®FSW43/50/67/85; R&S®FSW-B80 or R&S®FSW-B160/-U160 or R&S®FSW-B320/-U320 or R&S®FSW-B512/-U512 required. Not available for instruments with R&S®FSW-B512R, R&S®FSW-U512R, R&S®FSW-B2000, R&S®FSW-B5000

<sup>74</sup> Upgrade for enhanced dynamic range preamplifier. Only available for instruments with the R&S®FSW-B24 option. Retrofittable in Rohde & Schwarz service center. For instruments starting from the following serial numbers R&S®FSW43: 102224, R&S®FSW50: 101676, R&S®FSW67: 101721 the enhanced dynamic range preamplifier is included in the R&S®FSW-B24 option.

Designation	Type	Order No.	Retro-fittable	Remarks
Analysis bandwidth upgrade from 1.2 GHz, 2 GHz to 4.4 GHz	R&S®FSW-U4002	1338.6192.43	yes	contact service center <sup>66</sup> for R&S®FSW43/50/67/85; R&S®FSW-B1200/-U1200 or R&S®FSW-B2001/-U2001 required. Not available for instruments with R&S®FSW-B512R, R&S®FSW-U512R, R&S®FSW-B2000, R&S®FSW-B5000
Analysis bandwidth upgrade from 4.4 GHz to 6.4 GHz	R&S®FSW-U6001	1338.5250.02	yes	for R&S®FSW43/50/67/85; R&S®FSW-B4001/-U4001/-U4002 required user-retrofittable, calibration recommended to verify specifications
Analysis bandwidth upgrade from 6.4 GHz to 8.312 GHz	R&S®FSW-U8001	1338.5267.02	yes	for R&S®FSW43/50/67/85; R&S®FSW-B6001/-U6001 required user-retrofittable, calibration recommended to verify specifications
Upgrade to 5 GHz signal analysis bandwidth with external digitizer	R&S®FSW-U5000	1331.7629.44	yes	for R&S®FSW43; uses R&S®RTO oscilloscope as digitizer; contact service center
Upgrade to 5 GHz signal analysis bandwidth with external digitizer	R&S®FSW-U5000	1331.7629.86	yes	for R&S®FSW85; uses R&S®RTO oscilloscope as digitizer; contact service center

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE bus cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE bus cable, length: 2 m	R&S®PCK	0292.2013.20
19" rack adapter	R&S®ZZA-KN5	1175.3040.00
<b>Noise sources</b>		
Smart noise sources for noise figure and gain measurement up to 67 GHz (requires R&S®FSW-K30)	R&S®FS-SNS18/26/40/55/67	1338.8008.xx (xx = 18/26/40/55/67)
<b>Matching pads, 50/75 Ω</b>		
L section, matching at both ends	R&S®RAM	0358.5414.02
Series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>High-power attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>RF adapters and cables</b>		
Coaxial adapter, 1.00 mm (f) – 1.00 mm (f)		3592.8694.00
Coaxial adapter, 1.00 mm (f) – 1.85 mm (f)		3628.4734.02
Coaxial adapter, 1.85 mm (f) – 1.85 mm (f)		3588.9654.00
Coaxial semi-rigid cable, 1.85 mm (m) - 1.85 mm (m), length: 90 mm, U shape		1325.1251.00
Coaxial adapter, 1.85 mm (f) – 2.92 mm (f)		3628.4728.02
Coaxial adapter, 2.92 mm (f) – 2.92 mm (f)		3588.8664.00
Coaxial adapter, 3.5 mm (f) – 3.5 mm (f), APC3.5-compatible		3689.9442.00
Coaxial adapter, 3.5 mm (m) – 3.5 mm (m), APC3.5-compatible		3587.7770.00
Coaxial adapter, N (f) – 3.5 mm (m), APC3.5-compatible		3587.7806.00
Coaxial adapter, N (f) – 3.5 mm (f), APC3.5-compatible		3587.7829.00
Coaxial cable, SMA (m) – SMA (m), length: 1 m		3586.9970.00
DUT positioner for R&S®FSW85	R&S®FS-Z124	1338.4783.02
<b>Connectors and cables</b>		
Probe power connector, 3-pin		1065.9480.00
Type N adapter for R&S®RT-Zxx oscilloscope probes	R&S®RT-ZA9	1417.0909.02
Cable for connecting digital baseband interfaces of Rohde & Schwarz instruments (accessory for R&S®FSW-B17)	R&S®SMU-Z6	1415.0201.02
Cable for connecting high speed digital baseband interfaces of Rohde & Schwarz instruments (accessory for R&S®FSW-B517)	R&S®DIGIQ-HS	3641.2948.03
<b>DC blocks</b>		
DC block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.03
<b>External harmonic mixers</b>		
<b>(for R&amp;S®FSW26, R&amp;S®FSW43, R&amp;S®FSW50, R&amp;S®FSW67 and R&amp;S®FSW85 with R&amp;S®FSW-B21 option)</b>		
Harmonic mixer, 40 GHz to 60 GHz	RPG FS-Z60 <sup>75</sup>	1048.0171.02
Harmonic mixer, 50 GHz to 75 GHz	RPG FS-Z75 <sup>75</sup>	3638.2240.02
Harmonic mixer, 60 GHz to 90 GHz	RPG FS-Z90 <sup>75</sup>	3638.2270.02
Harmonic mixer, 75 GHz to 110 GHz	RPG FS-Z110 <sup>75</sup>	3638.2292.02
Harmonic mixer, 90 GHz to 140 GHz	RPG FS-Z140 <sup>75</sup>	3622.0708.02
Harmonic mixer, 110 GHz to 170 GHz	RPG FS-Z170 <sup>75</sup>	3622.0714.02
Harmonic mixer, 140 GHz to 220 GHz	RPG FS-Z220 <sup>75</sup>	3593.3250.02
Harmonic mixer, 220 GHz to 325 GHz	RPG FS-Z325 <sup>75</sup>	3593.3267.02
Harmonic mixer, 325 GHz to 500 GHz	RPG FS-Z500 <sup>75</sup>	3593.3273.02
<b>Waveguide to coaxial adapters</b>		
Waveguide to coaxial adapter, WR10 – 1 mm (f)	WCA110	3626.1067.02
Waveguide to coaxial adapter, WR10 – 1 mm (m)	WCA110	3626.1067.03
Waveguide to coaxial adapter, WR12 – 1 mm (m)	WCA90	3626.1050.03
Waveguide to coaxial adapter, WR15 – 1 mm (f)	WCA75	3626.1044.02
Waveguide to coaxial adapter, WR15 – 1 mm (m)	WCA75	3626.1044.03
Waveguide to coaxial adapter, WR12 – 1 mm (f)	WCA90	3626.1050.02

<sup>75</sup> RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company.

Designation	Type	Order No.
<b>Horn antennas</b>		
Horn antenna, 110 GHz to 170 GHz	FH-SG-170	3629.2493.02
Horn antenna, 26 GHz to 40 GHz	FH-SG-40	3629.2393.02
Horn antenna, 50 GHz to 75 GHz	FH-SG-75	3629.2458.02
Horn antenna, 60 GHz to 90 GHz	FH-SG-90	3629.2464.02
<b>Tools</b>		
Torque wrench for type N connectors, 1.5 Nm coupling torque (for R&S®FSW8/13)	R&S®ZN-ZTW	1328.8534.71
Torque wrench for 3.5/2.92/2.4/1.85 mm connectors, 0.9 Nm coupling torque (for R&S®FSW26/43/50/67)	R&S®ZN-ZTW	1328.8534.35
Torque wrench for 1.0 mm connectors, 0.23 Nm coupling torque (for R&S®FSW85)	R&S®ZN-ZTW	1328.8534.11

## Power sensors supported<sup>76</sup>

Designation	Type	Order No.
<b>Universal power sensors</b>		
10 MHz to 8 GHz, 100 mW, 2-path	R&S®NRP-Z211	1417.0409.02
10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11 <sup>77</sup>	1138.3004.02
10 MHz to 18 GHz, 100 mW, 2-path	R&S®NRP-Z221	1417.0309.02
10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21 <sup>77</sup>	1137.6000.02
10 MHz to 18 GHz, 2 W	R&S®NRP-Z22 <sup>77</sup>	1137.7506.02
10 MHz to 18 GHz, 15 W	R&S®NRP-Z23 <sup>77</sup>	1137.8002.02
10 MHz to 18 GHz, 30 W	R&S®NRP-Z24 <sup>77</sup>	1137.8502.02
<b>Power sensor modules with power splitter</b>		
DC to 18 GHz, 500 mW	R&S®NRP-Z27	1169.4102.02
DC to 26.5 GHz, 500 mW	R&S®NRP-Z37	1169.3206.02
<b>Thermal power sensors<sup>78</sup></b>		
0 Hz to 18 GHz, 100 mW	R&S®NRP18T	1424.6115.02
0 Hz to 18 GHz, 100 mW, LAN version	R&S®NRP18TN	1424.6121.02
0 Hz to 33 GHz, 100 mW	R&S®NRP33T	1424.6138.02
0 Hz to 33 GHz, 100 mW, LAN version	R&S®NRP33TN	1424.6144.02
0 Hz to 40 GHz, 100 mW	R&S®NRP40T	1424.6150.02
0 Hz to 40 GHz, 100 mW, LAN version	R&S®NRP40TN	1424.6167.02
0 Hz to 50 GHz, 100 mW	R&S®NRP50T	1424.6173.02
0 Hz to 50 GHz, 100 mW, LAN version	R&S®NRP50TN	1424.6180.02
0 Hz to 67 GHz, 100 mW	R&S®NRP67T	1424.6196.02
0 Hz to 67 GHz, 100 mW, LAN version	R&S®NRP67TN	1424.6209.02
0 Hz to 90 GHz, 100 mW	R&S®NRP90T	1424.6473.02
0 Hz to 90 GHz, 100 mW, LAN version	R&S®NRP90TN	1424.6480.02
0 Hz to 110 GHz, 100 mW	R&S®NRP110T	1424.6215.02
<b>Thermal waveguide power sensors</b>		
50 GHz to 75 GHz, 100 mW	R&S®NRP75TWG	1700.2529.02
60 GHz to 90 GHz, 100 mW	R&S®NRP90TWG	1700.2312.02
75 GHz to 110 GHz, 100 mW	R&S®NRP110TWG	1173.8709.02
<b>Average power sensors<sup>78</sup></b>		
8 kHz to 6 GHz, 200 mW	R&S®NRP6A	1424.6796.02
8 kHz to 6 GHz, 200 mW, LAN version	R&S®NRP6AN	1424.6809.02
9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91 <sup>77</sup>	1168.8004.02
8 kHz to 18 GHz, 200 mW	R&S®NRP18A	1424.6815.02
8 kHz to 18 GHz, 200 mW, LAN version	R&S®NRP18AN	1424.6821.02
<b>Three path diode power sensors<sup>78</sup></b>		
100 pW to 200 mW, 10 MHz to 8 GHz	R&S®NRP8S	1419.0006.02
100 pW to 200 mW, 10 MHz to 8 GHz, LAN version	R&S®NRP8SN	1419.0012.02
100 pW to 200 mW, 10 MHz to 18 GHz	R&S®NRP18S	1419.0029.02
100 pW to 200 mW, 10 MHz to 18 GHz, LAN version	R&S®NRP18SN	1419.0035.02
1 nW to 2 W, 10 MHz to 18 GHz	R&S®NRP18S-10	1424.6721.02
10 nW to 15 W, 10 MHz to 18 GHz	R&S®NRP18S-20	1424.6738.02
30 nW to 30 W, 10 MHz to 18 GHz	R&S®NRP18S-25	1424.6744.02
100 pW to 200 mW, 10 MHz to 33 GHz	R&S®NRP33S	1419.0064.02
100 pW to 200 mW, 10 MHz to 33 GHz, LAN version	R&S®NRP33SN	1419.0070.02
100 pW to 200 mW, 10 MHz to 33 GHz, LAN version, TVAC-compliant	R&S®NRP33SN-V	1419.0129.02
100 pW to 100 mW, 50 MHz to 40 GHz	R&S®NRP40S	1419.0041.02
100 pW to 100 mW, 50 MHz to 40 GHz, LAN version	R&S®NRP40SN	1419.0058.02
100 pW to 100 mW, 50 MHz to 50 GHz	R&S®NRP50S	1419.0087.02
100 pW to 100 mW, 50 MHz to 50 GHz, LAN version	R&S®NRP50SN	1419.0093.02
100 pW to 100 mW, 50 MHz to 67 GHz	R&S®NRP67S	1424.6396.02
100 pW to 100 mW, 50 MHz to 67 GHz, LAN version	R&S®NRP67SN	1424.6409.02
100 pW to 100 mW, 50 MHz to 67 GHz, LAN version, TVAC-compliant	R&S®NRP67SN-V	1424.6415.02
<b>Wideband power sensors<sup>78</sup></b>		
50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
50 MHz to 40 GHz, 100 mW (2.92 mm)	R&S®NRP-Z85	1411.7501.02
50 MHz to 40 GHz, 100 mW (2.40 mm)	R&S®NRP-Z86	1417.0109.40
50 MHz to 44 GHz, 100 mW (2.40 mm)	R&S®NRP-Z86	1417.0109.44

<sup>76</sup> For average power measurement only.<sup>77</sup> Product discontinued.<sup>78</sup> In addition to RF power measurements the R&S®NRP-Z8x, R&S®NRPxxT/TN, R&S®NRPxxA/AN and R&S®NRPxxS/SN power sensors can be used as wideband RF power trigger sources.

## Probes supported by R&S®FSW-B71/-B71E option

Designation	Type	Order No.
1.0 GHz, active, 1 MΩ, 0.8 pF	R&S®RT-ZS10E	1418.7007.02
1.0 GHz, active, 1 MΩ, 0.8 pF, micro button	R&S®RT-ZS10	1410.4080.02
1.5 GHz, active, 1 MΩ, 0.8 pF, micro button	R&S®RT-ZS20	1410.3502.02
3.0 GHz, active, 1 MΩ, 0.8 pF, micro button	R&S®RT-ZS30	1410.4309.02
6.0 GHz, active, 1 MΩ, 0.3 pF, micro button	R&S®RT-ZS60	1418.7307.02
1.5 GHz, active, differential, 1 MΩ, 0.6 pF, micro button	R&S®RT-ZD20	1410.4409.02
3.0 GHz, active, differential, 1 MΩ, 0.6 pF, micro button	R&S®RT-ZD30	1410.4609.02
4.5 GHz, active, differential, 1 MΩ, 0.4 pF, micro button	R&S®RT-ZD40	1410.5205.02
1.5 GHz modular probe amplifier, differential, 400 kΩ, multimode, incl. R&S®ProbeMeter; micro button	R&S®RT-ZM15	1800.4700.02
3 GHz modular probe amplifier, differential, 400 kΩ, multimode, incl. R&S®ProbeMeter; micro button	R&S®RT-ZM30	1419.3005.02
6 GHz modular probe amplifier, differential, 400 kΩ, multimode, incl. R&S®ProbeMeter; micro button	R&S®RT-ZM60	1419.3105.02
9 GHz modular probe amplifier, differential, 400 kΩ, multimode, incl. R&S®ProbeMeter; micro button	R&S®RT-ZM90	1419.4301.02
<b>Extras for modular probes</b>		
Tip cable, solder in, extended temperature, length: 15 cm, multimode compatible	R&S®RT-ZMA11	1419.4318.02
Tip cable, square pin, for 1.27 mm pin header, length: 15 cm, multimode compatible	R&S®RT-ZMA12	1419.4324.02
Tip cable, quick connect, for solder in resistor connection, length: 15 cm, multimode compatible	R&S®RT-ZMA15	1419.4224.02
Browser module, variable span from 0.5 mm to 8 mm, spring-loaded, incl. spring loaded resistor tips (2 pairs)	R&S®RT-ZMA30	1419.4353.02
SMA module, 2.92 mm/3.5 mm/SMA, differential, 100 Ω, DC termination, multimode compatible; incl. lead 11 cm (4.3 in)	R&S®RT-ZMA40	1419.4201.02
Extended temperature kit, 1 m matched cable pair, multimode compatible, incl. R&S®RT-ZMA11	R&S®RT-ZMA50	1419.4218.02

## Oscilloscopes supported by R&S®FSW-B2000/-B2071 option

Designation	Type	Order No.
Oscilloscope, 4 GHz, 20 Gsample/s, 20/80 Msample, 4 channels	R&S®RTO1044 <sup>77</sup>	1316.1000.44
Oscilloscope, 1 GHz, 10 Gsample/s, 20/80 Msample, 4 channels and upgrade of the R&S®RTO1014 to 4 GHz bandwidth	R&S®RTO1014 with R&S®RTO-B204 <sup>77</sup>	1316.1000.14 with 1316.1369.02
OCXO 10 MHz	R&S®RTO-B4	1304.8305.02
Memory upgrade, 50 Msample per channel	R&S®RTO-B101	1304.8428.02
Memory upgrade, 100 Msample per channel	R&S®RTO-B102	1304.8434.02
Memory upgrade, 200 Msample per channel	R&S®RTO-B103	1304.8440.02
Memory upgrade, 400 Msample per channel	R&S®RTO-B104	1304.8457.02

Designation	Type	Order No.
Oscilloscope, 4 GHz, 20 Gsample/s, 50/200 Msample, 4 channels	R&S®RTO2044	1329.7002.44
OCXO 10 MHz	R&S®RTO-B4	1304.8305.02
Memory upgrade, 100 Msample per channel	R&S®RTO-B101	1329.7060.02
Memory upgrade, 200 Msample per channel	R&S®RTO-B102	1329.7077.02
Memory upgrade, 400 Msample per channel	R&S®RTO-B104	1329.7083.02
Memory upgrade, 1 Gsample per channel	R&S®RTO-B110	1329.7090.04

## Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option

Designation	Type	Order No.
Oscilloscope, 6 GHz, 20 Gsample/s, 50/200 Msample, 4 channels	R&S®RTO2064	1329.7002.64
OCXO 10 MHz	R&S®RTO-B4	1304.8305.02
Memory upgrade, 100 Msample per channel	R&S®RTO-B101	1329.7060.02
Memory upgrade, 200 Msample per channel	R&S®RTO-B102	1329.7077.02
Memory upgrade, 400 Msample per channel	R&S®RTO-B104	1329.7083.02
Memory upgrade, 1 Gsample per channel	R&S®RTO-B110	1329.7090.04

## Oscilloscopes supported by R&S®FSW-B2071 option

Designation	Type	Order No.
Oscilloscope, 200/800 Mpoints, 4 channels, bandwidth option required	R&S®RTO6	1802.0001.04
Bandwidth option, 4 GHz, 20 Gsample/s	R&S®RTO6-B94	1802.0224.02
Bandwidth option, 6 GHz, 20 Gsample/s	R&S®RTO6-B96	1802.0230.02

## Service options

Warranty		
Base unit		3 years
All other items <sup>79</sup>		1 year
Service options		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

### Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge <sup>80</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

### Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>80</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

### Extended warranty with accredited calibration (AW1 and AW2)

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs <sup>80</sup> and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

<sup>79</sup> For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

<sup>80</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.





## Service that adds value

- Worldwide
- Local and personalized
- Customized and flexible
- Uncompromising quality
- Long-term dependability

## Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Sustainable product design

- Environmental compatibility and eco-footprint
- Energy efficiency and low emissions
- Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

