

# MTS/T-BERD™ Platforms

## Short Range LAN (SRL) OTDR Module



### Key Features

- Optimized for 10 Gigabit Ethernet (GigE) multimode testing
- FTTx-ready with 1310 and 1550 nm wavelengths
- CWDM/DWDM-ready with 1310, 1550, and 1625 nm wavelengths
- Dual-, Quad- and Penta-lambda multimode and singlemode combined
- 0.5/0.8 meter (m) event dead zone in multimode/singlemode for highest network precision
- High dynamic range (24/24/40/38/37 dB)
- Bend detection in singlemode
- Propagation delay measurement in multimode



### Applications

- Access/Local Area Network (LAN) construction and turn-up
- Access/LAN troubleshooting

### Multi-application optical test module

In today's telecommunications market, test solutions must be cost-effective, increase productivity, and reduce the complexity of field testing. The JDSU Short Range LAN (SRL) optical time domain reflectometer (OTDR) module offers a high-performance test functionality that has been specifically developed in response to these industry demands.

Configurable at the time of order, the SRL OTDR module offers multiple wavelength test capabilities (850, 1300, 1310, 1550, and 1625 nm), providing field technicians with all-in-one test instrument.

The SRL OTDR module's performance enables effective testing on short-haul (Access and LAN) in both multimode and singlemode.

OTDRs are the primary test tool for fiber optic characterization and enable several measurements, including fiber link attenuation, attenuation coefficient, reflection, splice/connector loss, and point-of-error.

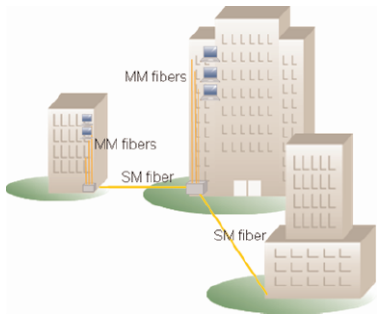


Figure 1 LAN network architecture

**The right test solution at the right wavelength**

As fiber installers and technicians continue to look for ways to reduce time and costs during field operation, it is essential for them to use the right tool for the job at hand. The combination of an unprecedented 0.1 s refreshing time, the shortest event resolution (0.5/2 m event dead zones in multimode, 0.8/4 m in singlemode), and a high dynamic range makes the SRL OTDR module an ideal tool for the qualification of any type of LAN or Access network. The SRL OTDR module accommodates multiple applications:

- For multimode LAN, a dual-wavelength (850/1300 nm) SRL OTDR Module is available for fiber characterization, installation and troubleshooting
- For LAN and Access networks, multimode and singlemode are combined in a quad-wavelength (850/1300/1310/1550 nm) SRL OTDR Module, offering full flexibility in the field. A penta-wavelength version combines out-of-band testing capabilities at 1625 nm with the quad module

**A new standard in OTDR performance**

The SRL OTDR module is a high-performance OTDR capable of characterizing multimode and singlemode fiber link sections that are traditionally difficult. With a 0.5/0.8 m event dead zone in multimode/singlemode, it is now possible to qualify and troubleshoot problems in never before investigated sections of the fiber link:

- Pinpoint any fault in the network
- Discriminate a failure or break within the patch panel or distribution frame
- Reduce testing time for short-haul and multimode LAN
- Obtain a superior and cleaner trace form for high link loss


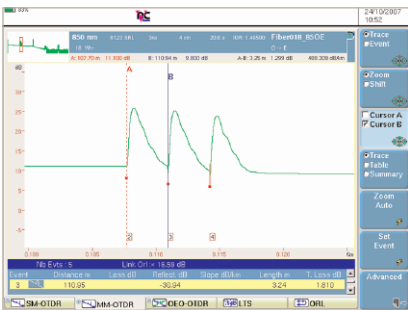


Figure 2 High detection of close events

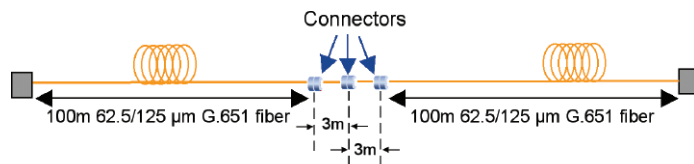

**Improve productivity and efficiency in the field with JDSU's innovative software**

With the impressive performance of the SRL OTDR module, the time required to characterize, test and troubleshoot a fiber network is drastically reduced. Test any fiber link or network configuration in record time!

- The SRL OTDR module configures itself with its automated functionality and sets the best-suited acquisition parameters, including optimized acquisition time, as defined by the instrument
- Obtain the trace form with the correct auto zoom, evaluate the fiber link, and save the results through one-button operation
- Quickly review your test result thanks to the summary screen, including bend detection in singlemode and the propagation delay measurement in multimode (according to ANSI/TIA/EIA 568 B.3 and ISO/IEC 11801 standards)
- Minimize handling errors with the pass/fail indicator—by viewing a quick snapshot, technicians can easily identify incorrect results

Summary Table						
Laser nm	T. Loss dB	Total OTDR dB	Distance m	Splice Max dB	Connector Max dB	Reflect. Max dB
1300	0.853	< 19.13	212.79		0.065	-28.18
Nb. Evts 6						
Propagation Delay						
Laser nm	Propagation Delay us					
1300	1.040					

Figure 3 Summary page in Multimode

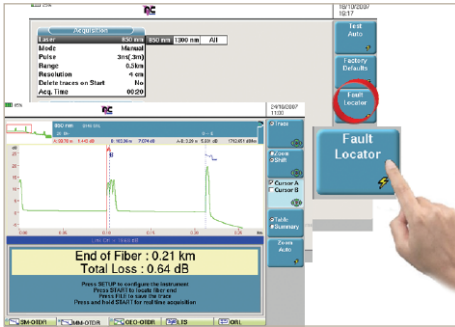


Figure 4 Fault locator mode

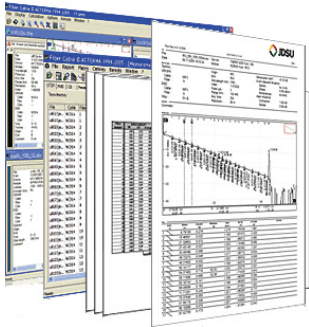


Figure 5 Acceptance report



Figure 6 MTS/T-BERD 6000 platform with OTDR module

### Test 10 GigE and Enterprise networks with the best-available performance

With the combination of an impressive acquisition time, event dead zone, and dynamic range, technicians are able to test any type of LAN with unprecedented accuracy using the SRL OTDR Module:

- Optimized for any type of multimode Ethernet link, including 10 GigE according to IEEE 802.3ae (10GBase-SX/LX)
- Complies with ITU-T G.651, the SRL OTDR module provides two mono-wavelength versions (850 and 1300 nm) and one dual-wavelength version (850/1300 nm)
- Combines a high dynamic range and short event dead zone in order to characterize short fiber lengths

### Two-in-one functionality... From simple Fault Locator to Expert OTDR

MTS/T-BERD platforms combine a powerful, easy-to-use Fault Locator and a complete, fully-configurable OTDR instrument. With the SRL OTDR module, you are free to test LAN and Access networks according to your own needs!

The Fault Locator boosts your productivity in the field by providing:

- Completely automatic, no settings required
- One-click operation
- End of fiber, Loss and ORL displayed automatically after measurement

The advanced mode offers high-level trace analysis possibilities, making your MTS/T-BERD platform a powerful instrument for commissioning and troubleshooting by offering:

- Manual settings (pulse, average time, events)
- Connector and Splice characterization
- A large screen for convenient multi-trace analysis (with zoom, cursors)
- A detailed event table

### Error-free professional report

A complete PC-based software application within a Microsoft Windows environment offers detailed generation of professional OTDR trace reports, including:

- Proof-of-performance reports with a high degree of customization capabilities
- Dedicated tables for each test result (splice loss, connector, and length)
- Out-of-range value summaries with analysis of macro-bends
- Results comparison between the different wavelengths to identify bends and constraints
- Complete fiber characterization reports, including OTDR, CD, PMD, and spectral attenuation

### Enhanced testing solution

The SRL OTDR module is compatible with the MTS/T-BERD 6000 optical test platform and its full range of fiber characterization test modules (OTDR, CD, and spectral attenuation measurement) as well as DWDM testing capabilities. The SRL OTDR module is also compatible with the scalable MTS/T-BERD 8000 platform and can be combined with additional measurement capabilities that comprise the broadest fiber optic test solution on the market, making JDSU the provider of choice for all telecommunications operators and fiber optic installers.

**Specifications**
**Multimode/Singlemode SRL**
**OTDR Module General (typical at 25°C)**

Weight	0.6 kg (1.1 lb)
Dimensions (w x h x d)	213 x 124 x 32 mm (8.38 x 4.88 x 1.26 in)

**Optical interfaces**

Applicable fiber	MMF 50/125 μm, MMF 62.5/125 μm, SMF 9/125 μm
Interchangeable optical connectors	FC, SC, DIN, LC and ST

**Technical characteristics**

Distance units	Kilometers, feet, and miles
Group index range	1.30000 to 1.70000 in 0.00001 steps
Number of data points	Up to 128,000 data points
Distance measurement	Automatic or dual cursor
Display range	2.6 m to 260 km
Cursor resolution	1 cm
Sampling resolution	4 cm
Distance Accuracy	±1 m ±sampling resolution ±1.10-5 x distance (Excluding group index uncertainties)

**Attenuation measurement**

Automatic, manual, 2-point, 5-point, and LSA	
Display range	1.25 dB to 55 dB
Display resolution	0.001 dB
Cursor resolution	0.001 dB
Linearity	Multimode / Singlemode: ±0.03 dB/dB
Threshold	0.01 to 5.99 dB in 0.01 dB steps

**Reflectance/ORL measurements**

Reflectance accuracy	+/-2 dB
Display resolution	0.01 dB
Threshold	-11 dB to -99 dB in 1 dB steps
Storage	Bellcore/Telcordia compatible Version 1.1 and Version 2.0

**Ordering information**

Short Range LAN 24dB 850nm OTDR plug-in	E8111SRL
Short Range LAN 24dB 1300nm OTDR plug-in	E8112SRL
Short Range LAN 24/24dB 850/1300 OTDR plug-in	E8123SRL
Short Range LAN 24/24/40/38dB 850/1300/1310/1550nm OTDR plug-in	E8146SRL
Short Range LAN 24/24/40/38/37dB 850/1300/1310/1550/1625nm OTDR plug-in	E8156SRL
Continuous Source option (singlemode wavelength only)	E810TDRLS

**Universal optical connectors**

Straight connectors (singlemode port)  
EUNIPCFC, EUNIPCSC, EUNIPCST, EUNIPCDIN, EUNIPCLC  
8° angled connectors (singlemode port)  
EUNIAPCFC, EUNIAPCSC, EUNIAPCST, EUNIAPCDIN, EUNIAPCLC  
Straight connectors (multimode port)  
EUNIPCFMCM, EUNIPCSCMM, EUNIPCSTMM, EUNIPCDINMM

*For more information on the MTS/T-BERD platforms, test modules, adapters, cables, and fiber optic couplers, refer to the separate datasheets and brochures.*

**OTDR Optical performance–Multimode SRL Plug-in**

Central Wavelength <sup>1</sup>	Laser safety class (21 CFR)	Pulse Width	Distance Range	RMS Dynamic Range <sup>2</sup>	Event Dead Zone <sup>3</sup>	Attenuation Dead Zone <sup>4</sup>	Continuous Wave Output Power
850/1300 nm ±20 nm	Class 1M	3 ns to 300 ns	Up to 80 km	24/24 dB	0.5 m	2 m	–

**OTDR Optical performance–Multimode/Singlemode SRL Plug-in**

Central Wavelength <sup>1</sup>	Laser safety class (21 CFR)	Pulse Width	Distance Range	RMS Dynamic Range <sup>2</sup>	Event Dead Zone <sup>3</sup>	Attenuation Dead Zone <sup>4</sup>	Continuous Wave Output Power
850/1300 nm ±20 nm	Class 1M	3 ns to 300 ns	Up to 80 km	24/24 dB	0.5 m	2 m	–
1310/1550/1625 nm ±20 nm	Class 1M	3 ns to 20 μs	Up to 380 km	40/38/37 dB	0.8 m	4 m	-3.5 dBm

<sup>1</sup>Laser at 25°C and measured at 10 μs. Other wavelengths are available.

<sup>2</sup>The one-way difference between the extrapolated backscattering level at the start of the fiber and the RMS noise level, after 3 minutes averaging.

<sup>3</sup>Measured at ±1.5 dB down from the peak of an unsaturated reflective event.

<sup>4</sup>Measured at ±0.5 dB from the linear regression using a FC/PC type reflectance.

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2007 JDS Uniphase Corporation. All rights reserved. 30149276 000 0108 SRL.DS.FOP.TM.AE

**Test & Measurement Regional Sales**

<b>NORTH AMERICA</b> TOLL FREE: 1 866 228 3762 FAX: +1 301 353 9216	<b>LATIN AMERICA</b> TEL: +55 11 5503 3800 FAX: +55 11 5505 1598	<b>ASIA PACIFIC</b> TEL: +852 2892 0990 FAX: +852 2892 0770	<b>EMEA</b> TEL: +49 7121 86 2222 FAX: +49 7121 86 1222	<a href="http://www.jdsu.com/test">www.jdsu.com/test</a>
---	--	---	---	--