

MODEL 61509/61508/61507/ 61609/61608/61607

KEY FEATURES

- Power rating
 - 61509/61609: 6kVA
 - 61508/61608: 4.5kVA
 - 61507/61607: 3kVA
- Voltage range: 0-175V/0-350V/Auto
- Frequency: DC, 15Hz-2kHz (5kHz option)
- 5U high power density design
- Single-phase or three-phase output selectable
- Programmable slew rate setting for changing voltage and frequency
- Programmable voltage and current limit
- High output current crest factor for inrush current testing
- Turn on and turn off phase angle control
- TTL signal which indicates output transient
- LIST, PULSE, STEP mode functions for testing Power Line Disturbance (PLD) simulation
- Voltage dips, short interruption, and voltage variation simulation
- Harmonics and inter-harmonics waveform synthesizer
- Comprehensive measurement capability including current harmonics
- Analog programmable interfaces
- Remote interface: GPIB, RS-232, USB, and Ethernet
- Higher output power capability by implementing master-slave parallel output function

PROGRAMMABLE AC POWER SOURCE MODEL 61509/61508/61507/ 61609/61608/61607

The global market for AC power testing demands for a more sophisticated, high performance AC source capable of simulating a wide range of AC line conditions. To meet these demands, Chroma has developed a high power density, low form factor (5U) instrument. The Chroma 61509/61508/61507/61609/61608/61607 models are the latest of the 61500/61600 series AC Source. The Chroma 61500/61600 series programmable AC source are the right solutions to meet complex single and three phase requirements due to their ability to simulate AC line conditions and measure critical product characteristics during testing. These features make the 61500/61600 series ideal for commercial, power electronics, avionics, military, and regulation test applications from bench-top R/D design verification and quality assurance to mass production. DC functionality enhancements, with DC power ratings of up to 100% of full output power, has further extended test application capabilities especially for AC/DC server PSU.

Using state of the art PWM technology, the 61509/61508/61507/61609/61608/61607 models deliver maximum output voltage of up to 350Vac and output frequency of 15Hz to 2000Hz. All models possess the ability to generate pure sine waveform output with typical distortion of less than 0.3% at 50/60Hz.

The Chroma 61500/61600 series are able to provide precision measurements such as RMS voltage, RMS current, true power, power factor, current crest factor, and so on. By applying the advanced DSP technology, the 61509/61508/61507 models easily simulate power line disturbance (PLD) by LIST, PULSE, and STEP modes.

The Chroma 61500 series allow users to compose different harmonic components to synthesize various harmonic and distorted waveforms. By applying this advanced feature, users can program a sweeping frequency component incorporated with the fundamental voltage for finding the resonance points of the UUT, thus providing users with in-depth analytical results.

To simulate the natural waveforms, the Chroma 61500/61600 series provide an external analog input to amplify the analog signal generated by an arbitrary signal generator. Thus, users can implement this feature to duplicate unique waveforms observed in the field. The user friendly interface allows for quick access to the 61509/61508/61507/61609/61608/61607 AC sources' functions through a large graphic LCD display front panel with an easy to use keypad. The GPIB, RS-232, USB, and Ethernet interfaces are available to control the AC source remotely.



Chroma

COMPREHENSIVE MEASUREMENTS


Chroma AC Power Source 61500/61600 series have built-in 16-bit measurement circuits and firmware utilities to measure the true RMS voltage, current, true power, apparent power, reactive power, power factor, current crest factor, repetitive peak current, and inrush current. Using advanced DSP technology, the 61500 series can measure THD and up to 50 orders of current harmonics. The 5.7" Color LCD provide users with easy to operate interface by integrating parameters and functions on a single display page. The panel is also capable of voltage and current measurement waveform display.

3_Phase 350V LOCAL QUIT					
OUTPUT SETTING					
#1 Vac =	0.0V	F =	60.00Hz	Main	
#2 Vac =	0.0V	F =	60.00Hz	OUTPUT: More Setting	
#3 Vac =	0.0V	F =	60.00Hz	Measurement Setting	
MEASUREMENT					
#1 V =	0.00	P _o =	0.0	Waveform Viewer	
#1 I =	0.000	PF =	0.000	Limitation	
#2 V =	0.00	P _o =	0.0	Output Mode	
#2 I =	0.000	PF =	0.000	Measurement To Page2	
#3 V =	0.00	P _o =	0.0		
#3 I =	0.000	PF =	0.000		
V ₁₂ =	0.00	V ₂₃ =	0.00		
V ₃₁ =	0.00	P _o =	0.0		
Recall CH1	Recall CH2	Recall CH3	Recall CH4	Recall CH5	More 1 of 2
					2017/11/20 19:27:19


3_Phase 350V LOCAL OUT					
OUTPUT SETTING					
#1 Vac =	20.0V	F =	60.00Hz	Setting	
#2 Vac =	20.0V	F =	60.00Hz	OUTPUT: More Setting	
#3 Vac =	20.0V	F =	60.00Hz	Measurement Setting	
WAVEFORM VIEWER					
CH1 :	#1V	Waveform Viewer			
CH2 :	#2V	Limitation			
CH3 :	#3V	Output Mode			
					Wave Download On
CH1 #1V	CH2 #2V	CH3 #3V	V Scale 15 V/div	I Scale 5 A/div	Time Scale 2 ms/div
					2018/04/13 16:00:22

POWER LINE DISTURBANCE SIMULATION (61500 SERIES)


In addition to the ability to program steady output voltage and frequency, The Chroma 61500 series provides powerful functions to simulate all kinds of power line disturbance conditions. The STEP and PULSE modes offer easy and convenient methods to execute single step or continuous output changes. The changes may be triggered by an internal or external event. This allows for an easy simulation of power line disturbances such as cycle dropout, transient spike, brown out, etc. The LIST mode extends this function for more complex waveform generator needs of up to 100 sequences with different start-end conditions that can perform almost any waveform by AC and DC components. The Chroma AC power source 61500 series is also capable of simulating all sorts of voltage dips, interruptions, and variation waveforms for IEC 61000-4-11 pre-compliance tests and IEC61000-4-14/IEC61000-4-28 compliance tests.

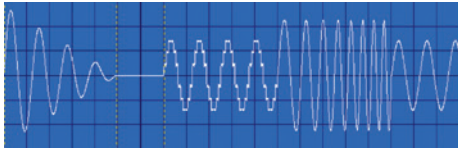


LIST Mode

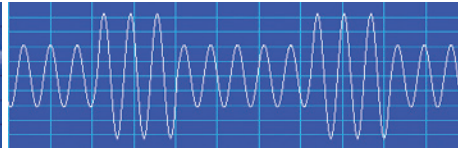

PULSE Mode

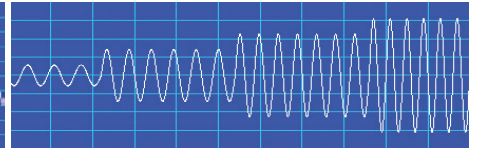


STEP Mode

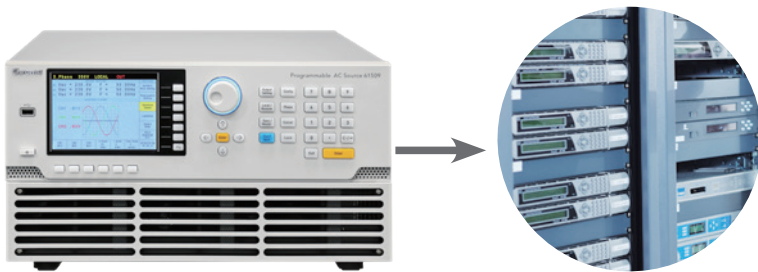


Server Power

The 61509/61508/61507 models are capable of simulating the below voltage waveform test requirements for dual input AC/DC server PSU.

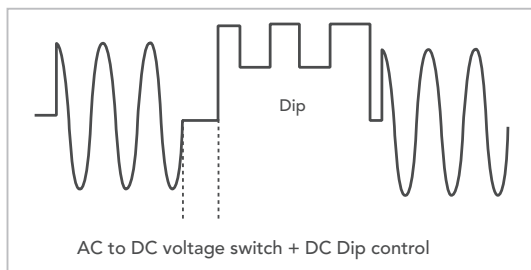


Voltage waveform test requirement

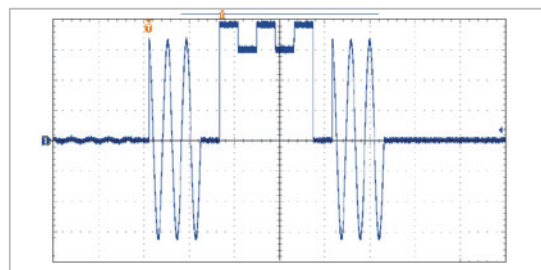

Actual output voltage waveform

The 61509/61508/61507 models are capable of simulating the voltage dips, short interruptions and voltage variations test conditions for the IEC 61000-4-29* Electromagnetic compatibility (EMC) - Part 4-29: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests with test levels (%UT) listed in the table below.

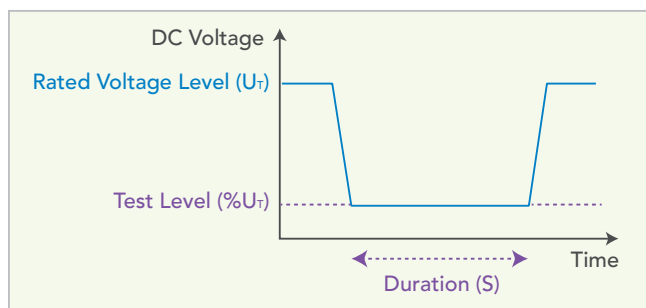


DC Input Power Immunity Test

Test Conditions	Test level (%UT)	Duration (s)
Voltage Dips	40%~70% of rated DC voltage	0.01~1
Short Interruptions	0% of rated DC voltage	0.001~1
Voltage Variations	80%~120% of rated DC voltage	0.1~10


* Pre-compliance for IEC 61000-4-29 Standard

SLEW RATE SETTING FOR VOLTAGE AND FREQUENCY

Both 61500 and 61600 models allow users to set the slew rate of voltage and frequency. The program will follow the slew rate used to reach the final setting when the output voltage or frequency is changed. This function helps users verify the operating range of input power. For example, users can sweep voltage gradually from 90V to 264V instead of only measuring in steps such as 90V, 115V, 230V, and 264V. Additionally, in order to reduce the inrush current during motor startup or UUT power-up, users can decrease the slew rate setting to minimize peak current demands.

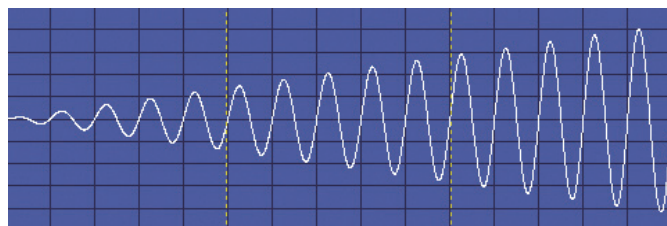

Output voltage waveform based on voltage of slew rate setting

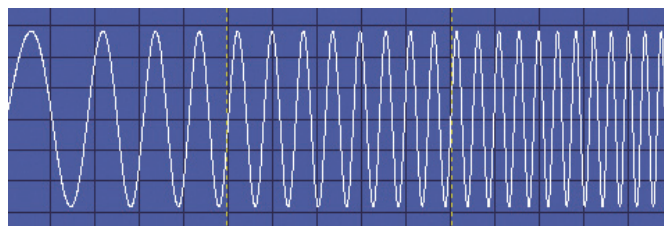


Output voltage waveform based on frequency of slew rate setting

DISTORTION WAVEFORM, HARMONICS, AND INTERHARMONICS (61500 SERIES)

Traditional types of AC sources only provide output voltages with SIN waveforms; these types of AC sources are unable to meet or keep up with the latest test requirements needed for simulating the input voltage's abnormal conditions with distorted waveforms. The WAVEFORM function allows users to set square, clipped-sine waves and 30 stored distortion waveforms. Besides that, IEC 61000-4-13 standard requires interharmonics simulations as well as harmonic waveforms.

The Chroma 61500 series allows user to compose up to 50 orders of harmonics based on 50Hz or 60Hz; the output will be a periodic harmonics distortion waveform. It also provides sweeping inter-harmonics functions. This means the fundamental frequency will be incorporated with a frequency sweeping component between harmonic frequencies. It can help find the resonance or the weakest points of the UUTs. The Chroma 61500 series uses advanced DSP technology to synthesize the harmonic and inter-harmonics waveforms. Therefore, it is capable of generating periodic harmonic and non-periodic harmonic distorted waveforms to perform IEC 61000-4-13 compliance tests.


1_Phase SYNTHESIS QUIT									
SYNTHESIS WAVEFORM FUNDAMENTAL SETTING									
Vac fundamental = 0.0V		Vdc = 0.0V		F fundamental = 60Hz		Degree = 0.0°		Synthesis	
N	V	φ	N	V	φ	N	V	φ	Compose Value-1
2	0.00	0.0	19	0.00	0.0	38	0.00	0.0	
3	0.00	0.0	20	0.00	0.0	37	0.00	0.0	
4	0.00	0.0	21	0.00	0.0	36	0.00	0.0	
5	0.00	0.0	22	0.00	0.0	35	0.00	0.0	
6	0.00	0.0	23	0.00	0.0	40	0.00	0.0	
7	0.00	0.0	24	0.00	0.0	41	0.00	0.0	
8	0.00	0.0	25	0.00	0.0	42	0.00	0.0	
9	0.00	0.0	26	0.00	0.0	43	0.00	0.0	
10	0.00	0.0	27	0.00	0.0	44	0.00	0.0	
11	0.00	0.0	28	0.00	0.0	45	0.00	0.0	
12	0.00	0.0	29	0.00	0.0	46	0.00	0.0	
13	0.00	0.0	30	0.00	0.0	47	0.00	0.0	
14	0.00	0.0	31	0.00	0.0	48	0.00	0.0	
15	0.00	0.0	32	0.00	0.0	49	0.00	0.0	
16	0.00	0.0	33	0.00	0.0	50	0.00	0.0	
17	0.00	0.0	34	0.00	0.0				
18	0.00	0.0	35	0.00	0.0				

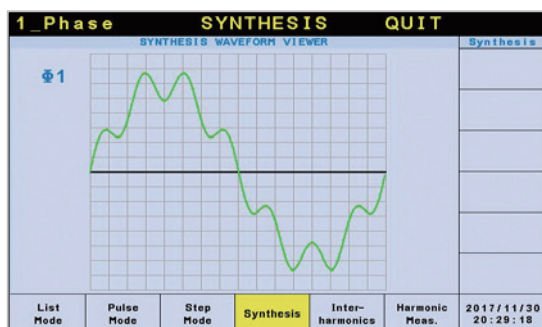


SINGLE PHASE AND THREE PHASE OUTPUT

Model 61509/61508/61507/61609/61608/61607 AC sources are capable of delivering single or three-phase output depending on the application. Users can select these output modes easily through the front panel or by remote control. All models are able to provide full power output without derating even in single phase output configuration.

Single Phase

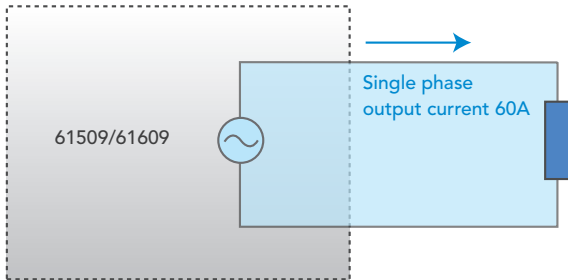


Three-phase

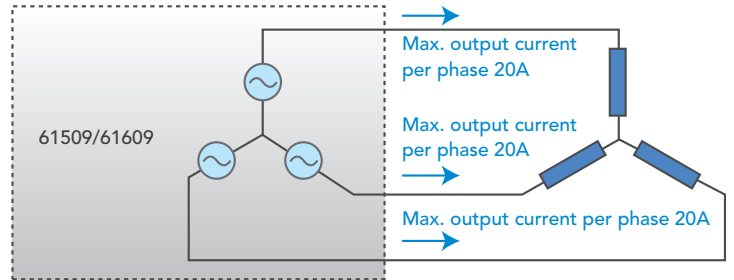


AC SOURCE PARALLEL OUTPUT FUNCTION

The 61509/61508/61507/61609/61608/61607 AC source models provide (Master-Slave) parallel output functions, which enable users to extend the AC source power output ability by connecting up to 2 units in parallel configuration. For example: connection two 61509 6kVA units will achieve total output power of 12kVA or connecting one 61509 6kVA with one 61607 3kVA unit will achieve total output power of 9kVA.

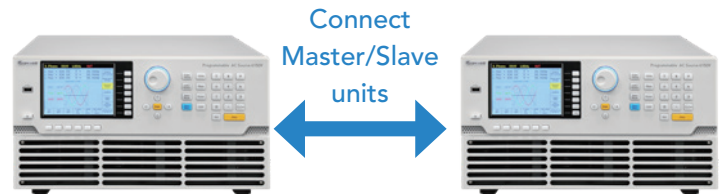


SOFTPANEL

Chroma's Softpanel is a graphical user interface that provides extraordinary capabilities and convenience by delivering control of the unit remotely. The 61500/61600 series Softpanel is designed to offer users control of the AC source by applying user friendly interfaces configured in graphical and instrument like settings. The user-friendly graphical interface makes enabling extensive functions of the AC source possible with just a few clicks.

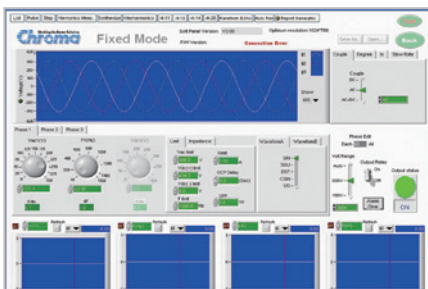

Main Operation Menu

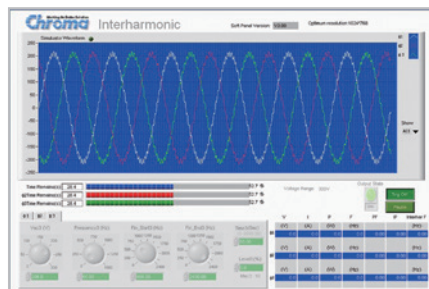

Interharmonic Test




Transient Voltage Programming



Voltage DIP, Short Interruption, Variation Test



Distorted Waveform Editor

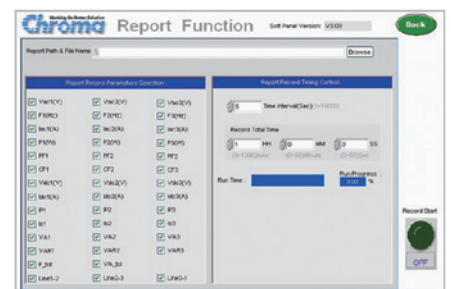

Recording Function

SPECIFICATIONS

Model	61507	61607	61508	61608	61509	61609
AC Output Rating						
Output Phase	1 or 3 selectable					
Max. Power	3kVA		4.5kVA		6kVA	
Per Phase	1kVA		1.5kVA		2kVA	
Voltage						
Range	0~175V/0~350V/Auto					
Range	@15Hz~3000Hz	0~175V/0~350V	--	0~175V/0~350V	--	0~175V/0~350V
(5kHz Option)	@3001Hz~5000Hz	0~115V/0~230V	--	0~115V/0~230V	--	0~115V/0~230V
Setting Accuracy	0.1% of RD+0.2% of FS					
Resolution	0.1 V					
Distortion *1	< 0.3% @50/60Hz ; < 1% @15Hz ~ 500Hz ; 1% maximum to 500Hz, add 0.5%/kHz up 2kHz					
Line Regulation	0.10%					
Load Regulation *2	0.20%					
Maximum Current (1-Phase Mode)						
RMS	30A/15A		45A/22.5A		60A/30A	
Peak (CF=4)	120A/60A		180A/90A		240A/120A	
Maximum Current (each phase in 3-Phase Mode)						
RMS	10A/5A		15A/7.5A		20A/10A	
Peak (CF=4)	40A/20A		60A/30A		80A/40A	
Frequency						
Range	15Hz~2000Hz					
Range (5kHz Option)	15Hz~5000Hz	--	15Hz~5000Hz	--	15Hz~5000Hz	--
Accuracy	0.01%					
DC Output (1-Phase Mode)						
Power	3kW		4.5kW		6kW	
Voltage	247.5V/495V		247.5V/495V		247.5V/495V	
Current	30A/15A		45A/22.5A		60A/30A	
DC Output (3-Phase Mode)						
Power	1kW		1.5kW		2kW	
Voltage	247.5V/495V		247.5V/495V		247.5V/495V	
Current	10A/5A		15A/7.5A		20A/10A	
Input Rating						
Voltage Operating Range *3	3Ø 200-240V ± 10%V _{LN} (WYE) ; 3Ø 200-240V ± 10%V _{L-L} (Delta)					
Current	15A Max./Phase (3Ø 200-240V ± 10%V _{LN})		20A Max./Phase (3Ø 200-240V ± 10%V _{L-L})		25A Max./Phase (3Ø 200-240V ± 10%V _{LN})	
Power Factor	0.97 (Typical)					
Measurement						
Voltage						
Range	0~175V/0~350V/Auto					
Accuracy	0.1% of RD+0.2% of FS					
Current						
Accuracy (RMS)	0.2% of RD+0.2% of FS					
Accuracy (peak)	0.2% of RD+0.4% of FS					
Power						
Accuracy	0.2% of RD+0.4% of FS					
Power Line Distortion Simulation	LIST/PULSE/ STEP functions	--	LIST/PULSE/ STEP functions	--	LIST/PULSE/ STEP functions	--
Waveform Synthesis	50 orders @50/60Hz	--	50 orders @50/60Hz	--	50 orders @50/60Hz	--
Harmonics Measurement	Voltage/Current 50 orders @50/60Hz	--	Voltage/Current 50 orders @50/60Hz	--	Voltage/Current 50 orders @50/60Hz	--
Others						
Programmable Impedance	0Ω+0.2mH ~ 1Ω+2mH					
Efficiency *4	>80%(Typical)					
Protection	OVP, OCP, OPP, OTP, FAN					
Safety & EMC	CE mark					
Dimension (H x W x D)	221.5 x 425 x 680mm / 8.72 x 16.73 x 26.77inch					
Weight	50kg / 110 lbs					

Note *1 : Maximum distortion is tested on output 125VAC (175V RANGE) and 250VAC (350V RANGE) with full output power under linear load.


Note *2 : Load regulation is tested with sine wave and remote sense.

Note *3 : Support input voltage in WYE (3 phase 5 wire) connection; Delta (3 phase 4 wire) connection.

Note *4 : Efficiency is tested on input voltage 220V.

* All specifications are subject to change without notice.

PANEL DESCRIPTION

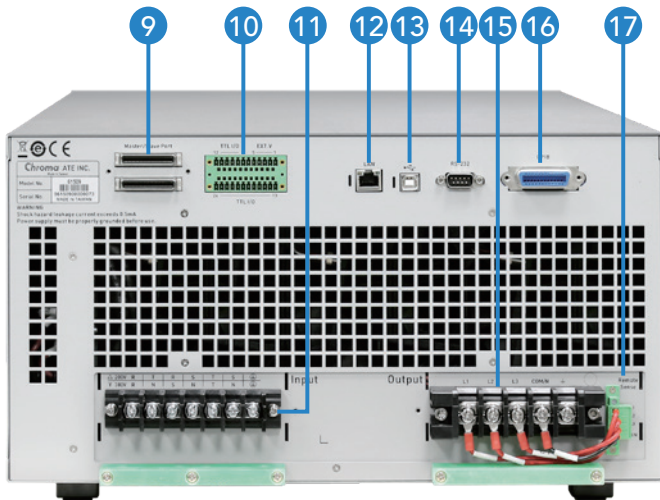

1. USB Host
2. ON/OFF Power Switch
3. LCD Display
5.7 inch graphic LCD display for settings and measurements read back
4. Soft key
Supports menu driven interface
5. Rotary Knob
For adjusting voltage, frequency, and other parameter settings
6. Cursor key
For cursor movement
7. Function key
Hot keys for quick parameter settings
8. Numeric key
For data setting
9. Master/Slave Port
For parallel application
10. External V reference/TTL I/O Port
External analog signal for voltage control and signal for system integration
11. Input Terminal
12. Ethernet Interface
13. USB Interface
14. RS232 Interface
15. Output Terminal
16. GPIB Interface
17. Remote Sense
For output voltage compensation

ORDERING INFORMATION

- 61507 : Programmable AC Source 0~350V, 15~2kHz / 3kVA
- 61508 : Programmable AC Source 0~350V, 15~2kHz / 4.5kVA
- 61509 : Programmable AC Source 0~350V, 15~2kHz / 6kVA
- 61607 : Programmable AC Source 0~350V, 15~2kHz / 3kVA
- 61608 : Programmable AC Source 0~350V, 15~2kHz / 4.5kVA
- 61609 : Programmable AC Source 0~350V, 15~2kHz / 6kVA
- A615007 : Softpanel for Model 61500 Series
- B615000 : 5kHz output frequency option (for 61507/61508/61509 only)
(factory installation)

Get more product & distributor information in Chroma ATE APP



iOS



Android

Search Keyword

61509

HEADQUARTERS
CHROMA ATE INC.
66 Huaya 1st Road,
Guishan, Taoyuan
33383, Taiwan
T +886-3-327-9999
F +886-3-327-8898
www.chromaate.com
info@chromaate.com

U.S.A.
CHROMA SYSTEMS
SOLUTIONS, INC.
19772 Pauling,
Foothill Ranch,
CA 92610
T +1-949-600-6400
F +1-949-600-6401
www.chromausa.com
sales@chromausa.com

EUROPE
CHROMA ATE
EUROPE B.V.
Morsestraat 32,
6716 AH Ede,
The Netherlands
T +31-318-648282
F +31-318-648288
www.chroma.eu.com
sales@chroma.eu.com

CHROMA GERMANY GMBH
Südtiroler Str. 9, 86165,
Augsburg, Germany
T +49-821-790967-0
F +49-821-790967-600
www.chroma.eu.com
sales@chroma.eu.com

JAPAN
CHROMA JAPAN
CORP.
888 Nippa-cho,
Kohhoku-ku,
Yokohama-shi,
Kanagawa,
223-0057 Japan
T +81-45-542-1118
F +81-45-542-1080
www.chroma.co.jp
info@chroma.co.jp

KOREA
CHROMA ATE
KOREA BRANCH
3F Richtogether
Center, 14,
Pangyojeok-ro 192,
Bundang-gu,
Seongnam-si,
Gyeonggi-do
13524, Korea
T +82-31-781-1025
F +82-31-8017-6614
www.chromaate.co.kr
info@chromaate.com

CHINA
CHROMA ELECTRONICS
(SHENZHEN) CO., LTD.
8F, No.4, Nanyou Tian
An Industrial Estate,
Shenzhen, China
T +86-755-2664-4598
F +86-755-2641-9620
www.chroma.com.cn
info@chromaate.com

SOUTHEAST ASIA
QUANTEL PTE LTD.
(A company of Chroma Group)
46 Lorong 17 Geylang # 05-02
Enterprise Industrial Building,
Singapore 388568
T +65-6745-3200
F +65-6745-9764
www.quantel-global.com
sales@quantel-global.com